# **Admiral** FAD 906-P XS

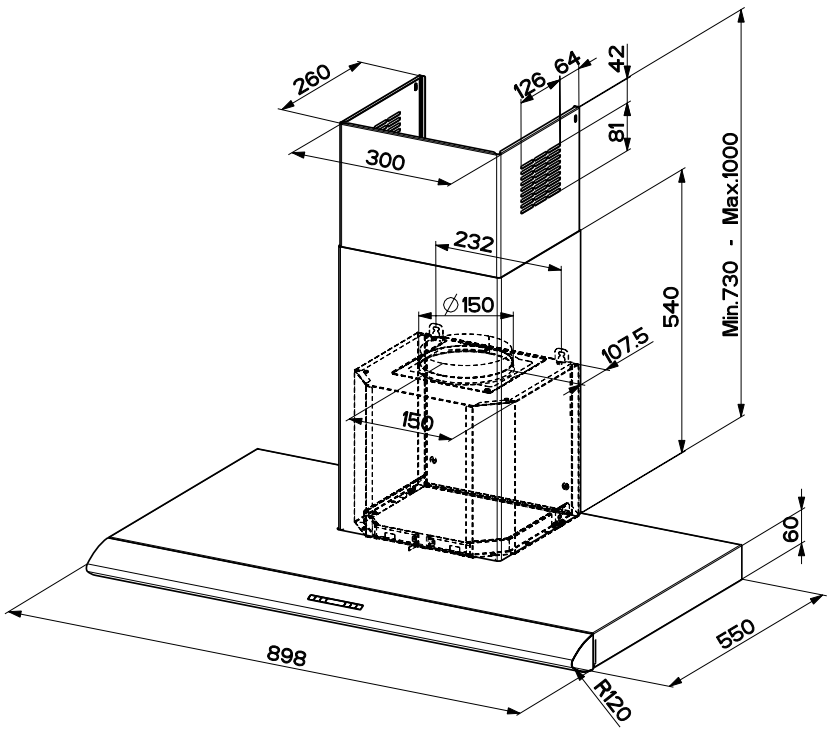


| Speed | Flow Rate IEC 61591 [M³/H] 1 | Flow Rate IEC 61591 [M³/H] 2 | Pressure Maximum [Pa] | Power Input [W] | Sound Power IEC 60704-2-13 [dB(A)] |
|---|---|---|---|---|---|
| I | 270 | 260 | 360 | 135 | 47 |
| II | 430 | 410 | 450 | 170 | 55 |
| III | 570 | 520 | 480 | 215 | 62 |
| Int | 700 | 630 | 500 | 250 | 66 |

1 (200 m³/h, 5 Pa) Resistance curve according to IEC 61591
2 (200 m³/h, 15 Pa) Resistance curve according to IEC 61591

| Model | FAD 906-P XS |
|---|---|
| Hood type | Wall |
| Width | 90cm |
| Control type | Electronic |
| Finish | Stainless Steel |
| Extraction speed setting | 3 + int. |
| Automatic cut-off timer | ■ |
| Continuous 24 hour ventilation | |
| Digital Display | ■ |
| Filtering function | ■ |
| Motor | ENERGY |
| Filter type | B |
| Perimetric extraction | |
| Easy fit | ■ |
| Remote control | |
| Filter saturation indicator | |
| Illumination | Halogen 3 x 20W |
| Comfort light | |
| Grease filter | Stainless Steel |
| Outlet tube diameter | 150mm (120mm adaptor supplied) |