Decorative Soft FDS 954 XS

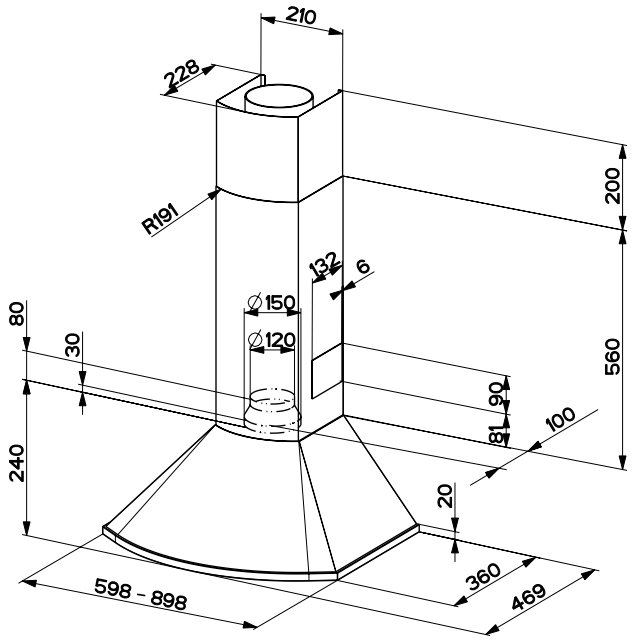

Speed	Flow Rate IEC 61591 [M³/H] 1	Flow Rate IEC 61591 [M³/H] 2	Pressure Maximum [Pa]	Power Input [W]	Sound Power IEC 60704-2-13 [dB(A)]
I	250/230		210	80	50
II	300/280		240	115	57
III	470/460		250	190	64

1 (200 m^3/h, 5 Pa) Resistance curve according to IEC 61591
2 (200 m^3/h, 15 Pa) Resistance curve according to IEC 61591

Model	FDS 954 XS
Hood type	Wall
Width	90cm
Control type	Push buttons
Finish	Stainless Steel
Extraction speed setting	3
Automatic cut-off timer	
Continuous 24 hour ventilation	
Digital Display	
Filtering function	■
Motor	K50
Filter type	A
Perimetric extraction	
Easy fit	
Remote control	
Filter saturation indicator	
Illumination	Incandescent 2 x 40W
Comfort light	
Grease filter	Aluminium cassette
Outlet tube diameter	150mm (120mm adaptor supplied)