Glass Curved FGC 604 XS

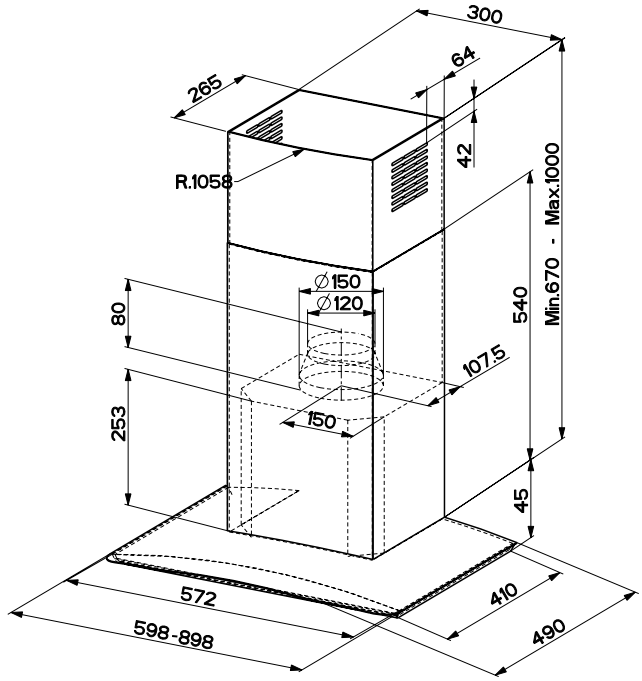

Speed	Flow Rate IEC 61591 [M³/H] 1	Flow Rate IEC 61591 [M³/H] 2	Pressure Maximum [Pa]	Power Input [W]	Sound Power IEC 60704-2-13 [dB(A)]
I	240	220	170	70	46
II	280	260	200	100	52
III	420	390	220	150	61

1 (200 m³/h, 5 Pa) Resistance curve according to IEC 61591
2 (200 m³/h, 15 Pa) Resistance curve according to IEC 61591

Model	FGC 604 XS
Hood type	Wall
Width	60cm
Control type	Push buttons
Finish	Stainless Steel/Glass
Extraction speed setting	3
Automatic cut-off timer	
Continuous 24 hour ventilation	
Digital Display	
Filtering function	■
Motor	K40
Filter type	B
Perimetric extraction	
Easy fit	■
Remote control	
Filter saturation indicator	
Illumination	Halogen 2 x 20W
Comfort light	
Grease filter	Aluminium cassette
Outlet tube diameter	150mm (120mm adaptor supplied)