Glass Curved FGC 906 XS

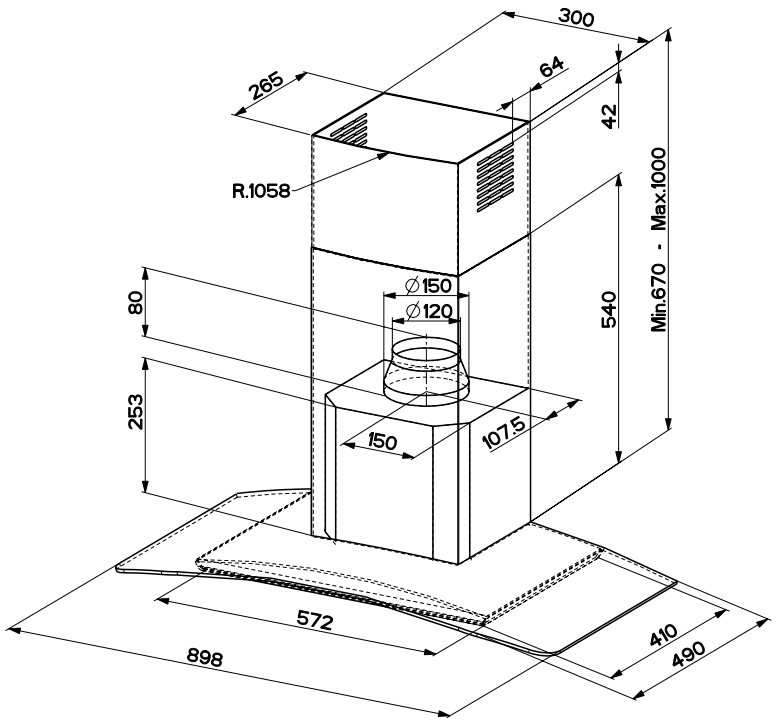

Speed	Flow Rate IEC 61591 [M³/H] 1	Flow Rate IEC 61591 [M³/H] 2	Pressure Maximum [Pa]	Power Input [W]	Sound Power IEC 60704-2-13 [dB(A)]
I	260	250	140	90	51
II	330	310	200	115	55
III	470	430	260	145	63
Int	600	520	280	190	67

1 (200 m³/h, 5 Pa) Resistance curve according to IEC 61591
2 (200 m³/h, 15 Pa) Resistance curve according to IEC 61591

Model	FGC 906 XS
Hood type	Wall
Width	90cm
Control type	Electronic
Finish	Stainless Steel/Glass
Extraction speed setting	3 + int.
Automatic cut-off timer	
Continuous 24 hour ventilation	
Digital Display	■
Filtering function	■
Motor	HIP
Filter type	B
Perimetric extraction	
Easy fit	■
Remote control	
Filter saturation indicator	
Illumination	Halogen 2 x 20W
Comfort light	
Grease filter	Stainless Steel
Outlet tube diameter	150mm (120mm adaptor supplied)