

Product Finish: **Antique Brass**

Product code: **AT1047**
 EAN13 barcode: **5060048380460**



Product features:

- Supplied with fixed 1/2" inlets
- Traditional French provincial styling
- Quarter turn handle action for precise flow control
- Swivel aerator connector for maximum flexibility
- Custom designed for lower to mid pressures


Additional information / Parts included:

180mm centres, 40° revolve aerator

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

- **Overall Height / projection:** 268 mm
- **Exit reach:** 230 mm
- **Exit height:** 170 mm
- **Centre distance(s):**

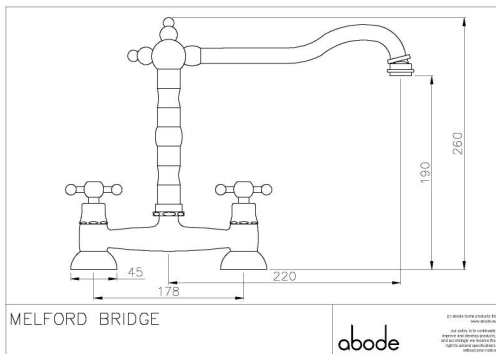


- **Base diameter(s):** 45 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 60 mm

- **Spout diameter:** 18 mm
- **Spout aerator size:** 22f

Packaged properties:

- Box length:** 560mm
- Box depth:** 75mm
- Box width:** 360mm
- Units per outer:** 5
- Tap only weight:** 1.84kg
- Boxed weight:** 2.48kg

Product flow characteristics:

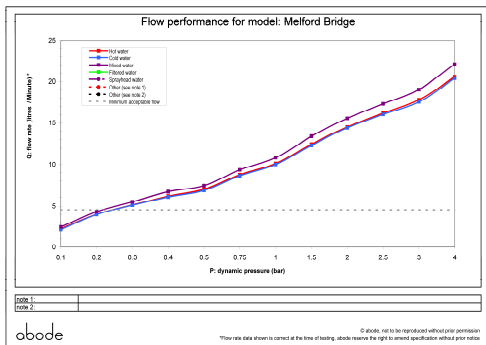

- **Min / Max water pressure:** 0.30 / 5.50 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 19.08

- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** Single flow
- **Non return valve(s):** No, none supplied

- **Aerator type:** Plastic mesh diffuser
- **Accepts revolve / spray areator:** Yes
- **Spout connection method:** Locking collar

- **Tail pipe inlet / outlet size:** / 1/2" BSP Male
- **Inlet pipe type / length:** fixed threaded inlets / 100 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year