


PRONTEAU tap features:


- Traditional styling
- Push down and twist safety lock hot handle
- Scale inhibiting filter cartridge included
- Insulated 180° Swivel spout for maximum flexibility
- Single lever control for effortless single handed control
- 5 Year Warranty*
- WRAS approval pending

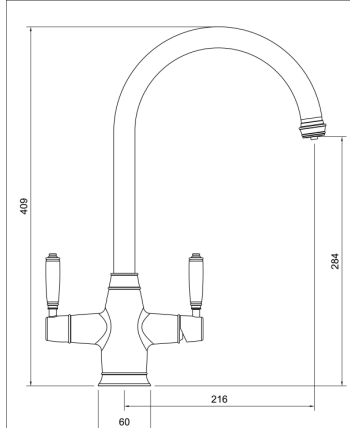

PROTRAD
3 in 1 Monobloc - v1

abode

- **Overall Height / projection:** 409 mm
- **Exit spout reach:** 216 mm
- **Exit spout height:** 284 mm
- **Base diameter(s):** 60 mm
- **Recommended hole diameter:** Ø35 mm
- **Max. surface installation depth:** 50 mm
- 68mm from centre of tap hole to wall/backplash behind wall (Single lever handle rotates backwards 50°)

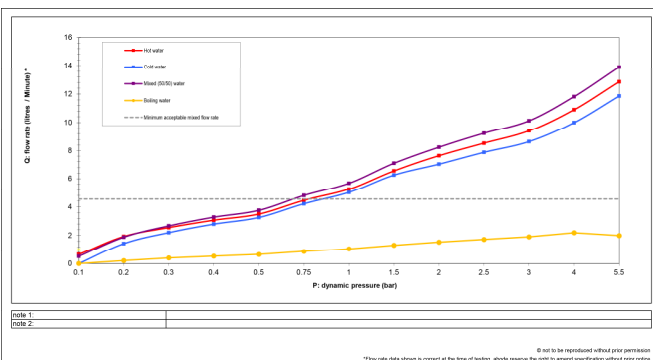

Flow rate graph details:

- Hot water (red line)
- Cold water (blue line)
- Mixed (50/50) water (purple line)
- Boiling water (yellow line)
- Minimum acceptable flow rate (dashed horizontal line at ~4.5 l/min)

Approximate data points from graph:

Dynamic Pressure (bar)	Hot Water (l/min)	Cold Water (l/min)	Mixed (50/50) Water (l/min)	Boiling Water (l/min)
0.1	1.0	1.0	1.0	1.0
0.2	1.5	1.5	1.5	1.0
0.3	2.0	2.0	2.0	1.0
0.4	2.5	2.5	2.5	1.0
0.5	3.0	3.0	3.0	1.0
0.75	4.0	4.0	4.0	1.0
1.0	5.0	5.0	5.0	1.0
1.5	6.5	6.5	6.5	1.0
2.0	8.0	7.5	7.5	1.0
2.5	9.5	8.5	8.5	1.0
3.0	11.0	9.5	9.5	1.0
4.0	13.0	11.0	11.0	1.0
5.5	15.0	13.0	13.0	1.0

PRONTEAU flow information and connectivity:

- **Min cold water pressure requirement:** 1.5 bar
- **Min hot water pressure requirement:** 0.75 bar
- **Recommended / Maximum (domestic) hot water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres/min):** 9.90
- **Control valve type:** 1 x M20 Ceramic disc QT, 1 x Single lever 25mm
- **Product flow characteristics:** (H&C/Boiling) dual flow
- **Hot and Cold inlets:** Flexible hose connections supplied
- **Non return valve(s):** Yes, integral to cold inlet flexi hose only

Care instructions and Warranty Summary*

- Clean the tap regularly as required, using a mild soap and damp cloth, do not use any other cleaners, regular cleaning will prevent the build-up of lime scale and dirt
- Maintain the heater according to the user guide, for example replace filter and descale when required.


- Mixertap materials and workmanship defects warranted for 5 years
- Proboil2X materials and workmanship defects warranted for 2 years
- Mixertap valves and working parts warranted for 5 years
- Surface finish warranty defects warranted for 1 year
- All o-rings, hoses & gaskets warranted for 1 year



PROBOIL.2X features:

- Controllable tank temperature range from 75°C (holiday/eco mode) to 85,90,95,96, 97, 98°C using the touch screen controls.
- 2.1 Litre capacity tank, apx. 7 minutes reboil after use
- On screen filter life / replacement indicator
- Intelligent self-diagnostic control
- No external drain connection needed for a simplified and more flexible installation
- Flow limited to 2 litres/min to limit splashing and ensure a smooth flow
- Tool free, hand tight connectors to speed up installation, maintenance and descaling
- Compact size 22x22x28cm
- 2 Year Warranty*
- WRAS approved

All temperatures quoted are measured within the tank of the boiler and actual spout exit temperature may vary dependant on local conditions and tap model.

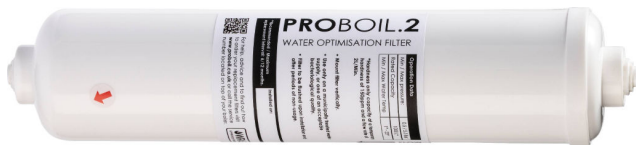

PROBOIL.2 filter features:

- Filtered 98°C drinking water, engineered specifically for hot water applications
- Included with every PROBOIL.2X system
- Recommended replacement interval 6 months
- Chlorine taste and odour reduction
- Scale reduction for better drinks and tank protection
- WRAS approved



The complete package:

Each PRONTEAU system includes:

- A stylish choice of PRONTEAU mixer taps
- PROBOIL.2X hot water boiler
- PROBOIL.2 scale control filter & assembly
- Comprehensive user and installation guide
- Nationwide professional maintenance and service support