



THE COLLECTION





WARM GREETINGS


Welcome to AEON, international market leaders in the design and production of aesthetically pleasing, ultra reliable heating solutions. We take great pride in turning the humble radiator or towel rail into a thing of unexpected beauty and unrivalled performance. Our striking collection has been created, crafted and hand-finished by experts, using only the finest quality materials available.

We now invite you to explore the collection and admire its versatility and elegance. Why compromise on style when it comes to heating? From discreet towel rails that slot seamlessly into an existing bathroom design to elaborate heated sculptures that become the undisputed focal point of the room; there is something to suit every taste and heating requirement.

Call us on 01908 271155 or visit www.aeon.uk.com

We hope you enjoy discovering what we have to offer.







Aluminium Collection

BATHROOM COLLECTION	9
TOWER COLLECTION	85
DESIGNER COLLECTION	97
ALUMINIUM COLLECTION	157
VALVES & ACCESSORIES	166
TERMS & CONDITIONS	170
BASIC HEAT LOSS CALCULATOR	171
DELIVERY	172
QUALITY	173

BATHROOM







BOLERO



BOSPORUS • 62



CAPPADOCIA • 37



CAT LADDER

• 32



CENGIZ • 34



CLIPPER ®• > 50



COFFER 90 > 70



COMBE • 40



F-BAR & T-BAR • 73



FATIH • 24



G-TYPE • 12



GALLANT

• 66



GALLIPOLI

• 68



GRANDEUR

® > 52



HONEYCOMB

••• 54



KAPTAN • 30



KARNAK • 28



LABREN 80



LINX • 82







PANACEA BATH

• 38



PETIT • 37



PODIUM

18 > 76



S-TYPE • 60



SEREN • 18



SERHAD • 20



SERIF • 16



SIESTA 14



SKUALL • 78



TEMPEST • 42



TIRENDAZ • 74



TORA

• 26



TROGON

• 22



TUBO • 44



TUDOR

• 46



WINDSOR • 48



ZENITH

• 57

TOWER







ECSTASY (B) > 92



SPEIRA B > 94



STANZA **B** > 88



TRUVA **B** > 90

DESIGNER







ARAT L **(B)** > 102



ARAT E **(3)** > 104



ARMADA **(B)** > 154



BAMBOO **@o >** 112



DALYA **(3)** > 108



ELIXIR



IMZA **(3)** > 114



KARE **B** > 106



(B) > 140



LUNAR **(B)** > 118




MADONNA **Go** > 142



MARBELLA **Bo** > 144



MARION **B** > 110



MERIDIEN **0** > 156







OTTOMAN **(B)** > 148



PANACEA **(3)** > 132



PANACEA MIRROR **(3)** > 134



PEGASUS (3) > 156



RENDE **(3)** > 138



SOFI **B** > 126



STRIA (3) > 122



SUMELA (B) > 150



SUPRA (B) > 128



TARDIS (B) > 136



TWISTER (3) > 124



VENETIAN **(3)** > 120



WAVE **(3)** > 152



ZIG ZAG **Go**> 146

SYMBOL GUIDE

- Е Electric only
- Н Hot water systems
- D Dual fuel systems
- B Radiator
- Ro Radiator & Heated Towel Rail
- 0 Heated Towel Rail
- Heated Towel Rail & Radiator **O**B















Open Heating System, Closed Heating System



Material: Stainless Steel, Mild Steel, Aluminium



Mounting Position: Vertical, Horizontal, Freestanding



Warranty (Aluminium collection)



Warranty (Stainless Steel collection)

ALUMINIUM







SESRIEM • 162



STARGATE • 160



FLUENT **®** > 164



TEXTURED GREY (TG)



GOLD (GD)



TEXTURED SILVER (TS)



BRONZE (BR)



BATHING BEAUTIES

Our bathrooms are now our sanctuaries, where we freshen up for the day ahead, or relax in heated luxury after the work is done. As such, we are paying more attention to their design than ever before. A gorgeous bathroom can sell a house and repair a fractious mood. So it needs to be beautiful, calming and above all, inviting.

Which means it needs it be warm. The right heating system can make your bathroom the closest thing to paradise on earth. Installing an AEON radiator or towel rail will ensure effective heat at the same time as classic beauty - the perfect combination for any room dedicated to pampering.

BATHROOM



ATILLA	10	CLIPPER	50
G-TYPE	12	GRANDEUR	52
SIESTA	14	HONEYCOMB	54
SERIF	16	ZENITH	57
SEREN	18	MAZE	58
SERHAD	20	S-TYPE	60
TROGON	22	BOSPORUS	62
FATIH	24	BOLERO	64
TORA	26	GALLANT	66
KARNAK	28	GALLIPOLI	68
KAPTAN	30	COFFER	70
CAT LADDER	32	F-BAR	73
CENGIZ	3 4	T-BAR	73
CAPPADOCIA	37	TIRENDAZ	74
PETIT	37	PODIUM	76
PANACEA BATH	38	SKUALL	78
COMBE	40	LABREN	80
TEMPEST	42	LINX	82
TUBO	44		
TUDOR	46		
WINDSOR	48		






ATILLA

Reassuringly solid. This contemporary, square towel rail brings warmth where it's needed. An essential element of the kitchen or bathroom, it co-ordinates beautifully with its surroundings.

Model shown: Opposite page: AT5A15-S (brushed matt)

ATILL	Α				ERIAL WOF	10 KING PRESSURE	↓ 120°C WORKING TE		O C /CLOSED SYSTEM	MOUNT POSI	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat C (BTL ΔT	I/w)	E: Electri Choice of E (Wat	lements	Finish S: Brushed Matt P: Polished
AT5A7	710	500	60	E/H/D	2	14	2056	602	300	400	S, P
AT5A10	1040	500	60	E/H/D	3	20	2937	860	400	600	S, P
AT5A15	1480	500	60	E/H/D	4	28	4112	1204	600	900	S, P

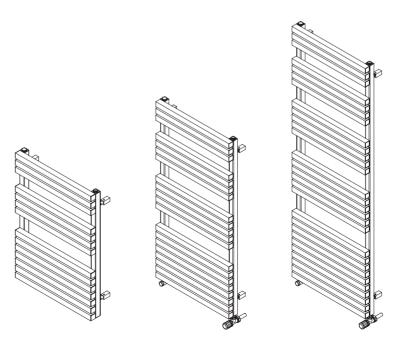






G-TYPE

Bring your bathroom to life. Heat your room in style with the unique square spiral of G-Type.

Model shown: G-Type 1249P

G-TYPE			M	SS MATERIAL W	VORKING PRESSURE	120°C WORKING TEMP.	O C OPEN/CLOSED SYSTEM	MOUNT POSITION	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options	Towel Gaps	Pipes	E: Electric only		Finish ushed Matt
Name	(11111)	(11111)	(111111)	(E/H/D)	'	Sections	Choice of Element (Watts)	_	Polished
G-Type1249	1200	490	40	E/H/D	8	17	400		S,P

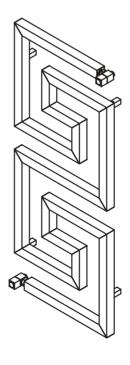






SIESTA

Everyone knows the restorative powers of a well-timed nap. So imagine snoozing whilst wrapped up in a bathrobe warmed by the smooth panels of this high-performance towel rail. Bliss.

Model shown: Opposite page: SIE520-29-S (brushed matt) Above: SIE514-21-S (brushed matt)

SIEST	Ą			S: MATE		10 RKING PRESSURE	120°C WORKING TEN		O C	WOUNT POSIT	20 YEARS TON WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes		Output	E: Electi	,	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	,	J/w) 50	Choice of (Wa	Elements tts)	S: Brushed Matt P: Polished
SIE510-17	1060	550	50	E/H/D	2	17	2469	724	300	400	S, P
SIE514-21	1370	550	50	E/H/D	3	21	3076	902	400	600	S, P
SIE520-29	1990	550	50	E/H/D	4	29	4245	1245	600	900	S, P

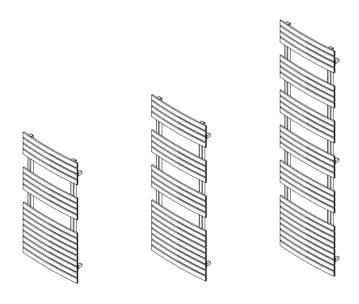






SERIF

Beautiful stainless steel combined with great design credentials. The distinctively architectural lines of this towel rail's chunky rows and dramatic columns give it an enduring, no-nonsense appeal.

Model shown: Opposite page: SRF5S12-S (brushed matt)

SERIF				9	SS	10	120°C		O C	V	20 YEARS
				MAT	TERIAL W	ORKING PRESSURE	WORKING TE	MP. OPE	N/CLOSED SYSTEM	MOUNT POSIT	ION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes			E: Electri	c only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	(BTU/w)		Choice of E (Wat		S: Brushed Matt P: Polished
SRF5S8	785	550	40	E/H/D	2	14	1289	378	300	400	S, P
SRF5S12	1200	550	40	E/H/D	3	21	1933	567	400	600	S, P
SRF5S17	1660	550	40	E/H/D	4	29	2670	783	600	900	S, P

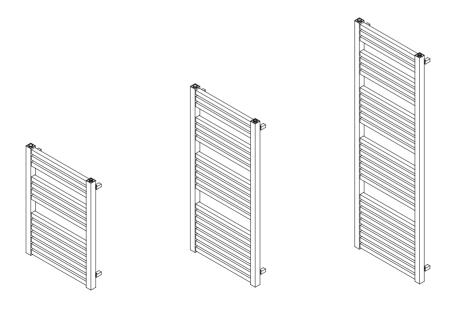







Model shown with chrome trim

Model shown with gold tri

SEREN

Cool stainless steel provides a practical, elegant place to keep towels warm. Spacious enough to accommodate even the largest family at bath-time and superbly crafted to ensure a flawless finish.

Model shown on opposite page: SE175-55-S (brushed matt)

SEREN	1				SS TERIAL WO	10 RKING PRESSURE	↓ 120°C WORKING TE		O C	WOUNT POS	20 YEARS ITION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat C (BTU ΔT	J/w)	E: Electr Choice of I (Wat	Elements	Finish S: Brushed Matt P: Polished
SE75	750	550	32	E/H/D	1	14	1599	468	300	400	S, P
SE76	750	650	32	E/H/D	1	14	1817	532	300	400	S, P
SE105	1000	550	32	E/H/D	2	18	2271	665	400	600	S, P
SE135	1300	550	32	E/H/D	2	22	2439	714	400	600	S, P
SE136	1300	650	32	E/H/D	2	22	2862	838	400	600	S, P
SE175	1750	550	32	E/H/D	3	30	3651	1069	600	900	S, P
SE176	1750	650	32	E/H/D	3	30	4266	1249	600	900	S, P
SE75C	750	550	32	E/H/D	1	14	1599	468	300	400	S
SE76C	750	650	32	E/H/D	1	14	1817	532	300	400	S
SE105C	1000	550	32	E/H/D	2	18	2271	665	400	600	S
SE135C	1300	550	32	E/H/D	2	22	2439	714	400	600	S
SE136C	1300	650	32	E/H/D	2	22	2862	838	400	600	S
SE175C	1750	550	32	E/H/D	3	30	3651	1069	600	900	S
SE176C	1750	650	32	E/H/D	3	30	4266	1249	600	900	S
SE75G	750	550	32	E/H/D	1	14	1599	468	300	400	S
SE76G	750	650	32	E/H/D	1	14	1817	532	300	400	S
SE105G	1000	550	32	E/H/D	2	18	2271	665	400	600	S
SE135G	1300	550	32	E/H/D	2	22	2439	714	400	600	S
SE136G	1300	650	32	E/H/D	2	22	2862	838	400	600	S
SE175G	1750	550	32	E/H/D	3	30	3651	1069	600	900	S
SE176G	1750	650	32	E/H/D	3	30	4266	1249	600	900	S





Model shown with gold trim


SERHAD

Reliable and bold. This chic design brings the humble towel rail bang up to date with flair and finesse. Don't be fooled by its simplicity. This is engineering brilliance.

Model shown on opposite page: SRD150-50-S (brushed chrome finish)

SERHA	ERHAD			S: MATE		10 RKING PRESSURE	120°C WORKING TE		O C /CLOSED SYSTEM	MOUNT POS	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU	Output J/w) 50	E: Electron Choice of (Wa	Elements	Finish S: Brushed Matt P: Polished
SRD75	750	580	40	E/H/D	1	14	1592	466	300	400	S, P
SRDE76	750	680	40	E/H/D	1	14	1718	503	300	400	S, P
SRD105	1000	580	40	E/H/D	2	18	2036	596	400	600	S, P
SRD106	1000	680	40	E/H/D	2	18	2145	628	400	600	S, P
SRD155	1500	580	40	E/H/D	3	28	3299	966	600	900	S, P
SRD156	1500	680	40	E/H/D	3	28	3392	993	600	900	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

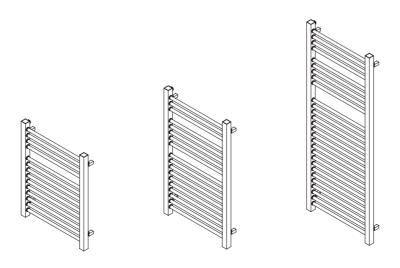

Call us on 01908 271155 or visit www.aeon.uk.com

Product specification is subject to change without prior notification.






TROGON

Keeping interiors warm and stylish, Trogon is a simple yet elegant compliment to any room. The wonderful handmade touch ensures the highest quality finish in a brushed or polished clean look.

Model shown: TRI450P

TROG	ON			S	S	8	↓ 120°C		O C	V	20 YEARS
				MATE	RIAL WOF	RKING PRESSURE	WORKING TEI	MP. OPEN/C	CLOSED SYSTEM	MOUNT POSIT	TION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat	Output	E: Elect	ric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	,	U/w) 「50		Elements itts)	S: Brushed Matt P: Polished
TR0550	460	500	55	E/H/D	1	4	638	187	150	300	S, P
TR0850	775	500	55	E/H/D	2	6	995	292	300	400	S, P
TR1050	1090	500	55	E/H/D	3	8	1351	396	300	400	S, P
TR1450	1405	500	55	E/H/D	4	10	1708	501	400	600	S, P
TR1750	1720	500	55	E/H/D	5	12	2065	605	600	900	S, P

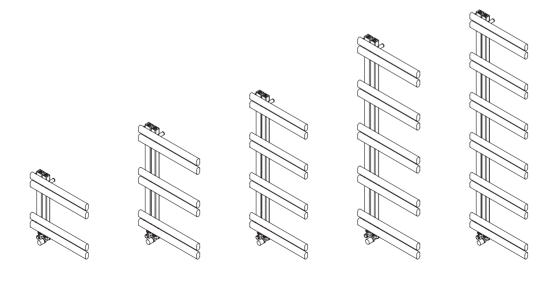

Call us on 01908 271155 or visit www.aeon.uk.com










FATIH


The shape of things to come. These sharp rectangular frames shout precision engineering, while the modern, stylish design provides more than enough space for your towels.

■ Model shown on opposite page: FA5F17-S (brushed matt)

FATIH				9	SS	10	120°C		O C	V	20 YEARS
				MAT	TERIAL W	ORKING PRESSURE	WORKING TE	MP. OPEN	/CLOSED SYSTEM	MOUNT POSI	TION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes			E: Electr	ic only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	or (BTU/w)		Choice of E (Wat		S: Brushed Matt P: Polished
FA5F8	830	500	90	E/H/D	3	14	1527	447	300	400	S, P
FA5F11	1110	500	90	E/H/D	4	18	2012	589	400	600	S, P
FA5F17	1670	500	90	E/H/D	6	26	3019	884	600	900	S, P

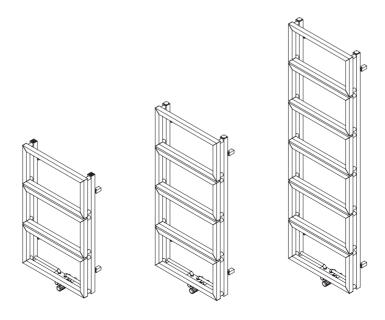



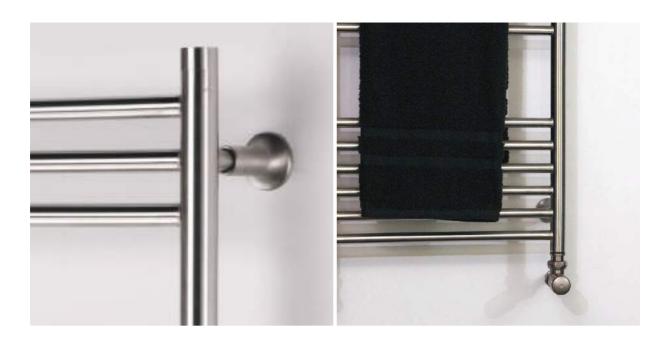


TORA

Timeless, classic beauty in the simple stainless steel rows and columns of this generously proportioned towel rail. Guaranteed to make any room a better place to be.

Model shown on opposite page: TOR415-4-S (brushed matt)

TORA				S MATE		10 KING PRESSURE	120°C WORKING TE		O C	MOUNT POS	20 YEARS
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU	Output J/w) 50	E: Electr Choice of (Wa	Elements	Finish S: Brushed Matt P: Polished
TOR407-2	718	400	32	E/H/D	2	13	1001	293	150	300	S, P
TOR410-3	1044	400	32	E/H/D	3	19	1462	428	300	400	S, P
TOR415-4	1550	400	32	E/H/D	4	25	1926	564	400	600	S, P
TOR507-2	718	500	32	E/H/D	2	13	1250	366	150	300	S, P
TOR510-3	1044	500	32	E/H/D	3	19	1827	535	300	400	S, P
TOR515-4	1550	500	32	E/H/D	4	25	2408	705	400	600	S, P

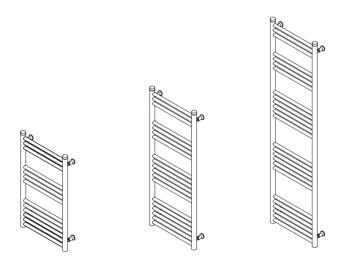






KARNAK

Post-bathing paradise. Imagine a place where all your towels can gently warm while you relax in the bath. This heated rail provides lots of space – even for the longest of towels.

Model shown on opposite page: 5K17-S (brushed matt)

KARN	IAK				SS Erial W	ORKING PRESSURE	120°C WORKING TE		O C	MOUNT POS	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTI	Output J/w) 50	E: Electi Choice of (Wa	Elements	Finish S: Brushed Matt P: Polished
3K10	1000	310	30	E/H/D	11	12	519	152	150	300	S, P
3K14	1440	310	30	E/H/D	16	17	735	215	300	400	S, P
4K5	480	420	30	E/H/D	5	6	351	103	90	150	S, P
4K14	1440	420	30	E/H/D	16	17	995	291	300	400	S, P
5K10	1000	500	30	E/H/D	11	12	836	245	400	600	S, P
5K14	1440	500	30	E/H/D	16	17	1185	347	30	0	S, P
5K17	1700	500	30	E/H/D	19	20	1468	430	400	600	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

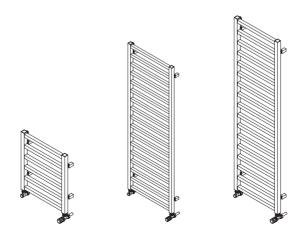

Call us on 01908 271155 or visit www.aeon.uk.com

 $\label{product product prior notification} Product\ specification\ is\ subject\ to\ change\ without\ prior\ notification.$






KAPTAN

It's a radiator, but not as we know it. This innovative set of horizontal bars displays true class with its satin finish and unrivalled performance. A perfect example of what we do best.

Model shown on opposite page: KA24-S (brushed matt)

KAPT	AN				SS TERIAL V	VORKING PRESSURE	↓ 120°C WORKING TE		O C	MOUNT POSITI	20 YEARS ON WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat Output (BTU/w) ΔT 50		E: Electr	ic only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections			Choice of Elements (Watts)		S: Brushed Matt P: Polished
KA18	1040	500	40	E/H/D	5	18	2388	699	300	400	S, P
KA24	1400	500	40	E/H/D	7	24	3183	932	400	600	S, P
KA30	1760	500	40	E/H/D	9	30	3979	1165	600	900	S, P

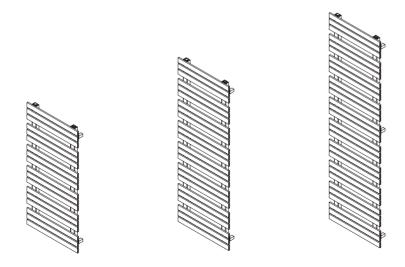






CAT LADDER

Cat-like grace. This purr-fectly designed towel rail climbs the wall with effortless style, while radiating enough heat to keep the fussiest feline warm and content.

Model shown on opposite page and above right: CLA510-10P (polished)

CAT L	ER		S	S	10	120°C		O C	V	20 YEARS	
				MATE	MATERIAL WO		WORKING TEMP. OPEN		I/CLOSED SYSTEM	MOUNT POSI	TION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat Output (BTU/w) ΔT 50		E: Elect	ric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections			Choice of Elements (Watts)		S: Brushed Matt P: Polished
CLA508-8	800	530	30	E/H/D	3	8	946	277	300	400	S, P
CLA510-10	1030	530	30	E/H/D	4	10	1185	347	400	600	S, P
CLA513-12	1260	530	30	E/H/D	5	12	1421	416	400	600	S, P
CLA515-14	1490	530	30	E/H/D	6	14	1657	485	600	900	S, P
CLA517-16	1720	530	30	E/H/D	7	16	1892	554	900	900	S, P

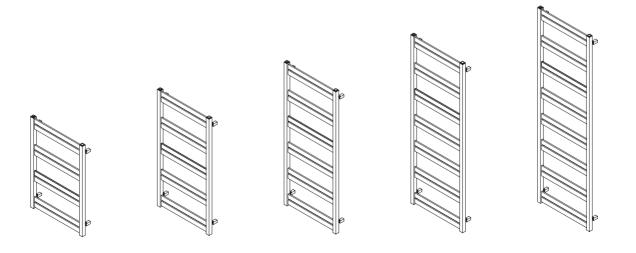






CENGIZ

Strong. Dependable. The masculine lines of this powerful design will make your bathroom stand out from the crowd at the same time as keeping away the chill.

■ Model shown on opposite page: CEN5C11-S (brushed matt)

CENG	ΙZ			9	SS	10	120°C		O C	V	20 YEARS
				MAT	TERIAL W	ORKING PRESSURE	WORKING TE	EMP. OPEN	I/CLOSED SYSTEM	MOUNT POSI	TION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat (Output	E: Electr	ic only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	,	(BTU/w) ΔT 50		Elements tts)	S: Brushed Matt P: Polished
CEN5C7	690	500	60	E/H/D	2	9	876	257	300	400	S, P
CEN5C11	1100	500	60	E/H/D	3	14	1323	388	400	600	S, P
CEN5C17	1650	500	60	E/H/D	4	21	1985	582	900	900	S, P

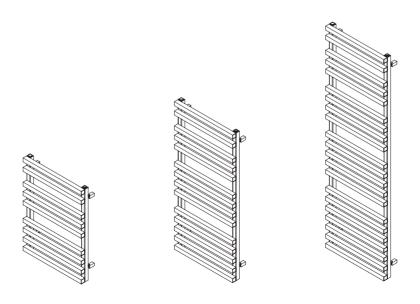

CRAFTSMANSHIP: DEDICATION AND EXPERTISE

We are pioneers and international market leaders in design and manufacturing of stainless steel designer radiators. All our products are hand-made in the workshop by our elite team of 68 skilled craftsmen, welders, polishers, finishers and carpenters. All take great pride in their job.

Our philosophy is a fanatical adherence to quality and attention to detail. Radiators don't all have to look alike. We deliver something truly special and unique.





CAPPADOCIA

Focus on fun. Home heating brought to a new level; this stylish towel rail revels in its confident curves and slender proportions, complementing the contours of rounded basins and baths.

Model shown: CAP905-S (brushed matt)

CAPPA	ADO(CIA			TERIAL W	ORKING PRESSURE	120°C WORKING TE		O C PEN/CLOSED SYSTEM	WOUNT POSI	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU	Output J/w) 50	E: Electric Choice of El (Watt	ements	Finish S: Brushed Matt P: Polished
CAP905	900	500	130	Н	3	12	900	264	H: Central Hea	nting Only	S, P

PETIT


Small is beautiful. This attractively proportioned towel rail can grace the most bijoux of bathrooms and comes with an impressive heat output.

Model shown: PET46-S (brushed matt)



PETIT					ERIAL WO	10 RKING PRESSURE	VORKING TE		O C	MOUNT POSIT	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU	Output J/w) 50	E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished
PETS46	420	600	50	E/H/D	3	8	716	210	90	150	S, P



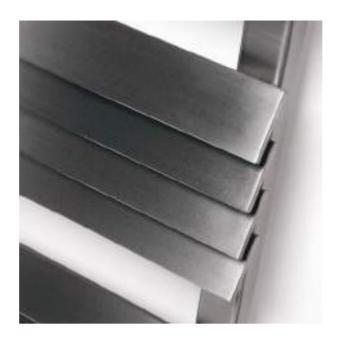

PANACEA BATH

The perfect bathroom accessory. This chic, louvre-style towel rail will keep the room toasty while you bathe and give you something lovely to look at while you are getting dressed afterwards.

Model shown on opposite page: PANB1208-S (brushed matt)

PANACEA BATH			SS	5	8	120°C		O C	V	20 YEARS	
				MATER	RIAL WOF	RKING PRESSURE	WORKING TE	EMP. OPEN	/CLOSED SYSTEM	MOUNT PO	SITION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat (Output	E: Elect	ric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections		J/w) 50	Choice of (Wa		S: Brushed Matt P: Polished
PANB704	660	400	75	E/H/D	1	11	1104	323	30	0	S, P
PANB1004	985	400	75	E/H/D	2	16	1596	467	30	0	S, P
PANB1204	1175	400	75	E/H/D	3	18	1813	531	40	00	S, P
PANB1504	1500	400	75	E/H/D	4	22	2229	653	40	00	S, P
PANB1704	1680	400	75	E/H/D	4	26	2594	759	40	00	S, P
PANB705	660	500	75	E/H/D	1	11	1298	380	40	00	S, P
PANB1005	985	500	75	E/H/D	2	16	1878	550	40	00	S, P
PANB1205	1175	500	75	E/H/D	3	18	2131	624	40	00	S, P
PANB1505	1500	500	75	E/H/D	4	22	2617	766	60	00	S, P
PANB1705	1680	500	75	E/H/D	4	26	3053	894	60	00	S, P
PANB706	660	600	75	E/H/D	1	11	1493	437	400	600	S, P
PANB1006	985	600	75	E/H/D	2	16	2161	633	400	600	S, P
PANB1206	1175	600	75	E/H/D	3	18	2449	717	60	00	S, P
PANB1506	1500	600	75	E/H/D	4	22	3006	880	600	900	S, P
PANB1706	1680	600	75	E/H/D	4	26	3512	1028	600	900	S, P
PANB708	660	800	75	E/H/D	1	11	1881	551	40	00	S, P
PANB1008	985	800	75	E/H/D	2	16	2726	798	40	0	S, P
PANB1208	1175	800	75	E/H/D	3	18	3085	903	60	00	S, P
PANB1508	1500	800	75	E/H/D	4	22	3783	1108	600	900	S, P
PANB1708	1680	800	75	E/H/D	4	26	4431	1297	600	900	S, P






COMBE

Asymmetry at its best. This unusual design can be hung right or left-handed. It comes in three heights with a choice of brushed or polished steel finishes. The decision is yours.

■ Model shown on opposite page: COM15-L-S (brushed matt)

COME	3E				SS (10 120°C) MATERIAL WORKING PRESSURE WORKING TEMP.				O C /CLOSED SYSTEM	MOUNT POS	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTI	Output J/w) 50	E: Electronic Choice of (Wa	Elements	Finish S: Brushed Matt P: Polished
COM10-R	920	500	80	E/H/D	2	12	3197	936	400	600	S, P
COM10-L	920	500	80	E/H/D	2	12	3197	936	400	600	S, P
COM15-R	1460	500	80	E/H/D	3	20	5328	1560	600	900	S, P
COM15-L	1460	500	80	E/H/D	3	20	5328	1560	600	900	S, P
COM18-R	1710	500	80	E/H/D	4	25	6660	1950	600	900	S, P
COM18-L	1710	500	80	E/H/D	4	25	6660	1950	600	900	S, P

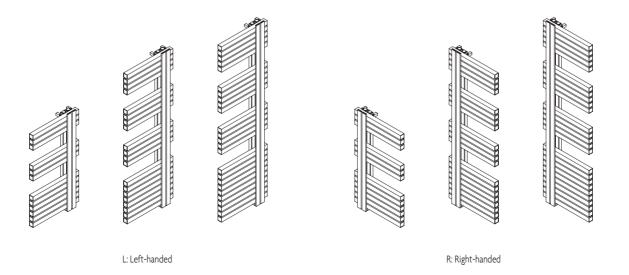









TEMPEST


Bringing order to the chaos. Reassuringly strong, smooth steel bars in triplicate add serenity to any bathroom. Discover for yourself the compelling allure of the calm before the storm.

Model shown: TMP105-S (brushed matt)

TEMP	EST				SS 120°C			O C V		20 YEARS	
				MAT	TERIAL W	ORKING PRESSURE	WORKING TE	EMP. OPE	N/CLOSED SYSTEM	MOUNT POSIT	ION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat (Output	E: Electr	ic only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	,	(BTU/w) ΔT 50		lements ts)	S: Brushed Matt P: Polished
TMP805	780	500	60	E/H/D	3	12	1441	422	150	300	S, P
TMP105	1000	500	60	E/H/D	4	15	1810	530	300	400	S, P
TMP125	1220	500	60	E/H/D	5	18	2183	639	400	600	S, P










TUBO

Quirky isn't the word. The fun combination of wide tubular rows connected to two slim columns is sure to please, and is versatile enough to suit any style of bathroom.

Model shown on opposite page: TUB508-S (brushed matt) Above Left: TUB506-P (polished)

TUBO					SS TERIAL W	ORKING PRESSURE	120°C WORKING TO		O C	MOUNT POSITIO	20 YEARS WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes		Output	E: Electri	,	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	(BTU/w) ΔT 50		Choice of Elements (Watts)		S: Brushed Matt P: Polished
TUB506	705	500	60	E/H/D	2	12	1496	438	300)	S, P
TUB508	990	500	60	E/H/D	3	16	1994	584	400)	S, P
TUB510	1275	500	60	E/H/D	4	20	2493	730	400)	S, P
TUB512	1560	500	60	E/H/D	5	24	2992	876	2x3 ²	10	S, P

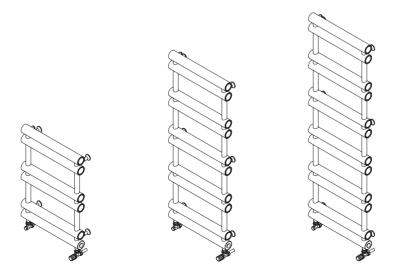






TUDOR

Quality fit for a King. This towel rail looks simple, but it has been carefully designed for maximum heating performance and capacity. Just don't lose your head deciding where to put it.

Model shown on opposite page: TDR412-P (polished)

TUDO	TUDOR				SS WO	10 ORKING PRESSURE			O C V V/CLOSED SYSTEM MOUNT POS		20 YEARS ITION WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat ()utput	put E: Electric only		Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	(BTU ΔT	J/w) 50	N) Choice of Elements		S: Brushed Matt P: Polished
TDR408	800	420	100	E/H/D	2	3	642	188	40	0	S, P
TDR412	1200	420	100	E/H/D	3	4	857	251	60	0	S, P
TDR508	800	520	100	E/H/D	2	3	693	203	40	0	S, P
TDR512	1200	520	100	E/H/D	3	4	926	271	400	600	S, P
TDR608	800	620	100	E/H/D	2	3	748	219	400	600	S, P
TDR612	1200	620	100	E/H/D	3	4	1001	293	400	600	S, P












WINDSOR


It's all about the detail in this exquisitely finished towel rail. And you don't have to be royalty to appreciate the warm, fluffy towels it produces at your merest command.

Model shown on opposite page: WIN5W11-S (brushed matt) Above Left: WIN5W16-S (brushed matt)

WIND:	SOR			SS MATERIAL WO		VORKING PRESSURE WORKING TEMP.			O C	MOUNT POSI	20 YEARS	
				IVIAIE	nial wor	INING PRESSURE	WURKING II	IWIP. UPE	M/OLOSED STSTEM	MOUNT POSI	IIUN WARRANTT	
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat (Output	E: Electr	ic only	Finish	
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	(BTU/w) ΔT 50		Choice of E		S: Brushed Matt P: Polished	
WIN5W8	798	493	50	E/H/D	2	14	1288	377	300	400	S, P	
WIN5W11	1150	493	50	E/H/D	3	20	1837	538	40	0	S, P	
WIN5W16	1612	493	50	E/H/D	4	31	2705	792	400	600	S, P	
WINEC (pair)											S, P	

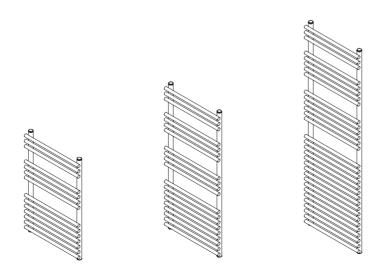



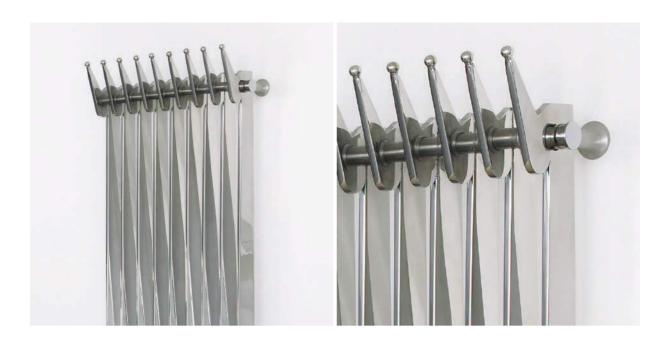


CLIPPER

Cutting-edge drama inspired by the barber's tool. Unique Twister technology produces alternating polished and brushed steel surfaces, while tapered ends double up as coat or towel hooks.

R1 Model shown on opposite page: CL1509

CLIPP	ER				SS (10) 120°C MATERIAL WORKING PRESSURE WORKING TEMP. 0			O C V PEN/CLOSED SYSTEM MOUNT POS		20 YEARS TION WARRANTY	
Product Name	me (mm) (mm) (mm) 0		Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU/w)		E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished	
CL1505	1500	220	130	Н	5	5	1728	506	H: Central He	eating Only	Bi-Finish
CL1507	1500	310	130	E/H/D	7	7	2418	708	340	400	Bi-Finish
CL1509	1500	400	130	E/H/D	9	9	3118	913	340	400	Bi-Finish

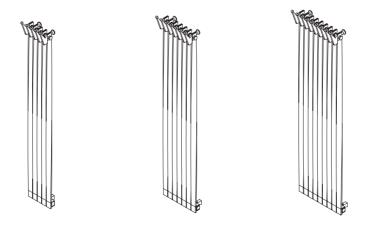






GRANDEUR

Perfect for an entrance hall or bathroom. Scrolled arms evoke the timeless beauty of the Renaissance period, resulting in a modern design with a classic twist.

B1 Model shown on opposite page: GRA146-S (brushed matt)

GRAN	GRANDEUR			SS		10 G PRESSURE	WORKING TEMP.	O C OPEN/CLOSED SYSTEM MOUN	FS 20 YEARS IT POSITION WARRANTY
Product	Height	3 3 1		Fuel			Output	E: Electric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	(BTU/w) ΔT 50		Choice of Elements (Watts)	S: Brushed Matt P: Polished
GRA106	660	965	210	Н	26	4317	1264	H: Central Heating Only	S, P
GRA126	660	1215	210	Н	26	4977	1457	H: Central Heating Only	S, P
GRA146	660	1415	210	Н	26	5506	1612	H: Central Heating Only	S, P
GRA176	660	1715	210	Н	26	6302 1845		H: Central Heating Only	S, P
GRA206	660	2030	210	Н	26	7135	2089	H: Central Heating Only	S, P










HONEYCOMB


Create a buzz. This hexagonal design evokes a cheerful, fun-loving mood, bringing the wonderful world of nature indoors. Add customised glass or stone inserts for a truly organic feel.


TR Model shown on opposite page: HON9-S (brushed matt)

HONE	HONEYCOMB					ORKING PRESSURE	↓ 120°C WORKING TE		O C V VCLOSED SYSTEM MOUNT POS		20 YEARS TION WARRANTY
Product			Fuel	Towel	Pipes	Heat Output		E: Electric only		Finish	
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	(BTU/w) ΔT 50		Choice of Elements (Watts)		S: Brushed Matt P: Polished
HON3	580	550	40	Н	3	18	666	195	H: Central He	ating Only	S, P
HON5	840	785	40	Н	5	30	1110	325	H: Central He	ating Only	S, P
HON7	1120	785	40	Н	7	42	1554	455	H: Central He	ating Only	S, P
HON9	1400	785	40	Н	9	63	1998	585	H: Central He	ating Only	S, P







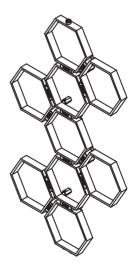

STAINLESS STEEL: FLAWLESS FINISH

Why choose stainless steel for domestic heating systems? Because its properties are ideal for creating long-lasting, highly effective, beautiful radiators and heated towel rails. Why choose AEON's stainless steel? Because we make sure we use top quality grades that ensure the longest life possible for our range of products.

Invented in Sheffield, England in the early 20th century, stainless steel is non-corrosive, easily maintained, hygienic and versatile. It is strong and durable, thus resisting peeling, flaking and discolouration. The inevitable minor scratches, dirt and marks that come with day-to-day living are easily eliminated with the AEON Care Pack. What's more, stainless steel is always fashionable, with its contemporary, sleek appearance and sensuous feel.






ZENITH

This tactile towel rail may give you ideas above your station as it gently warms your towels to keep out the cold.
Simply designed; superbly engineered.

Model shown: ZEN105-S (brushed matt)

ZENITH					SS MATERIAL WOR		IG PRESSURE WORKING TEMP.		O C /CLOSED SYSTEM	MOUNT POS	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU	Output J/w) 50	E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished
ZEN64	560	380	40	E/H/D	2	9	502	147	90	150	S, P
ZEN104	1000	380	40	E/H/D	4	15	837	245	150	300	S, P
ZEN124	1200	380	40	E/H/D	4	18	1004	294	300	400	S, P
ZEN154	1500	380	40	E/H/D	5	21	1171	343	300	400	S, P
ZEN65	560	480	40	E/H/D	2	9	611	179	150	300	S, P
ZEN105	1000	480	40	E/H/D	4	15	1018	298	300	400	S, P
ZEN125	1200	480	40	E/H/D	4	18	1223	358	300	400	S, P
ZEN155	1500	480	40	E/H/D	5	21	1424	417	400	600	S, P

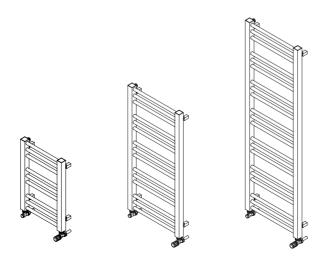









MAZE

Maze takes the current trend for square profile stainless steel heating bars to a new dimension with its abstract, geometric pattern that complements the clean lines of contemporary interiors.

■ Model shown on opposite page: MAZ1855-S (brushed matt)


MAZE				SS MATERIAL	WORKING PRESSURE	120°C WORKING TEMP.	OPEN/CLOSED SYSTEM	V Q 20 YEARS MOUNT POSITION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)			w)	E: Electric only Choice of Elements (Watts)	Finish S: Brushed Matt P: Polished
MAZ1250	1150	500	80	Н	1069	313	H: Central Heating Only	S, P
MAZ1855	1800	540	80	Н	2114	619	H: Central Heating Only	S, P









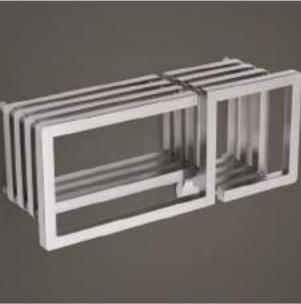


S-TYPE

More than meets the eye. Not only can this fabulous design hang vertically or horizontally to heat your bathroom, it is also a highly practical towel rail and airing shelf.

Model shown: STY100-S (brushed matt)

S-TYPE			SS MATERIAL			WORKING TEMP. OPEN/CLOSED		C V ED SYSTEM MOUNT POSITION		20 YEARS WARRANTY	
Product Name			Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTI	Output U/w) 50	Choice	of Elements Watts)	Finish S: Brushed Matt P: Polished	
STY100	400	1000	250	E/H	4	28	3093	907		600	S, P
STY130	500	1350	250	E/H/D	4	28	3819	1120		900	S, P










BOSPORUS


A new take on ladder-style heating. Airing shelf offers maximum convenience, while the bold design ensures a strong visual impact. Best of both worlds.

Models shown on opposite page: and above right: BOS125-S (brushed matt) Above Left: BOSZ125-S (brushed matt)

BOSPORUS					MATERIAL WORKING PRESSURE WORKING TEMP. O			O C V OPEN/CLOSED SYSTEM MOUNT POS		20 YEARS ITION WARRANTY	
Product Name	e (mm) (mm) (mm)		Fuel Options (E/H/D)	ptions Gaps		Pipes Heat Output or (BTU/w) Sections ΔT 50		t E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished	
BOS125	1200	530	220	E/H/D	4	15	2148	630	400	600	S, P
BOSZ125	1200	530	220	E/H/D	4	24	4338	1272	600	900	S, P





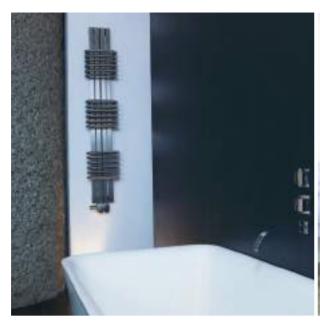




BOLERO

Reminiscent of its passionate Latino namesake. Contemporary design blends bold, angular columns with curvaceous tubular bars. Perfect marriage of performance and beauty.

Model shown on opposite page: BOL2-S (brushed matt) Above: BOL3-S (brushed matt)

BOLE	RO				ERIAL W	ORKING PRESSURE	WORKING TEMP. OPE		O C	MOUNT POS	20 YEARS WARRANTY
Product Name	ame (mm) (mm) (mm) 0		Fuel Options (E/H/D)	ions Gaps or		Heat Output (BTU/w) s ΔT 50		E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished	
BOL1	630	300	150	E/H/D	1	10	1794	526	300	400	S, P
BOL2	1060	300	150	E/H/D	2	16	3311	971	400	600	S, P
BOL3	1500	300	150	E/H/D	3	22	4839	1419	600	900	S, P








GALLANT

Boutique chic. This elegant design offers practicality without sacrificing style. Add up to three towel rungs to ensure it meets your requirements.

Model shown on opposite page: GA807-S (brushed matt)

GALL	ANT				SS TERIAL V	VORKING PRESSURE	WORKING TE		O C CLOSED SYSTEM	MOUNT POSIT	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps			J/w)	E: Electr Choice of I (Wai	Elements	Finish S: Brushed Matt P: Polished
GA807	750	780	150	E/H/D	3	17	2169	635	400	600	S, P









GALLIPOLI

Timeless beauty meets Turkish bathing in this practical, high performance radiator with a choice of one, two or three integrated towel bars. Functional and fabulous.

Models shown on opposite page: GALL-3 Above left: GALL-2 Above right: GALL-1

GALL	IPOL	l			SS	10	120°C		O C	V	20 YEARS	
				MAT	TERIAL W	ORKING PRESSURE	WORKING TE	MP. OPEN	/CLOSED SYSTEM	MOUNT POS	ITION WARRANTY	
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat (Heat Output		ic only	Finish	
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	(BTU/w) ΔT 50		Choice of Elem (Watts)		S: Brushed Matt P: Polished	
GALL-1	914	490	170	E/H/D	1	10	2172	636	400	600	S, P	
GALL-2	1204	490	170	E/H/D	2	11	2606	763	600	900	S, P	
GALL-3	1494	490	170	E/H/D	3	12	3040	890	600	900	S, P	














COFFER


Stunning geometric form, reminiscent of childhood mazes. Hang the polished geometric shapes vertically or horizontally for a display that heats the room and excites the eye.

Ro Model shown on opposite page: COF490-P (polished)

COFF	ER			SS MATERIAL		10 PRESSURE	120°C WORKING TEMP.	OPEN/CLOSE	C SYSTEM	V H MOUNT POSITION	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTI	Output J/w) 50	Choice of	of Elements Vatts)	Finish S: Brushed Matt P: Polished
COF490	890	440	70	E/H/D	1	32	2965	868	400	600	S, P
COF511	1090	540	70	E/H/D	1	40	4058	1188	400	600	S, P

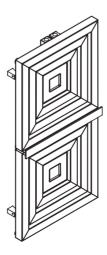





Far more than simple heating devices, the AEON range of luxury radiators and heated towel rails has been designed and developed using state-of-the-art production techniques that combine beauty with heating efficiency and durability. For example, all our products are welded using a Tungsten Inert Gas (TIG) welding technique, which results in joints that are equally as strong as the main body of the radiator.

Another technique we are particularly proud of allows us to create stunning bars that have been twisted uniformly, creating a line of alternating brushed and polished steel surfaces. A special twisting machine allows us to manipulate stainless steel poles of almost any length and size to create a vertical or horizontal design with up to three twists per line. What a head turner.



F-BAR

This towel rail provides a simple way to keep towels warm while you're in the bath. Plenty of room to hang them; plenty of style to frame them beautifully.

Model shown: FBA404S

F-BAR				S		20 DRKING PRESSURE	120℃ WORKING TE		EN/CLOSED SYSTEM	MOUNT POS	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU	Output J/w) 50	E: Electr Choice of I (War	Elements	Finish S: Brushed Matt P: Polished
FBA404	440	420	250	E/H/D	3	5	891	261	90	150	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

T-BAR


Designed with smaller spaces in mind, this functional towel rail with multiple rungs incorporates plenty of space to warm towels, while the design is pleasingly different.

Model shown: TBA404P



T-BAR					SS WOI	10 RKING PRESSURE	120°C WORKING TEN		O C	WOUNT POSIT	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat 0 (BTU ΔΤ :	/w)	E: Electric Choice of El (Watt	ements	Finish S: Brushed Matt P: Polished
TBA404	440	460	250	Н	3	5	891	261	H: Central Hea	ating Only	S, P



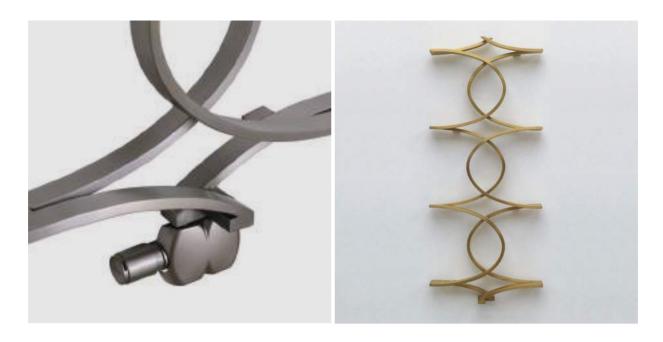


TIRENDAZ


This elegant 'Turkish delight' is named after the power and accuracy of historical Ottoman archers and inspired by retro designs that show off the symmetry of the perfect curves and relaxing vibe.

Model shown on opposite page: TRZ613-10-S (brushed matt) Above right: TRZ613-10-G (satin gold)

TIREN	IDAZ				SS FERIAL WO	10 DRKING PRESSURE	J 120°C WORKING TI		O C //CLOSED SYSTEM	MOUNT POSIT	20 YEARS ON WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BT	Output J/w) 50	E: Electri Choice of E (Wat	lements	Finish S: Brushed Matt G: Satin Gold
TRZ609-8	930	570	115	Н	4	8	1134	332	H: Central He	ating Only	S, G
TRZ613-10	1315	570	115	Н	6	10	1506	441	H: Central He	ating Only	S, G
TRZ617-12	1700	570	115	Н	8	12	1899	556	H: Central He	ating Only	S, G

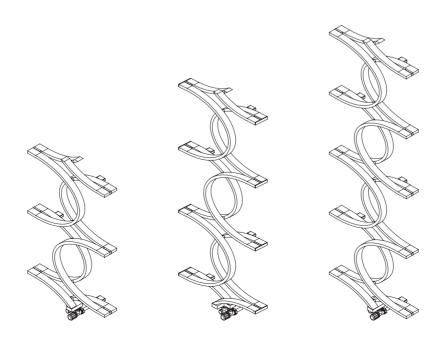



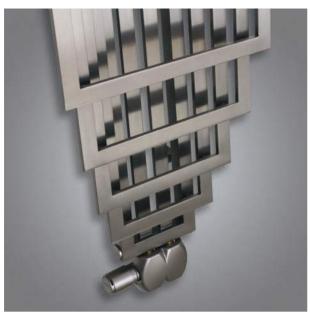




PODIUM

A design worthy of winning gold, silver and bronze. This unusual, yet highly pleasing combination of squares and vertical lines really draws the eye and soothes the soul.

TR Model shown on opposite page: POD412-S (brushed matt)

PODII	UM				SS TERIAL W	VORKING PRESSURE	120°C WORKING TEI		O C //CLOSED SYSTEM	MOUNT POSI	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat 0 (BTU ΔΤ	/w)	E: Electr	Elements	Finish S: Brushed Matt P: Polished
POD412	1200	400	130	E/H/D	8	22	2288	670	300	400	S, P

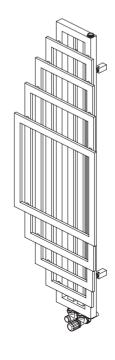






SKUALL

Watch as the light dances across the crossing curves of this stunning design. The perfect way to bring any bathroom to life and add a touch of class.

■ Model shown on opposite page: SKL123-20-S (brushed matt)

SKUA	LL				SS TERIAL WO	10 DRKING PRESSURE	J 120°C WORKING TI		O C /CLOSED SYSTEM	MOUNT POS	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BT	Output U/w) 50	E: Electr Choice of (Wa	Elements	Finish S: Brushed Matt P: Polished
SKL083-13	770	370	260	E/H/D	12	13	1602	469	300	400	S, P
SKL123-20	1190	370	260	E/H/D	19	20	2449	717	400	600	S, P
SKL163-27	1610	370	260	E/H/D	26	27	3337	977	600	900	S, P

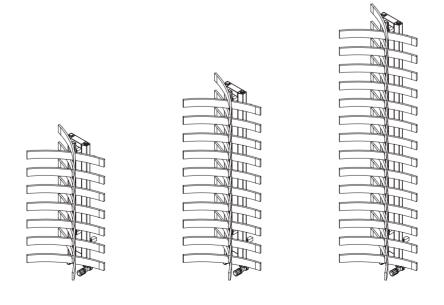




LABREN

Ultra modern, ultra chic. This symmetrical design is very easy on the eye. Its satin finish shimmers in the light while the radiator gives off its comforting heat.

® Model shown on opposite page: LA108-S (brushed matt)

LABR	EN			SS MATERIA		10 PRESSURE	WORKING TEMP.	O C OPEN/CLOSED SYS	rem mount	V 20 YEAR POSITION WARRANT
Product	Height	Length	Depth	Fuel	Pipes		at Output	E: Elect	ric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections		BTU/w) ΔT 50		Elements tts)	S: Brushed Matt P: Polished
LA108	975	800	70	E/H/D	18	4310	1262	600	900	S, P








LINX

Bold and beautiful. This radiator demands your attention and keeps any room cosy and warm. It's all about the detail and this has been designed to perfection.

Model shown on opposite page and above: LNX107-S (brushed matt)

LINX					SS TERIAL WO	10 PRKING PRESSURE	↓ 120°C Working Te		O C EN/CLOSED SYSTEM	WOUNT POSI	20 YEARS TION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTI	Output J/w) 50	E: Electr Choice of I (Wat	Elements	Finish S: Brushed Matt P: Polished
LNX807	780	700	60	E/H/D	3	12	1441	422	300	400	S, P
LNX107	1000	700	60	E/H/D	4	15	1810	530	300	400	S, P
LNX127	1220	700	60	E/H/D	5	18	2183	639	400	600	S, P

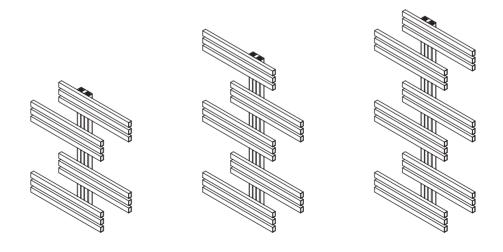

HOME IS WHERE THE HEARTH IS: HUMANITY'S LONG HISTORY WITH HEAT

As our homes have developed, so have our methods of creating and controlling heat. We don't tend to use fire directly for cooking food or heating houses any more, yet nostalgia keeps the inglenook or open fireplace close to our hearts. Which just goes to show that it's not just about finding an effective heat source. It must look the part. That's where AEON's range of attractive radiators comes in.



TOWER



ALIEN 86 STANZA 88 TRUVA 90 ECSTASY 92 SPEIRA 94







ALIEN

Other-worldly appeal. This bold radiator stands tall with its narrow square columns and smooth satin finish. They'll be talking about this innovative design across the galaxy and beyond.

R Model shown on opposite page: AL20-S (brushed matt)

ALIEN	1			S		6 NG PRESSURE	120°C WORKING TEMP.	O C OPEN/CLOSED SYSTEM	FS MOUNT POSITION	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	(B	t Output TU/w) \T 50	E: Electric only Choice of Elements (Watts)	S: Brus	nish hed Matt olished
AL15	1510	250	250	Н	16	8202	2401	H: Central Heating Only		S, P
AL18	1810	250	250	Н	16	9430	2761	H: Central Heating Only		S, P
AL20	2010	250	250	Н	16	10917	3196	H: Central Heating Only		S, P



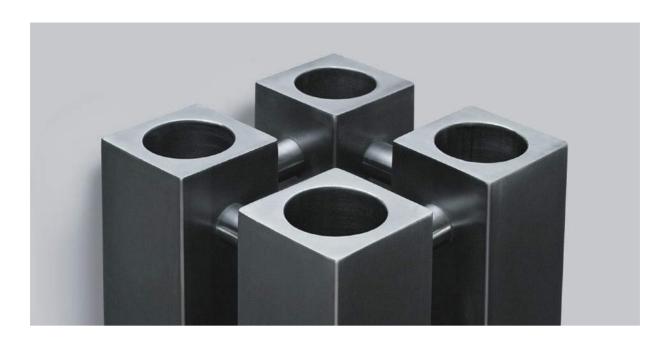


STANZA

Hitting the right notes. This trendy design is perfect for lofty spaces with its striking appearance and powerful heat delivery. The perfect way to keep warm without losing your cool.

® Model shown on opposite page: STA15-S (brushed matt)

STAN	ZA			SS MATERI		6 PRESSURE	VORKING TEMP.	O C OPEN/CLOSED SYS	TEM MOUI	FS NT POSITION	20 YEARS WARRANTY
Product	Height	Length	Depth	Fuel	Pipes		t Output	E: Electr	ic only		Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	,	BTU/w) ΔT 50	Choice of I (Wa			rushed Matt : Polished
STA15	1510	260	260	E/H/D	8	6662	1950	8x2	00		S, P
STA18	1810	260	260	E/H/D	8	7994	2340	8x200	8x300		S, P
STA20	2010	260	260	E/H/D	8	8883	2601	8x300	8x400		S, P








TRUVA

Who can make the tallest tower? The stack of criss-cross bars makes this heated sculpture strangely reminiscent of childhood building blocks. Who says the fun must stop when we grow up?

® Model shown on opposite page: TRU193-S (brushed matt)

TRUV	A			SS		10 G PRESSURE	↓ 120°C WORKING TEMP.	O C OPEN/CLOSED SYSTEM	MOUNT POS	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	(B	t Output TU/w) ΔT 50	E: Electric onl Choice of Eleme (Watts)	′	Finish S: Brushed Matt P: Polished
TRU134	1320	400	400	E/H/D	60	7180	2102	600		S
TRU193	1960	300	300	E/H/D	92	9980	2922	900		S









ECSTASY

Spiralling perfection. Who would guess this ultra-modern sculpture is also a powerful heat source? This work of art will stop you in its tracks with its simplicity and brilliant technology.


R Model shown on opposite page: ECS50-S (brushed matt)

ECST	ASY			SS MATERIA	AL WORKING		↓ 120°C WORKING TEMP.	O C OPEN/CLOSED SYSTEM	MOUNT POSITION	20 YEARS N WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Н	leat Output	E: Electric	,	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections		(BTU/w) ΔT 50	Choice of El (Watt	ements	S: Brushed Matt P: Polished
ECS50	2200-3000	500	500	E	45	12358	3618	600	900	S

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products





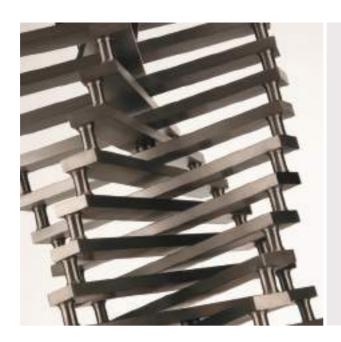



SPEIRA

Time to turn up the heat. This stunning sculptural light and heat installation is so much more than a radiator. Its spiral glamour oozes impact, drama and class. Once seen, never forgotten.

(R) Model shown on opposite page: SPR120 Model shown above: SPR66

SPEIRA			SS MATERIA	IL WORKING	8 PRESSURE	120°C WORKING TEMP.	O C OPEN/CLOSED SYSTEM	FS MOUNT POSITI	*	
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	(1	at Output BTU/w) ΔT 50	E: Electric of Choice of Elem (Watts)	,	Finish S: Brushed Matt P: Polished
SPR120	2400 - 2750	510	510	Н	120	20453	5998	H: Central Heatin	g Only	S
SPR66	2400 - 2750	510	510	Н	66	16652	4876	H: Central Heatin	g Only	S



GRAND DESIGNS: INSPIRATIONS AND INFLUENCES

Just one quick glance through this collection of luxurious heated sculptures from AEON is enough to demonstrate how eclectic the range of designs, sizes and influences is. Our top class team of designers have been inspired by so many different themes and ideas that it would be impossible to list them all on just one page.

Most historical periods are represented, from the flowing grandeur of the Renaissance to the sharp lines of Modernism. Rococo extravagance is present, along with Arts & Crafts charm and Art Deco precision. Influences come from across the globe as well: oriental designs have been included alongside more Mediterranean creations.

Finally, influences from the natural world have been incorporated in the collection to contrast with industrially inspired structures and sculptures.

There really is something to suit everyone's taste and style.
Which is your favourite design?



DESIGNER



ELIXIR	98	TARDIS	136
ABACUS	100	RENDE	138
ARAT L	102	LOKUM	140
ARAT E	104	MADONNA	142
KARE	106	MARBELLA	144
DALYA	108	ZIG ZAG	146
MARION	110	OTTOMAN	148
BAMBOO	112	SUMELA	150
IMZA	114	WAVE	152
MYSTIC	116	ARMADA	154
LUNAR	118	PEGASUS	156
VENETIAN	120	MERIDIEN	156
STRIA	122		
TWISTER	124		
SOFI	126		
SUPRA	128		
PANACEA	132		
PANACEA MIRROR	134		






ELIXIR

When is a table also a radiator? When it's a dramatic triangular heat source. Accompanied by a co-ordinating mirror, this will be the undisputed focal point of any room.

® Model shown on opposite page: ELX120-S (brushed matt) and ELXM120 (brushed matt frame) Mirror

ELIXIR			MATERIAL WORKING PRESSURE			20°C ING TEMP.	O C OPEN/CLOSED SYSTEM	MOUNT POS	20 YEARS WARRANTY		
Product	Height	Length	Depth	Fuel	Fuel Pipes Heat Output		Output	E: Electric only		Finish	
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	,	J/w) 50	Choice of Elements (Watts)		S: Brushed Matt P: Polished	
ELX120	900	1200	255	Н	30	11190	3277	2x600	2x900	S	
ELX150	900	1500	255	Н	30	12425	3638	2x600	2x900	S	
ELXM120 (Mirror)	630	840	60	-	-	-	-			S	
ELXM150 (Mirror)	630	1050	60	-	-	-	-			S	
ELXGS120 (Glass Shelf)	100	840	60	-	-	-	-			S	
ELXGS150 (Glass Shelf)	100	1050	60	-	-	-	-			S	









Model shown: AB1695-SLUM in daylight

Model shown: AB1695-SLUM at night

ABACUS

Who says heating has to be dull? Vibrant, colourful design; perfect for fun-lovers and children's nurseries. Bright globes contrast with sleek stainless steel tubes: a feast for the eyes.


® Model shown on opposite page: AB16-95RAL-vari

ABACUS		SS MATERIAL	WORKING PR	•	120°C RKING TEMP.	O C OPEN/CLOSED SYSTEM	WOUNT POSIT	20 YEARS TION WARRANTY		
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Output (BTU/w) ΔT 50		E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished
AB1070-SRAL	950	460	45	E/H/D	10	3349	982	340	400	S
AB1070-SRAL-v	950	460	45	E/H/D	10	3349	982	340	400	S
AB1070-SSIL	950	460	45	E/H/D	10	3349	982	340	400	S
AB1070-SLUM	950	460	45	E/H/D	10	3349	982	340	400	S
AB1070-SG	950	460	45	E/H/D	10	3349	982	340	400	S
AB1695-SRAL	1600	460	45	E/H/D	10	5159	1513	400	600	S
AB1695-SRAL-v	1600	460	45	E/H/D	10	5159	1513	400	600	S
AB1695-SSIL	1600	460	45	E/H/D	10	5159	1513	400	600	S
AB1695-SLUM	1600	460	45	E/H/D	10	5159	1513	400	600	S
AB1695-SG	1600	460	45	E/H/D	10	5159	1513	400	600	S

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)







Call us on 01908 271155 or visit www.aeon.uk.com

Product specification is subject to change without prior notification.





ARAT L

Discretion meets elegance. Practicality meets style. 40 different sizes for total versatility, with a heat kick that belies its subtle appearance. Ideal for when wall space is at a premium.

(Page 1) Model shown on opposite page: ARL16-6650-P (polished)

ARAT L				SS		10	120°C	O C	V	20 YEARS	
	_			MATERIA	L WORKING	G PRESSURE	WORKING TEMP.	OPEN/CLOSED SYSTE	M MOUNT P	OSITION WARRANTY	
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options	Pipes or		eat Output (BTU/w)	E: Electri		Finish S: Brushed Matt	
Nume	(111111)	(111111)	(111111)	(E/H/D)	Sections		ΔT 50	Choice of E (Watt		P: Polished	
ARL865	660	390	40	E/H/D	8	1551	454	300	400	S, P	
ARL1065	660	490	40	E/H/D	10	1899	556	400		S, P	
ARL1265	660	590	40	E/H/D	12	2247	658	400		S, P	
ARL1465	660	690	40	E/H/D	14	2596	760	400		S, P	
ARL1665	660	790	40	E/H/D	16	2944	862	2x40	0	S, P	
ARL2065	660	990	40	E/H/D	20	3641	1066	2x40	0	S, P	
ARL2465	660	1190	40	Н	24	4338	1270	H: Central Hea	ating Only	S, P	
ARL2865	660	1390	40	Н	28	5427	1589	H: Central Hea	ating Only	S, P	
ARL3265	660	1590	40	Н	32	5731	1678	H: Central Hea	ating Only	S, P	
ARL3665	660	1790	40	Н	36	6428	1882	H: Central He	ating Only	S, P	
ARL4065	660	1990	40	Н	40	7125	2086	H: Central Hea	ating Only	S, P	
ARL876	760	390	40	E/H/D	8	1861	545	300	400	S, P	
ARL1076	760	490	40	E/H/D	10	2279	667	400		S, P	
ARL1276	760	590	40	E/H/D	12	2697	790	400		S, P	
ARL1476	760	690	40	E/H/D	14	3115	912	400		S, P	
ARL1676	760	790	40	E/H/D	16	3533	1034	2x40	0	S, P	
ARL2076	760	990	40	E/H/D	20	4369	1279	2x40	0	S, P	
ARL2476	760	1190	40	Н	24	5205	1524	H: Central Hea	ating Only	S, P	
ARL2876	760	1390	40	Н	28	6513	1907	H: Central Hea	ating Only	S, P	
ARL3276	760	1590	40	Н	32	6878	2014	H: Central Hea	ating Only	S, P	
ARL3676	760	1790	40	Н	36	7714	2258	H: Central Hea	ating Only	S, P	
ARL4076	760	1990	40	Н	40	8550	2503	H: Central He	ating Only	S, P	





ARAT E

Discretion meets elegance. Practicality meets style. 40 different sizes for total versatility, with a heat kick that belies its subtle appearance. Ideal for when wall space is at a premium.

(B) Model shown on opposite page: ARE8-5050-S (brushed matt)

ARAT E		SS	10	1	20°C	O C	VH	20 YEARS		
			MATERIAL	WORKING PRESSU	WORKING PRESSURE WORKING TEMP.		OPEN/CLOSED SYSTEM	MOUNT POSITI	ON WARRANTY	
Product	Height	Length	Depth	Fuel	Pipes	Heat Output		E: Electi	ric only	Finish
Name	(mm)	(mm)	(mm)	Options	or	, -	U/w)	Choice of	Elements	S: Brushed Matt
				(E/H/D)	Sections	Δ	T 50	(Wa	tts)	P: Polished
ARE855	500	390	40	E/H/D	8	1441	422	300	340	S, P
ARE1055	500	490	40	E/H/D	10	1790	524	300	340	S, P
ARE1255	500	590	40	E/H/D	12	2138	626	300	340	S, P
ARE1455	500	690	40	E/H/D	14	2493	730	300	340	S, P
ARE1655	500	790	40	E/H/D	16	2835	830	300	340	S, P
ARE2055	500	990	40	E/H/D	20	3532	1034	300	340	S, P
ARE2455	500	1190	40	Н	24	4229	1238	H: Central H	eating Only	S, P
ARE2855	500	1390	40	Н	28	4925	1442	H: Central H	eating Only	S, P
ARE3255	500	1590	40	Н	32	5622	1646	H: Central H	eating Only	S, P
ARE3655	500	1790	40	Н	36	6319	1850	H: Central H	eating Only	S, P
ARE4055	500	1990	40	Н	40	7016	2054	H: Central H	eating Only	S, P
ARE866	600	390	40	E/H/D	8	1730	506	300	300	S, P
ARE1066	600	490	40	E/H/D	10	2148	629	300	300	S, P
ARE1266	600	590	40	E/H/D	12	2566	751	300	300	S, P
ARE1466	600	690	40	E/H/D	14	2992	876	300	300	S, P
ARE1666	600	790	40	E/H/D	16	3402	996	300	300	S, P
ARE2066	600	990	40	E/H/D	20	4238	1241	2x3	300	S, P
ARE2466	600	1190	40	Н	24	5074	1486	H: Central H	eating Only	S, P
ARE2866	600	1390	40	Н	28	5910	1730	H: Central H	eating Only	S, P
ARE3266	600	1590	40	Н	32	6746	1975	75 H: Central Heating Only		S, P
ARE3666	600	1790	40	Н	36	7583	2220	H: Central H	eating Only	S, P
ARE4066	600	1990	40	Н	40	8419	2465	H: Central H	eating Only	S, P







KARE

Traditional, square design suitable for the home or workspace. This compact radiator offers smooth lines and superb heat delivery. Easy to install; effortless to live with.

(B) Model shown on opposite page: KRE8-66-S (brushed matt)

KARE	E			SS	10	1	20°C	O C	VH	20 YEARS
				MATERIAL	WORKING PRESSUF	RE WORKI	ING TEMP.	OPEN/CLOSED SYSTEM	MOUNT POSITIO	N WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat	Output	E: Electri	c only	Finish
Name	(mm)	(mm)	(mm)	Options	or	(BT	U/w)	Choice of E	lements	S: Brushed Matt
				(E/H/D)	Sections	Δ	T 50	(Wat	ts)	P: Polished
KRE866	600	390	70	E/H/D	8	1885	552	300)	S, P
KRE1066	600	490	70	E/H/D	10	2357	690	300)	S, P
KRE1266	600	590	70	E/H/D	12	2828	828	400)	S, P
KRE1466	600	690	70	E/H/D	14	3299	966	400)	S, P
KRE1666	600	790	70	E/H/D	16	3771	1104	600		S, P
KRE2066	600	990	70	E/H/D	20	4714	1380	600)	S, P
KRE2466	600	1190	70	Н	24	5656	1656	H: Central He	ating Only	S, P
KRE2866	600	1390	70	Н	28	6599	1932	H: Central He	ating Only	S, P
KRE3266	600	1590	70	Н	32	7542	2208	H: Central He	ating Only	S, P
KRE3666	600	1790	70	Н	36	8484	2484	H: Central He	ating Only	S, P
KARE	L									MOUNT POSITION V
KRL876	760	390	70	E/H/D	8	1988	582	300		S, P
KRL1076	760	490	70	E/H/D	10	2459	720	300)	S, P
KRL1276	760	590	70	E/H/D	12	2931	858	400		S, P
KR L1476	760	690	70	E/H/D	14	3402	996	400)	S, P
KRL1676	760	790	70	E/H/D	16	3873	1134	600		S, P
KRL2076	760	990	70	E/H/D	20	4816	1410	600		S, P
KRL2476	760	1190	70	Н	24	5759	1686	H: Central He	ating Only	S, P
KRL2876	760	1390	70	Н	28	6701	1962	H: Central He	ating Only	S, P
KRL3276	760	1590	70	Н	32	7644	2238	H: Central He	ating Only	S, P
KRL3676	760	1790	70	Н	36	8587	2514	H: Central He		S, P
KRL71513	1500	340	60	Н	7	3720	1089	H: Central He		S, P
KRL51816	1800	240	60	Н	5	3299	966	H: Central He		S, P
KRL61816	1800	290	60	Н	6	3928	1150	H: Central He		S, P
KRL52018	2000	340	60	Н	5	3692	1081	H: Central He	ating Only	S, P





DALYA

Squaring the circle. The clever combination of square sections with hollow tubular centres makes this radiator easy to incorporate into any design theme. An attractive way to keep out the cold.

(B) Model shown on opposite page: DAE1466-S (brushed matt) Above left: DAL876-S (brushed matt)

DALYA	F			SS	11	0	120°C	(O) (C)	V	20 YEARS
	_			MATERIAL	WORKING P	RESSURE	WORKING TEMP.	OPEN/CLOSED SYSTEM	MOUNT POSITIO	N WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	ŀ	leat Output	E: Electric	only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections		(BTU/w) ΔT 50	Choice of Ele (Watts	HIEHUS	S: Brushed Matt P: Polished
DAE866	600	390	70	E/H/D	16	2582	756	300		S, P
DAE1066	600	490	70	E/H/D	20	3245	950	300		S, P
DAE1266	600	590	70	E/H/D	24	3894	1140	400		S, P
DAE1466	600	690	70	E/H/D	28	4543	1330	2x300	400	S, P
DAE1666	600	790	70	E/H/D	32	5192	1520	600		S, P
DAE2066	600	990	70	E/H/D	40	6490	1900	600		S, P
DAE2466	600	1190	70	Н	48	7788	2280	H: Central Hea	ting Only	S, P
DAE2866	600	1390	70	Н	56	9085	2660	H: Central Hea	ting Only	S, P
DAE3266	600	1590	70	Н	64	10383	3 3040	H: Central Hear	ting Only	S, P
DAE3666	600	1790	70	Н	72	1168	1 3420	H: Central Hea	ting Only	S, P

DALYA L

DAL876	760	390	70	E/H/D	16	2661	779	30	0	S, P
DAL1076	760	490	70	E/H/D	20	3310	969	30	0	S, P
DAL1276	760	590	70	E/H/D	24	3959	1159	40	0	S, P
DAL1476	760	690	70	E/H/D	28	4608	1349	2x300	400	S, P
DAL1676	760	790	70	E/H/D	32	5257	1539	60	0	S, P
DAL2076	760	990	70	E/H/D	20	6555	1919	60	0	S, P
DAL2476	760	1190	70	Н	48	7852	2299	H: Central He	ating Only	S, P
DAL71513	1500	340	60	Н	14	5127	1501	H: Central He	ating Only	S, P
DAL51816	1800	240	60	Н	10	4533	1327	H: Central He	eating Only	S, P
DAL61816	1800	290	60	Н	12	5393	1579	H: Central He	eating Only	S, P
DAL52018	2000	240	60	Н	10	5072	1485	H: Central He	ating Only	S, P







MARION

Subtle luxury. The simple design belies an easy elegance and versatile performance. This classic radiator will enhance any room of the house – no need to banish it to the kitchen or bathroom.

Model shown on opposite page: MAL51816-S (brushed matt) Above left: MAL2076-S (brushed matt)

MARIC	DN L			SS	1	3	120°C	O C	V	20 YEARS
	, —			MATERIAL	WORKING PI	RESSURE	WORKING TEMP.	OPEN/CLOSED SYSTEM	MOUNT PO	SITION WARRANTY
Product	Height	Length	Depth	Fuel	Pipes		at Output	E: Electr	ic only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	(BTU/w) ΔT 50	Choice of I (Wat		S: Brushed Matt P: Polished
MAL876	760	430	90	E/H/D	16	2739	802	30)	S, P
MAL1076	760	530	90	E/H/D	20	3388	992	40)	S, P
MAL1276	760	630	90	E/H/D	24	4037	1182	40)	S, P
MAL1476	760	730	90	E/H/D	28	4686	1372	40)	S, P
MAL1676	760	830	90	E/H/D	32	5335	1562	60)	S, P
MAL2076	760	1030	90	E/H/D	40	6633	1942	60)	S, P
MAL2476	760	1230	90	Н	48	7931	2322	600	900	S, P
MAL2876	760	1430	90	Н	56	9229	2702	90)	S, P
MAL3276	760	1630	90	Н	64	10527	3082	2x900	900	S, P
MAL3676	760	1830	90	Н	72	11825	3462	2x600	2x900	S, P
MAL4076	760	2030	90	Н	80	13123	3842	2x600	2x900	S, P
MAL71513	1500	380	80	Н	14	5082	1488	340	400	S, P
MAL51816	1800	280	80	Н	10	4471	1309	H: Central He	ating Only	S, P
MAL61816	1800	330	80	Н	12	5335	1562	340	400	S, P
MAL52018	2000	280	80	Н	10	5011	1467	H: Central He	ating Only	S, P







BAMBOO


Brings the outdoors inside. This set of stainless steel hollow bamboo shoots reaches up to the sky. Wall and corner versions introduce a touch of Eastern promise to the room.

Model shown on opposite page: BAW418-S (brushed matt) Above right: BAC618-S (brushed matt)

BAMB	300	WAL	L	M	(SS) ATERIAL	WORKING PRESSURE	WORKIN	NG TEMP.	OPEN/CLOSED SYSTEM	MOUNT POSIT	20 YEARS TON WARRANTY
Product	Height	Length	Depth	Fuel	Towel	Pipes	Heat (Output	E: Electr	ic only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	Gaps	or Sections	Heat Output (BTU/w) ΔT 50		Choice of I		S: Brushed Matt P: Polished
BAW118	1800	80	60	E/H/D	n/a	2	1023	300	300	400	S, P
BAW218	1800	130	90	E/H/D	n/a	4	2043	599	2x300	2x400	S, P
BAW318	1800	200	90	E/H/D	n/a	6	3066	899	3x300	3x400	S, P
BAW418	1800	270	90	E/H/D	n/a	8	4082	1197	4x300	4x400	S, P
BAW812	1200	550	90	E/H/D	n/a	16	5442	1596	8x200	8x300	S, P

BAMBOO CORNER

BAC618	1800	600	600	E/H/D	6	12	6124	1796	6x300	6x400	S, P










IMZA

Reliable and beautiful, created from top quality materials. This slim radiator will become an invaluable part of your home in no time at all and there is a towel bar option for added versatility.

Model shown on opposite page: IMZ200-S (brushed matt) Above left: IMZ200-P (polished)

IMZA				MATERIAL	WORKING PRESSURE	↓ 120°C WORKING TE		CLOSED SYSTEM	V H MOUNT POSITION	20 YEARS WARRANTY
Product	Height	Length	Depth	Fuel	Pipes		Output	E: Elec	tric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	*	J/w) 50		f Elements /atts)	S: Brushed Matt P: Polished
IMZ100	1000	470	50	E/H/D	10	2978	872	300	400	S, P
IMZ150	1500	470	50	E/H/D	10	4485	1313	400	600	S, P
IMZ180	1800	470	50	E/H/D	10	5362	1570	400	600	S, P
IMZ200	2000	470	50	E/H/D	10	5960	1745	600	900	S, P
ITB10 (Towel Bar)	32	420	60							S, P

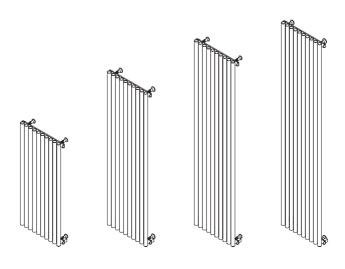



MYSTIC

This is no illusion. The cleverly designed tubular columns appear to hang in the air, while the heat generated is nothing short of miraculous. Ethereal elegance meets stylish stainless steel.

(B) Model shown on opposite page: MYE608-S (brushed matt)

MYST	IC E			SS MATERIAL	WORKING PRESSUR	•	NG TEMP.	O C OPEN/CLOSED SYSTEM	W H	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	(BT	Output U/w) T 50	Choice of	Elements atts)	Finish S: Brushed Matt P: Polished
MYE405	400	340	90	E/H/D	10	1127	330	340	400	S, P
MYE406	400	410	90	E/H/D	12	1353	396	340	400	S, P
MYE407	400	480	90	E/H/D	14	1578	462	340	400	S, P
MYE408	400	550	90	E/H/D	16	1803	528	340	400	S, P
MYE409	400	620	90	E/H/D	18	2029	594	340	400	S, P
MYE410	400	690	90	E/H/D	20	2254	660	400	600	S, P
MYE412	400	830	90	E/H/D	24	2705	792	400	600	S, P
MYE414	400	970	90	E/H/D	28	3156	924	400	600	S, P
MYE416	400	1110	90	E/H/D	32	3607	1056	400	600	S, P
MYE605	600	340	90	E/H/D	10	1691	495	600	900	S, P
MYE606	600	410	90	E/H/D	12	2029	594	340	400	S, P
MYE607	600	480	90	E/H/D	14	2367	693	340	400	S, P
MYE608	600	550	90	E/H/D	16	2705	792	4	00	S, P
MYE609	600	620	90	E/H/D	18	3043	891	4	00	S, P
MYE610	600	690	90	E/H/D	20	3381	990	6	00	S, P
MYE612	600	830	90	E/H/D	24	4058	1188	6	00	S, P
MYE614	600	970	90	E/H/D	28	4734	1386	6	00	S, P
MYE616	600	1110	90	E/H/D	32	5410	1584	600	900	S, P
MYE154	1500	270	90	E/H/D	8	3429	1004	340	400	S, P
MYE155	1500	340	90	E/H/D	10	4287	1255	340	400	S, P
MYE156	1500	410	90	E/H/D	12	5144	1506	340	400	S, P
MYE158	1500	550	90	E/H/D	16	6859	2008	340	400	S, P
MYE184	1800	270	90	E/H/D	8	4085	1196	340	400	S, P
MYE185	1800	340	90	E/H/D	10	5106	1495	340	400	S, P
MYE204	2000	270	90	E/H/D	8	4550	1332	340	400	S, P
MYE205	2000	340	90	E/H/D	10	5687	1665	340	400	S, P
MYE206	2000	410	90	E/H/D	12	6824	1998	340	400	S, P
MYE207	2000	480	90	E/H/D	14	7962	2331	340	400	S, P
MYE208	2000	550	90	E/H/D	16	9099	2664	340	400	S, P

MYSTI	IC L									MOUNT POSITION V
MYL808	780	550	90	E/H/D	16	2842	832	340	400	S, P
MYL809	780	620	90	E/H/D	18	3197	936	340	400	S, P
MYL810	780	690	90	E/H/D	20	3552	1040	400	600	S, P
MYL812	780	830	90	E/H/D	24	4263	1248	60	00	S, P
MYL814	780	970	90	E/H/D	28	4973	1456	60	00	S, P
MYL816	780	1110	90	E/H/D	32	5684	1664	600	900	S, P
MYL820	780	1390	90	E/H/D	40	7104	2080	600	900	S, P





LUNAR

Space-age sophistication. Vertical columns reach for the stars in this visually-stunning radiator that's guaranteed to banish the chill. It's out of this world.

® Model shown on opposite page: LUN2005-S (brushed matt) Above Right: LUN2005-S with Infini Mirror

LUNAR			SS MATERIAL		10 G PRESSURE	120°C WORKING TEMP	OPEN/CL	OSED SYSTEM	V H MOUNT POSITION	20 YEARS WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat 0			ctric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	(BTU ΔT	. ,		of Elements Vatts)	S: Brushed Matt P: Polished
LUN1505	1500	240	30	Н	5	1985	582	H: Centra	Heating Only	S, P
LUN1507	1500	340	30	Н	7	2779	815	H: Centra	l Heating Only	S, P
LUN1510	1500	490	30	Н	10	3969	1164	H: Centra	l Heating Only	S, P
LUN1515	1500	740	30	Н	15	5954	1746	H: Centra	l Heating Only	S, P
LUN1520	1500	990	30	Н	20	7938	2328	H: Centra	l Heating Only	S, P
LUN1805	1800	240	30	Н	5	2380	698	H: Centra	l Heating Only	S, P
LUN1807	1800	340	30	Н	7	3332	977	H: Centra	l Heating Only	S, P
LUN1810	1800	490	30	Н	10	4760	1396	H: Centra	l Heating Only	S, P
LUN1812	1800	590	30	Н	12	5712	1675	H: Centra	l Heating Only	S, P
LUN2005	2000	240	30	Н	5	2646	776	H: Centra	l Heating Only	S, P
LUN2007	2000	340	30	Н	7	3703	1086	H: Centra	l Heating Only	S, P
LUN2007T	2000	320	30	Н	7	3683	1080	H: Centra	l Heating Only	S, P
LUN2010	2000	490	30	Н	10	5292	1552	H: Centra	l Heating Only	S, P
LUN2012	2000	590	30	Н	12	6349	1862	H: Centra	l Heating Only	S, P
LUNTB5 (Towel Bar)	40	240	60							S, P
LUNTB7 (Towel Bar)	40	340	60							S, P
LUNTB10 (Towel Bar)	40	490	60							S, P
INM1826 (Infini Mirror)	1800	260	50							S, P
INM1836 (Infini Mirror)	1800	360	50							S, P
INM2026 (Infini Mirror)	2000	260	50							S, P
INM2036 (Infini Mirror)	2000	360	50							S, P







VENETIAN

Good, old-fashioned glamour. Like the city that inspired it, this radiator is stylish and, above all, cosmopolitan. Install it in the hall for your guests to admire.

Model shown on opposite page: VENTB10-S Clip-on Towel Bar (brushed matt) Above Right: INM1826-S Infini Mirror (brushed matt)

VENETIAN			SS		10	120°C	0	C	VH	20 YEARS
			MATERIAL	WORKING	G PRESSURE	WORKING TEMP.	OPEN/CLOS	ED SYSTEM	MOUNT POSITION	WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat 0	utput	E: Ele	ectric only	Finish
Name	(mm)	(mm)	(mm)	Options	or	(BTU		Choice	of Elements	S: Brushed Matt
				(E/H/D)	Sections	ΔΤ.	50	(Watts)	P: Polished
VEN720	700	505	70	E/H/D	20	3621	1060		400	S, P
VEN725	700	630	70	E/H/D	25	4526	1325		400	S, P
VEN730	700	755	70	E/H/D	30	5431	1590		400	S, P
VEN1015	1000	380	70	E/H/D	15	3919	1148	340	400	S, P
VEN1020	1000	505	70	E/H/D	20	5226	1530		400	S, P
VEN1025	1000	630	70	E/H/D	25	6532	1913		400	S, P
VEN1510	1500	255	70	E/H/D	10	3928	1150	340	400	S, P
VEN1515	1500	380	70	E/H/D	15	5892	1725	340	400	S, P
VEN1520	1500	505	70	E/H/D	20	7856	2300		400	S, P
VEN1525	1500	630	70	E/H/D	25	9820	2875	400	2x340	S, P
VEN1805	1800	130	70	Н	5	2323	680	H: Centra	ll Heating Only	S, P
VEN1810	1800	255	70	Н	10	4645	1360	H: Centra	l Heating Only	S, P
VEN1815	1800	380	70	E/H/D	15	6968	2040	340	400	S, P
VEN1820	1800	505	70	E/H/D	20	9290	2720	340	400	S, P
VEN1825	1800	630	70	E/H/D	25	11611	3400	400	2x340	S, P
VEN2005	2000	130	70	Н	5	2613	765	H: Centra	ll Heating Only	S, P
VEN2008	2000	205	70	Н	8	4181	1224	H: Centra	l Heating Only	S, P
VEN2010	2000	255	70	Н	10	5226	1530	H: Centra	ll Heating Only	S, P
VEN2015	2000	380	70	E/H/D	15	7839	2295	340	400	S, P
VEN2020	2000	505	70	E/H/D	20	10450	3060	340	400	S, P
VEN2025	2000	630	70	E/H/D	25	13062	3825	340	400	S, P
VENTB10 (Towel Bar)	40	255	100							S, P
VENTB15 (Towel Bar)	40	380	100							S, P
VENTB20 (Towel Bar)	40	505	100							S, P
INM1826 (Infini Mirror)	1800	260	50							S, P
INM1836 (Infini Mirror)	1800	360	50							S, P
INM2026 (Infini Mirror)	2000	260	50							S, P
INM2036 (Infini Mirror)	2000	360	50							S, P





STRIA

The kitchen is the hub of the home. Make it warm and cosy with this stainless steel beauty, designed to perch elegantly on the wall while emitting its welcome heat.

■ Model shown on opposite page: STR2010-S (brushed matt)

STRIA				SS	10	•	20°C	O C		20 YEARS
				MATERIAL	WORKING PRESSUI	RE WORKIN	NG TEMP.	OPEN/CLOSED SYS	STEM MOUNT PO	SITION WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat (Output	E	: Electric only	Finish
Name	(mm)	(mm)	(mm)	Options	or	(BTI	U/w)	Cho	ice of Elements	S: Brushed Matt
				(E/H/D)	Sections	ΔΤ	50		(Watts)	P: Polished
STR616	600	425	70	E/H/D	16	2555	748		300	S, P
STR620	600	525	70	E/H/D	20	3183	932		300	S, P
STR624	600	625	70	E/H/D	24	3812	1116	300	400	S, P
STR636	600	925	70	E/H/D	36	5697	1668	300	400	S, P
STR642	600	1075	70	E/H/D	42	6640	1944	300	400	S, P
STR648	600	1225	70	E/H/D	48	7583	2220	400	600	S, P
STR654	600	1375	70	E/H/D	54	8525	2496	400	600	S, P
STR1010	1000	275	70	E/H/D	10	2698	790		300	S, P
STR1016	1000	425	70	E/H/D	16	4276	1252		300	S, P
STR1020	1000	525	70	E/H/D	20	5328	1560	300	400	S, P
STR1024	1000	625	70	E/H/D	24	6380	1868		400	S, P
STR1030	1000	775	70	E/H/D	30	7958	2330	400		S, P
STR1508	1500	225	70	E/H/D	8	3238	948	400		S, P
STR1510	1500	275	70	E/H/D	10	4024	1178	400		S, P
STR1512	1500	325	70	E/H/D	12	4809	1408	400	600	S, P
STR1516	1500	425	70	E/H/D	16	6380	1868		600	S, P
STR1520	1500	525	70	E/H/D	20	7952	2328		600	S, P
STR1808	1800	225	70	E/H/D	8	3832	1122	400		S, P
STR1810	1800	275	70	E/H/D	10	4761	1394	400	600	S, P
STR1812	1800	325	70	E/H/D	12	5690	1666		600	S, P
STR1816	1800	425	70	E/H/D	16	7548	2210		600	S, P
STR1820	1800	525	70	E/H/D	20	9407	2754		600	S, P
STR2008	2000	225	70	E/H/D	8	4310	1262		600	S, P
STR2010	2000	275	70	E/H/D	10	5356	1568		600	S, P
STR2012	2000	325	70	E/H/D	12	6401	1874	600		S, P
STR2016	2000	425	70	E/H/D	16	8491	2486	600		S, P
STR2020	2000	525	70	E/H/D	20	10582	3098	600	900	S, P







TWISTER

Unusual elegance. A range of bold designs twisted along the entire length of the bars to reveal attractive alternating brushed and polished steel. The perfect talking point.

® Model shown on opposite page: Twister 720 degree model Above: Twister 360 degree model

TWISTE	R			SS MATERIAL	WORKING PF		120°C WORKING TEMP.	O C OPEN/CLOSED SYSTEM	MOUNT PO	20 YEARS SITION WARRANTY
Product	Height	Length	Depth	Fuel	Pipes		at Output	E: Electric	E: Electric only	
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	(BTU/w) ΔT 50	Choice of Ele (Watts		S: Brushed Matt P: Polished
TW1505_z180	1500	220	55	Н	5	2015	590	H: Central Heat	ing Only	S/P Bi-finish
TW1505_z360	1500	220	55	Н	5	2015	590	H: Central Heat	ing Only	S/P Bi-finish
TW1507_z180	1500	310	55	Н	7	2821	826	H: Central Heat	ing Only	S/P Bi-finish
TW1507_z360	1500	310	55	Н	7	2821	826	H: Central Heat	ing Only	S/P Bi-finish
TW1509_z180	1500	400	55	Н	9	3627	1062	H: Central Heat	ing Only	S/P Bi-finish
TW1509_z360	1500	400	55	Н	9	3627	1062	H: Central Heat	ing Only	S/P Bi-finish
TW1805_z180	1800	220	55	Н	5	2384	698	H: Central Heat	ing Only	S/P Bi-finish
TW1805_z360	1800	220	55	Н	5	2384	698	H: Central Heat	ing Only	S/P Bi-finish
TW1807_z180	1800	310	55	Н	7	3337	977	H: Central Heat	ing Only	S/P Bi-finish
TW1807_z360	1800	310	55	Н	7	3337	977	H: Central Heat	ing Only	S/P Bi-finish
TW1809_z180	1800	400	55	Н	9	4290	1256	H: Central Heat	ing Only	S/P Bi-finish
TW1809_z360	1800	400	55	Н	9	4290	1256	H: Central Heat	ing Only	S/P Bi-finish
TW2005_z180	2000	220	55	Н	5	2647	775	H: Central Heat	ing Only	S/P Bi-finish
TW2005_z360	2000	220	55	Н	5	2647	775	H: Central Heat	ing Only	S/P Bi-finish
TW2005_z720	2000	220	55	Н	5	2647	775	H: Central Heat	ing Only	S/P Bi-finish
TW2007_z180	2000	310	55	Н	7	3706	1085	H: Central Heat	ing Only	S/P Bi-finish
TW2007_z360	2000	310	55	Н	7	3706	1085	H: Central Heat	ing Only	S/P Bi-finish
TW2007_z720	2000	310	55	Н	7	3706	1085	H: Central Heat	ing Only	S/P Bi-finish
TW2009_z180	2000	400	55	Н	9	4765	1395	H: Central Heat	ing Only	S/P Bi-finish
TW2009_z360	2000	400	55	Н	9	4765	1395	H: Central Heat	ing Only	S/P Bi-finish
TW2009_z720	2000	400	55	Н	9	4765	1395	H: Central Heat	ing Only	S/P Bi-finish






SOFI


Beauty in simplicity. These vertical bars generate a large amount of heat, while providing a visual and tactile delight available in brushed or polished stainless steel.

(P) Model shown on opposite page: SS2005-P (polished)

SOFI				MATERIAL	WORKING PRESS	•	20°C OP	O C PEN/CLOSED SYSTEM	V H	
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	or (BTU/w)		E: Elect Choice of (Wa		Finish S: Brushed Matt P: Polished
SS1505	1500	292	60	E/H/D	5	1878	550	340	400	Р
SS2005	2000	292	60	E/H/D	5	2507	734	340	400	Р






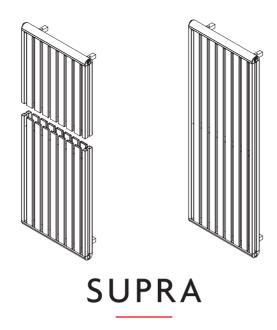

The perfect finishing touch to an ultra-modern bathroom. This slim, dynamic design will enhance everyone's favourite room and set the mood for a luxurious pampering session.

(R) Model shown on opposite page: SUPD

SUPRA	A DO	UBLE		SS MATERIAL	WORKING PRESSU	•	NG TEMP.	O C OPEN/CLOSED SYSTEM	V H MOUNT POSITIO	20 YEARS N WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat	Heat Output E: Electric or		ic only	Finish
Name	(mm)	(mm)	(mm)	Options	or		U/w)	Choice of I	,	S: Brushed Matt
Nume	(11111)	(11111)	(11111)	(E/H/D)	Sections		50	Choice of i		P: Polished
SUPD48	450	880	50	E/H/D	34	3863	1131	60	0	S, P
SUPD64	600	440	50	E/H/D	18	2606	763	340	400	S, P
SUPD65	600	550	50	E/H/D	22	3241	949	40	0	S, P
SUPD66	600	660	50	E/H/D	26	3877	1135	40	0	S, P
SUPD67	600	770	50	E/H/D	30	4512	1321	60	0	S, P
SUPD84	800	440	50	E/H/D	18	3518	1030	340	400	S, P
SUPD85	800	550	50	E/H/D	22	4375	1281	40	0	S, P
SUPD86	800	660	50	E/H/D	26	5233	1532	40	0	S, P
SUPD103	1000	330	50	E/H/D	14	3286	962	340	400	S, P
SUPD104	1000	440	50	Н	18	4348	1273	H: Central He	eating Only	S, P
SUPD105	1000	550	50	E/H/D	22	5407	1583	40	0	S, P
SUPD106	1000	660	50	E/H/D	26	6466	1893	40	0	S, P
SUPD122	1200	220	50	Н	10	2671	782	H: Central He	eating Only	S, P
SUPD123	1200	330	50	Н	14	3945	1155	H: Central He	eating Only	S, P
SUPD124	1200	440	50	Н	18	5216	1527	H: Central He	eating Only	S, P
SUPD125	1200	550	50	Н	22	6490	1900	H: Central He	eating Only	S, P
SUPD126	1200	660	50	E/H/D	26	7760	2272	40	0	S, P
SUPD152	1500	220	50	Н	10	3340	978	H: Central He	eating Only	S, P
SUPD153	1500	330	50	Н	14	4929	1443	340	400	S, P
SUPD154	1500	440	50	Н	18	6520	1909	H: Central He	eating Only	S, P
SUPD155	1500	550	50	E/H/D	22	8112	2375	40	0	S, P
SUPD182	1800	220	50	Н	10	4006	1173	H: Central He	eating Only	S, P
SUPD183	1800	330	50	Н	14	5912	1731	H: Central He	eating Only	S, P
SUPD184	1800	440	50	Н	18	7818	2289	H: Central He	eating Only	S, P
SUPD185	1800	550	50	E/H/D	22	9728	2848	40	0	S, P
SUPD202	2000	220	50	Н	10	4454	1304	H: Central He	eating Only	S, P
SUPD203	2000	330	50	Н	14	6572	1924			S, P
SUPD204	2000	440	50	Н	18	8682	2542	H: Central He	eating Only	S, P
SUPD205	2000	550	50	E/H/D	22	10814	3166	40	0	S, P

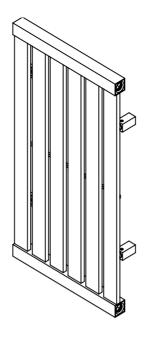


SUPRA

(B) Model shown: SUPS63-S (brushed matt)

SUPRA SINGLE		SS	10	12	20°C	0 0	VH	20 YEARS		
				MATERIAL	WORKING PRESSI	JRE WORKIN	NG TEMP.	OPEN/CLOSED SYSTEM	MOUNT POSI	TION WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat (Output	E: Electi	E: Electric only	
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections		U/w) [50	Choice of (Wa		S: Brushed Matt P: Polished
SUPS63	600	315	30	E/H/D	6	943	276	340	400	S, P
SUPS64	600	425	30	E/H/D	8	1257	368	340	400	S, P
SUPS65	600	535	30	E/H/D	10	1728	506	340	400	S, P
SUPS67	600	700	30	E/H/D	13	2043	598	40	0	S, P
SUPS68	600	810	30	E/H/D	15	2357	690	60	0	S, P
SUPS104	1000	425	30	E/H/D	8	2104	616	340	400	S, P
SUPS105	1000	535	30	E/H/D	10	2893	847	340	400	S, P
SUPS107	1000	700	30	E/H/D	13	3419	1001	40	0	S, P
SUPS124	1200	425	30	E/H/D	8	2541	744	340	400	S, P
SUPS125	1200	535	30	E/H/D	10	3494	1023	340	400	S, P
SUPS127	1200	700	30	E/H/D	13	4129	1209	340	400	S, P
SUPS153	1500	315	30	E/H/D	6	2377	696	340	400	S, P
SUPS154	1500	425	30	E/H/D	8	3170	928	340	400	S, P
SUPS155	1500	535	30	E/H/D	10	4358	1276	40	0	S, P
SUPS182	1800	205	30	Н	4	1899	556	H: Central H	eating Only	S, P
SUPS183	1800	315	30	Н	6	2849	834	H: Central H	eating Only	S, P
SUPS184	1800	425	30	Н	8	3798	1112	H: Central H	eating Only	S, P
SUPS185	1800	535	30	Н	10	5222	1529	H: Central H	eating Only	S, P
SUPS202	2000	205	30	Н	4	2118	620	H: Central H	eating Only	S, P
SUPS203	2000	315	30	Н	6	3177	930	H: Central H	eating Only	S, P
SUPS204	2000	425	30	Н	8	4235	1240	H: Central H	eating Only	S, P





SUPRA

SUPRA	SUPRA TRIPLE			SS	WORKING PRESSUR	•	PO°C IG TEMP.	O C OPEN/CLOSED SYSTEM	V H	20 YEARS WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat Output		E: Electri	ic only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	(BTU/w) ΔT 50		Choice of E		S: Brushed Matt P: Polished
SUPT45	450	550	70	Н	31	3247	951	H: Central He	ating Only	S, P
SUPT46	450	660	70	Н	37	3885	1137	H: Central He	<i>J</i> ,	S, P
SUPT47	450	770	70	E/H/D	43	4520	1323	600)	S, P
SUPT48	450	880	70	E/H/D	49	5159	1510	600)	S, P
SUPT64	600	440	70	Н	25	3481	1019	H: Central He	ating Only	S, P
SUPT65	600	550	70	Н	31	4329	1267	H: Central He	ating Only	S, P
SUPT66	600	660	70	Н	37	5177	1516	H: Central He	ating Only	S, P
SUPT67	600	770	70	E/H/D	43	6025	1764	600)	S, P
SUPT84	800	440	70	Н	25	4697	1375	H: Central He	ating Only	S, P
SUPT85	800	550	70	Н	31	5843	1711	H: Central He	ating Only	S, P
SUPT86	800	660	70	Н	37	6986	2045	H: Central He	ating Only	S, P
SUPT103	1000	330	70	Н	19	4387	1284	H: Central He	ating Only	S, P
SUPT104	1000	440	70	Н	25	5806	1700	H: Central He	ating Only	S, P
SUPT105	1000	550	70	Н	31	7220	2114	H: Central He	ating Only	S, P
SUPT106	1000	660	70	Н	37	8633	2528	H: Central He	ating Only	S, P
SUPT122	1200	220	70	Н	13	3566	1044	H: Central He	ating Only	S, P
SUPT123	1200	330	70	Н	19	5268	1542	H: Central He	ating Only	S, P
SUPT124	1200	440	70	Н	25	6964	2039	H: Central He	ating Only	S, P
SUPT125	1200	550	70	Н	31	8664	2537	H: Central He	ating Only	S, P
SUPT126	1200	660	70	Н	37	10360	3033	H: Central He	ating Only	S, P
SUPT152	1500	220	70	Н	13	4460	1306	H: Central He	ating Only	S, P
SUPT153	1500	330	70	Н	19	6581	1927	H: Central He	ating Only	S, P
SUPT154	1500	440	70	Н	25	8706	2549	H: Central He	ating Only	S, P
SUPT155	1500	550	70	Н	31	10831	3171	H: Central He	ating Only	S, P
SUPT182	1800	220	70	Н	13	5350	1566	H: Central He	ating Only	S, P
SUPT183	1800	330	70	Н	19	7895	2311	H: Central He	ating Only	S, P
SUPT184	1800	440	70	V	25	10439	3056	H: Central He	ating Only	S, P
SUPT185	1800	550	70	V	31	12986	3802	H: Central He		S, P
SUPT202	2000	220	70	Н	13	5946	1741	H: Central He	ating Only	S, P
SUPT203	2000	330	70	V	19	8773	2569	H: Central He	ating Only	S, P
SUPT204	2000	440	70	V	25	11591	3394	H: Central He	<i>J</i> ,	S, P
SUPT205	2000	550	70	V	31	14436	4227	H: Central He	ating Only	S, P



PANACEA

Alluring, understated elegance. This low-slung louvre-style radiator sits unobtrusively against the wall, throwing out plenty of heat without feeling the need to shout about it.

® Model shown on opposite page: PANE0512-S (brushed matt)

PANAC	^F	=		SS	8	12	1.0°C	O C	VH	20 YEARS
1711710		_		MATERIAL	WORKING PRESSU	RE WORKIN	IG TEMP. 0	PEN/CLOSED SYSTEM	MOUNT POSITION	WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat (Output	E: Electr	ic only	Finish
Name	(mm)	(mm)	(mm)	Options	or		J/w)	Choice of I		S: Brushed Matt
				(E/H/D)	Sections		50	(Wai		P: Polished
PANE0504	480	400	70	E/H/D	10	1147	336	30	0	S, P
PANE0505	480	500	70	E/H/D	10	1434	420	30	0	S, P
PANE0506	480	600	70	E/H/D	10	1721	504	30	0	S, P
PANE0507	480	700	70	E/H/D	10	2008	588	30	0	S, P
PANE0508	480	800	70	E/H/D	10	2295	672	30	0	S, P
PANE0509	480	900	70	E/H/D	10	2582	756	30	0	S, P
PANE0510	480	1000	70	E/H/D	10	2869	840	2x3	00	S, P
PANE0512	480	1200	70	E/H/D	10	3442	1008	2x3	00	S, P
PANE0514	480	1400	70	E/H/D	10	4016	1176	2x3	00	S, P
PANE0515	480	1500	70	E/H/D	10	4303	1260	2x3	00	S, P
PANE0516	480	1600	70	E/H/D	10	4590	1344	2x3	00	S, P
PANE0517	480	1700	70	E/H/D	10	4877	1428	2x3	00	S, P
PANE0518	480	1800	70	E/H/D	10	5163	1512	2x3	00	S, P
PANE0520	480	2000	70	E/H/D	10	5737	1680	2x3	00	S, P
PANE0604	620	400	70	E/H/D	13	1492	437	40	0	S, P
PANE0605	620	500	70	E/H/D	13	1865	546	40	0	S, P
PANE0606	620	600	70	E/H/D	13	2238	655	40	0	S, P
PANE0607	620	700	70	E/H/D	13	2610	764	400	2x300	S, P
PANE0608	620	800	70	E/H/D	13	2983	874	400	2x300	S, P
PANE0609	620	900	70	E/H/D	13	3356	983	400	2x300	S, P
PANE0610	620	1000	70	E/H/D	13	3729	1092	2x4	00	S, P
PANE0612	620	1200	70	E/H/D	13	4475	1310	2x4	00	S, P
PANE0614	620	1400	70	E/H/D	13	5221	1529	2x4	00	S, P
PANE0615	620	1500	70	E/H/D	13	5594	1638	2x4	00	S, P
PANE0616	620	1600	70	E/H/D	13	5967	1747	2x4	00	S, P
PANE0617	620	1700	70	E/H/D	13	6340	1856	2x4	00	S, P
PANE0618	620	1800	70	E/H/D	13	6713	1966	2x4	00	S, P
PANE0620	620	2000	70	E/H/D	13	7458	2184	2x4	00	S, P
PANE1004	1035	400	70	E/H/D	22	2524	739	60	0	S, P
PANE1005	1035	500	70	E/H/D	22	3155	924	60	0	S, P
PANE1006	1035	600	70	E/H/D	22	3787	1109	60	0	S, P
PANE1204	1175	400	70	E/H/D	25	2869	840	600	900	S, P
PANE1205	1175	500	70	E/H/D	25	3586	1050	600	900	S, P
PANE1206	1175	600	70	E/H/D	25	4303	1260	600	900	S, P
PANE1504	1500	400	70	E/H/D	32	3672	1075	60	0	S, P
PANE1505	1500	500	70	E/H/D	32	4590	1344	60	0	S, P
PANE1506	1500	600	70	E/H/D	32	5508	1613	60	0	S, P
PANE1804	1825	400	70	E/H/D	39	4475	1310	60	0	S, P
PANE1805	1825	500	70	E/H/D	39	5594	1638	600	900	S, P
PANE1806	1825	600	70	E/H/D	39	6713	1966	600	900	S, P
PANE2004	2015	400	70	E/H/D	43	4934	1445	60	0	S, P
PANE2005	2015	500	70	E/H/D	43	6167	1806	600	900	S, P
PANE2006	2015	600	70	E/H/D	43	7401	2167	600	900	S, P






PANACEA MIRROR

The last word in practicality. Combines a full-length mirror with attractive louvre-style heated bars and LED lights. Perfect for bathrooms, bedrooms... and getting ready for a great night out.

® Model shown on opposite page: PANM180-S and PANMTR6-S clip on towel bar attachment (brushed matt)

PANACEA	MIRF	ROR	MATERI		8 NG PRESSURE	↓ 120°C WORKING TEMP.	OPEN/CLOS	SED SYSTEM	MOUNT POSITION	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat 0 (BTU ΔT :	/w)	Choice	ctric only of Elements Vatts)	Finish S: Brushed Matt P: Polished
PANM1806	1800	600	70	E/H/D	6	3002	879	340	400	S, P
PANMTR6 (Towel Rail)	650	50	95							S, P








TARDIS

A truly bespoke radiator with a glass front which can be printed with any high quality picture of choice. The image possibilities are endless, from a family portrait to a favourite view or a conceptual design.

Model shown on opposite page: TAV1820

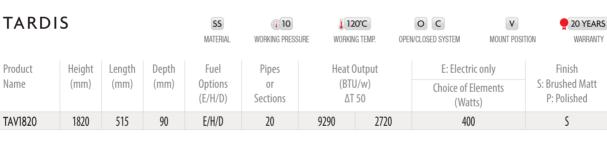

				MS	10	12	50°C	C	VH	20 YEARS
				MATERIAL	WORKING PRESSU	IRE WORKIN	IG TEMP.	CLOSED SYSTEM	MOUNT POSITION	WARRANTY
TAT1820	1820	515	90	Н	20	9156	2681	H: Central H	eating Only	Black

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

Add your own personal signature piece to any room, choose an image to transform into your very own unique radiator. A family portrait or photo montage of your favorite memories, a scenic landscape or a chosen design from an image library will become a talking point. Exclusively made to order, Tardis comes with a 20 year warranty.

This vertical radiator provides a highly efficient heat output which is not compromised by the design. A glass finish vacuum seals the image behind a layer of shatterproof glass, all fixings are discreetly located behind the radiator. Tardis is suitable for hot water, electric or dual fuel installations. Our standard sized offering is 1820mm high x 515mm wide and 90mm deep. If you are looking for an alternative size please get in touch.

We produce all of our own Tardis radiators with great care, as such we can offer the flexibility and attention to detail these home accessories deserve.






RENDE

Reach for the sky. Echoes of the New York skyline are present in this dramatic super-size radiator. Modern art meets up-to-the minute technology as this exciting heat source steps into the limelight.

Model shown on opposite page: RENV520

RENDE					10 ING PRESSURE	120°C WORKING TEMP.		SED SYSTEM	V H MOUNT POSITIO	20 YEARS N WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat Output (BTU/w) ΔT 50		E: Electric only		Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections			Choice of Elements (Watts)		S: Brushed Matt P: Polished
RENV518	1800	560	33	E/H/D	11	2367	693	600	900	S
RENV520	2000	560	33	E/H/D	11	2606	763	600	900	S
RENH518	1800	560	33	E/H/D	27	2261	662	600	900	S
RENH520	2000	560	33	E/H/D	27	2489	729	600	900	S
RENTB50 (Towel Bar)	80	560	100							S

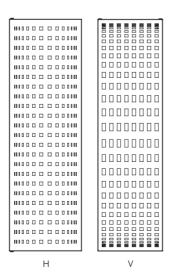






LOKUM

Retro revolution. This funky, powerful radiator stands from floor to ceiling, doubling up as the ideal room divider. Also available as a wall-mounted radiator.

(B) Model shown on opposite page: LOK36-S (brushed matt)

LOKUM		SS MATERIAL	WORKING PRESSUR	E WORKING		O C OPEN/CLOSED SYSTEM	V H MOUNT POSITIO	20 YEARS N WARRANTY		
Product	Height	Length	Depth	Fuel	Pipes		Output	E: Electi	ric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	(BTU/w) ΔT 50		Choice of (Wa		S: Brushed Matt P: Polished
LOK12	570	400	50	Н	12	2172	636	H: Central H	eating Only	S, P
LOK21	1020	400	50	Н	21	3802	1113	H: Central H	eating Only	S, P
LOK30	1470	400	50	Н	30	5431	1590	H: Central H	eating Only	S, P
LOK36	1770	400	50	Н	36	5779	1692	H: Central H	eating Only	S, P
LOK45	2220	400	50	Н	45	8146	2385	H: Central H	eating Only	S, P

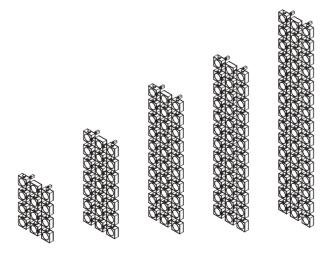

Drawings show Lokum when wall mounted






MADONNA

Vogue. Make room in your house for the Material Girl with this eye-catching pair, guaranteed to raise a smile along with the temperature. This quirky design is flexible and fun.

R1 Model shown on opposite page: MAD400-S (brushed matt)

MADO	NNA			SS MATERIA	SS (7 8 MATERIAL WORKING PRESSURE		I 120°C SURE WORKING TEMP.		O C OPEN/CLOSED SYSTEM	MOUNT POS	20 YEARS ITION WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	ŀ	Heat Outpu (BTU/w) ΔT 50	t	E: Electric or Choice of Elem (Watts)	,	Finish S: Brushed Matt P: Polished
MAD400	400	900	425	Н	2	1339)	392	H: Central Heatin	g Only	S, P

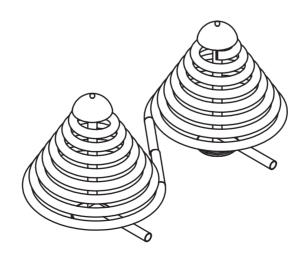






MARBELLA

Sensuous and smooth mixture of natural stone panels and stainless steel bars. A wide choice of sizes and stones allows the tailored design to complement the individual's own style.

Model shown on opposite page: MAR4-P (polished belts) with MNA (Nero Assoluto) granite tiles Above: MAR3T-P (polished towel bars + belts) with MCM (Crema Marfil) marble tiles

MARBELLA				SS WO	10 ORKING PRESSURE	J 120		O C OPEN/CLOSED SYSTEM	MOUNT PO	20 YEARS USITION WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat (Output	E: Electric	only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	Heat Output (BTU/w) ΔT 50		Choice of Elements (Watts)		S: Brushed Matt P: Polished
MAR2	845	600	60	E/H/D	8	1680	492	300	400	S, P
MAR3	1285	600	60	E/H/D	12	2507	734	400	600	S, P
MAR4	1725	600	60	E/H/D	16	3354	982	600	900	S, P
MAR2T	845	600	120	E/H/D	8	1697	497	300	400	S, P
MAR3T	1285	600	120	E/H/D	12	2532	741	400	600	S, P
MAR4T	1725	600	120	E/H/D	16	3388	992	600	900	S, P
MNA (Nero Assoluto)	400	600	60		Black Gr	anite Natura	l Stone - Po	olished finish		
MCM (Crema Marfil)	400	600	60		Beige M	arble Natura	l Stone - P	olished finish		
MTC (Travertine Classico) 400 600 60		60	Beige Travertine Natural Stone - Satin matt finish							

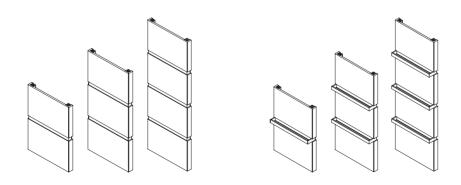





ZIG ZAG

The geometric shape of Zig Zag introduces a simple pattern and form into a room as well as comfort and warmth.

Model shown on opposite page: ZE155S Above left: ZM155S Above right: ZK155S Below: ZT155S

ZIG Z	ZIG ZAG			SS TERIAL WO	10 DRKING PRESSURE	WORKING TEMP. OPEN		O C	V • 20 YEARS MOUNT POSITION WARRANTY	
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	(BTU	Output J/w) 50	Water Content (L)	Finish S: Brushed Matt P: Polished
ZE155S	1500	500	40	E	6	13	1,264	370	4.80	S, P
ZE155	1500	500	40	E	6	13	1,264	370	4.80	S, P
ZK155S	1500	500	40	E/H/D	5	14	1,296	380	3.85	S, P
ZK155	1500	500	40	E/H/D	5	14	1,296	380	3.85	S, P
ZM155S	1500	500	40	E/H/D	3	14	1,296	380	3.72	S, P
ZM155	1500	500	40	E	3	14	1,296	380	3.72	S, P
ZT155S	1500	500	40	E/H/D	6	19	1,742	510	6.10	S, P
ZT155	1500	500	40	E/H/D	6	19	1.742	510	6.10	S. P



Call us on 01908 271155 or visit www.aeon.uk.com Product specification is subject to change without prior notification.





OTTOMAN

Strong and sturdy. Echoing the powerful era of Turkish history for which it is named, this radiator will easily heat a whole room, while built-in LED lights create an after-dark transformation.

® Model shown on opposite page: OTT170-31-S Above: OTT170-60-S with OGT170-S Glass top kit and LLO Light kit

OTTOMAN			SS	10	•	20°C	0 0	FS	20 YEARS	
				MATERIAL	WORKING PRESSUF	RE WORKI	NG TEMP. 0	PEN/CLOSED SYSTEM	MOUNT POSITION	WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat	Output	E: Elect	ric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	*	U/w) Γ50	Choice of (Wa	Elements atts)	S: Brushed Matt P: Polished
OTT1027	500	970	170	Н	27	5356	1571	H: Central H	eating Only	S, P
OTT1031	500	970	170	Н	31	6037	1771	H: Central H	eating Only	S, P
OTT1049	500	970	170	Н	49	8949	2624	H: Central H	eating Only	S, P
OTT1060	500	970	170	Н	60	13423	3936	H: Central H	eating Only	S, P
OTT1227	500	1170	170	Н	27	6695	1963	H: Central H	eating Only	S, P
OTT1231	500	1170	170	Н	31	7547	2213	H: Central H	eating Only	S, P
OTT1249	500	1170	170	Н	49	11187	3281	H: Central H	eating Only	S, P
OTT1260	500	1170	170	Н	60	16779	4920	H: Central H	eating Only	S, P
OTT1527	500	1470	170	Н	27	8703	2552	H: Central H	eating Only	S, P
OTT1531	500	1470	170	Н	31	9811	2877	H: Central H	eating Only	S, P
OTT1549	500	1470	170	Н	49	14543	4265	H: Central H	eating Only	S, P
OTT1560	500	1470	170	Н	60	21812	6397	H: Central H	eating Only	S, P
OTT1727	500	1670	170	Н	27	9372	2748	H: Central H	eating Only	S, P
OTT1731	500	1670	170	Н	31	10504	3080	H: Central H	eating Only	S, P
OTT1749	500	1670	170	Н	49	15565	4564	H: Central H	eating Only	S, P
OTT1760	500	1670	170	Н	60	23351	6848	H: Central H	eating Only	S, P
OGT10	24	820	170		Glass Top I	kit for Ottoma	n 1027 / 1031 ,	/ 1049 / 1060		S, P
OGT12	24	1020	170		Glass Top I	kit for Ottoma	n 1227 / 1231 ,	/ 1249 / 1260		S, P
OGT15	24	1320	170				n 1527 / 1531 ,			S, P
OGT17	24	1520	170		Glass Top I	kit for Ottoma	n 1727 / 1731 ,	/ 1749 / 1760		S, P
LLO										






SUMELA

This low, horizontal radiator is attractive, sturdy and reliable. Its bold industrial appearance is surprisingly versatile, fitting in with almost any interior design theme.

(SPSS) Model shown on opposite page: SUML718-S (brushed matt) using stainless steel pillars (SPSS)

SUMEL	SUMELA roduct Height Length Depth			SS MATERIAL	WORKING PR		120°C WORKING TEMP.	O C OPEN/CLOSED SYSTEM	V MOUNT POS	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Output E: Electric only (BTU/w) Choice of Elements ΔT 50 (Watts)		,	Finish S: Brushed Matt P: Polished	
SUML710	700	945	100	Н	36	5533	1620	H: Central Heating	Only	S
SUML712	700	1090	100	Н	36	6640	1944	H: Central Heating	Only	S
SUML715	700	1590	100	Н	36	8115	2376	H: Central Heating	Only	S
SUML718	700	1800	100	Н	36	8853	2592	H: Central Heating	Only	S
SUML720	700	2090	100	Н	36	9960	2916	H: Central Heating	Only	S
SPSS (Pillars)	AEON Su	mela Stain	less Steel F	Pillars (pair)						S
SPNA (Pillars)	AEON Su	mela Black	Granite -	Nero Assoluto	Pillars (pair)					
SPTC (Pillars)	AEON Su	mela Beige	- Travertir	ne Classico Pilla	ars (pair)					
SPCM (Pillars)	AEON Su	AEON Sumela Beige Marble - Crema Marfil Pillars (pair)								
SPVB (Pillars)	AEON Su	mela Gree	n Granite -	Verde Butterfl	y Pillars (pair)					
SPLA (Pillars)	AEON Sumela Brown Granite - Labrador Antique Pillars (pair)									









WAVE

Woven loveliness. This works horizontally or vertically, and brings a pleasing sense of order to the room. Sensuous and tactile, this gorgeous radiator will appeal to more than just one of your senses.

Model shown on opposite page: WA715h-S (brushed matt) and Verde Butterfly (WPVB) Granite Pillars Above: WA216v

WAVE VER	WAVE VERTICAL			S (:	6	↓ 120°C	C	(C)	V	20 YEARS
			MATE	RIAL WORKIN	NG PRESSURE	WORKING TEMP.	OPEN/CL	OSED SYSTEM	MOUNT POSITION	WARRANTY
Product	Height	Length	Depth	Fuel	Pipes		Output	E: Ele	ctric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections	,	J/w) 50		of Elements Vatts)	S: Brushed Matt P: Polished
WA106v	1070	550	70	Н	14	3897	1141	H: Centra	l Heating Only	S
WA166v	1570	550	70	Н	14	5846	1712	H: Centra	l Heating Only	S
WA216v	2070	550	70	Н	14	7793	2282	H: Centra	l Heating Only	S

WAVE HORIZONTAL									MOUNT POSITION	Н	
WA710h	700	1130	140	Н	14	3897	1141	H: Central Heating Only	S		
WA715h	700	1630	140	Н	14	5846	1712	H: Central Heating Only	S		
WA720h	700										
WPSS (Pillars)	AEON Wa	ave Horizo	ntal Stainle	ess Steel Pillars	(pair)				S		
WPNA (Pillars)	AEON Wa	ave Horizo	ntal Black (Granite - Nero	Assoluto Pilla	rs (pair)					
WPTC (Pillars)	AEON Wa	ave Horizo	ntal Beige -	Travertine Cla	assico Pillars (_I	pair)					
WPCM (Pillars)	AEON Wa	ave Horizo	ntal Beige I	Marble - Crem	a Marfil Pillars	s (pair)					
WPVB (Pillars)	AEON Wa	EON Wave Horizontal Green Granite - Verde Butterfly Pillars (pair)									
WPLA (Pillars)	AEON Wave Horizontal Brown Granite - Labrador Antique Pillars (pair)										









ARMADA

Striking, majestic and bold. This radiator will put you and your home firmly on the map. The versatile design allows great flexibility in the choice of length and number of columns.

(brushed matt) Above left: ARM1821-P (polished) Above right: ARM1821-G (brushed matt with gold laminated discs)

ARMADA		SS	s 10		120°C) C	VH	20 YEARS		
				MATERIAL	WORKING	PRESSURE	WORKING TEMP	P. OPEN/C	LOSED SYSTEM	MOUNT POSITION	WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat	Output	E: Elect	ric only	Finish	1
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections		U/w) Г 50		Elements atts)	S: Brushed Matt G: Gold Laminated	
ARM1221	1200	210	95	E/H/D	4	1804	528	300	400	S, P, G	Ī
ARM1521	1500	210	95	E/H/D	4	2295	672	300	400	S, P, G	Ì
ARM1821	1800	210	95	E/H/D	4	2785	816	400	600	S, P, G	Ì
ARM1247	1200	470	95	E/H/D	8	3609	1057	2 x	300	S, P, G	1
ARM1547	1500	470	95	E/H/D	8	4590	1344	2 x	400	S, P, G	1
ARM1847	1800	470	95	E/H/D	8	5571	1631	2 x	600	S, P, G	i

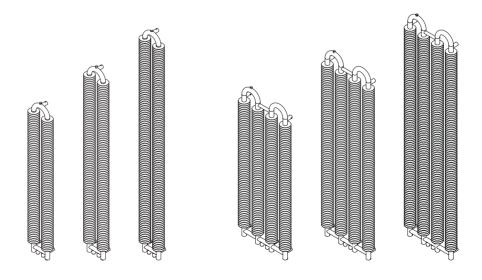

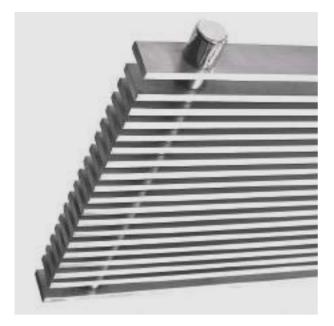

PEGASUS

This design is larger than life. It is tiered against the wall to create an unusual, slimline look that boasts unrivalled attention to detail. What you might call a statement piece.

Model shown: PAG515-60-S (brushed matt)

PEGAS	Product Height Length Denth				SS (10) MATERIAL WORKING PRESSURE		↓ 120°C WORKING TEMP. OPEN		V H MOUNT POSITIO	20 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	(BTI	Output J/w) 50	E: Electr Choice of (Wa	Elements	Finish S: Brushed Matt P: Polished
PAG505-20	510	550	40	E/H/D	20	3039	890	300	400	S, P
PAG510-40	1010	550	40	E/H/D	40	6079	1780	400	600	S, P
PAG515-60	1510	550	40	E/H/D	60	9118	2670	600	900	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

MERIDIEN

Striking and simple. This tall ladder-style radiator doubles as a towel rail. Its narrow dimensions make it perfect for bathrooms with high ceilings and limited wall space.

Model shown: MER100-S (brushed matt)



MERID	MERIDIEN Product Height Length Depth			SS MATERIAL	WORKING PRESSU	I 120		O C PEN/CLOSED SYSTEM	MOUNT POSITION	20 YEARS ON WARRANTY
Product	Height	Length	Depth	Fuel	Pipes	Heat (Output	E: Elect	ric only	Finish
Name	(mm)	(mm)	(mm)	Options (E/H/D)	or Sections		J/w) 50	Choice of (Wa		S: Brushed Matt P: Polished
MER100	1000	330	40	E/H/D	21	1766	517	30	00	S, P
MER150	1500	330	40	E/H/D	32	2497	731	400	600	S, P
MER180	1800	330	40	E/H/D	39	3173	929	600	900	S, P
MER200	2000	330	40	E/H/D	43	3532	1034	600	900	S, P

ALUMINIUM



PLANET MOON	158
STARGATE	160
SESRIEM	162
FLUENT	164





PLANET MOON

The Eagle has landed. Right in your living room, with this stunning show-stopper. Moon crater details bring the galactic theme vividly to life in one of our most unusual radiators.

(R) Model shown on opposite page: PLAM186 (anodised dark silver)

PLANET	MOON	AL MATER		↓ 95°C SURE WORKING TEMP	C CLOSED SYSTEM	WOUNT POSITION	• 10 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Ou (BTU/ ΔT 5	W)
PLAM186	1810	605	45	E/H/D	15	9055	2651

Anodised dark silver finish (as shown opposite) is available from stock. Other finishes including anodised matt silver and gold are available by special order only.

Travel to the moon's surface with Planet Moon. A showstopper in the AEON Collection, Planet Moon allows you to take home your very own piece of outer space.

A direct replica of our moon's surface, we have perfected the necessary techniques to recreate the intricate rocky appearance you see in the night sky.

Craters from asteroid and comet impacts, dead volcanoes and lava flows litter the moon's surface and are depicted here in an accurate representation.

Constructed from a solid aluminium plate and milled using seven different blades, it takes more than 40 hours to carefully craft each individual Planet Moon radiator. The detail can be felt in the texture of the radiator's surface.





STARGATE

Serenity. Calm. Peace. Look into the ever decreasing circles of this restful design to be transported beyond the stars. We defy you not to relax in front of its zen-like quality.

(R) Model shown on opposite page and above: STA186

STARGATE		AL MATER		↓ 95°C SURE WORKING TEMP	C CLOSED SYSTEM	V H MOUNT POSITIO	10 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	(BTI	Output U/w) : 50
STA186	1810	605	45	E/H/D	15	9055	2651

Stargate captures that unique moment when a droplet hits a calm pool of still water. The ripple effect travels outwards spreading indefinitely to the very edges of Stargate.

Smooth circular shapes expand limitlessly across the radiator providing texture and motion against an otherwise unbroken and even painted wall. It is easy to become drawn to Stargate with all of your senses, resisting the curious urge to run your fingers across its wonderfully crafted surface. Stargate is produced in aluminium using specialist technology to create a flawless finish.





SESRIEM

Flowing luxury. Feel yourself relax as you look at this fabulously fluid radiator – then imagine how wonderful its enveloping heat will make you feel. Sink into liquid heaven.

® Model shown on opposite page: SES186

SESRIEM		AL MATER		↓ 95°C SURE WORKING TEMP	C CLOSED SYSTEM	V H MOUNT POSITION	• 10 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Ou (BTU/ ΔT 5	w)
SES186	1810	605	45	E/H/D	15	9055	2651

Sesriem imitates the impressions left behind by the natural motion of drifting sands of the desert.

Organic strokes across the surface replicate the unique, smooth ridges left after the storm has blown across the expanse of an otherwise undisturbed sandscape. The understated metallic satin gold finish offers an elegant accompaniment to any interior. Escape to your own place of peace and tranquillity with calm and warming presence of Sesriem.







FLUENT

Echoes of oriental tranquillity bring a sense of calm to this beautiful radiator. Its fascinating, organic design will ensure it does not fade into the background.

® Model shown on opposite page and above: FLU186

FLUENT		AL MATER		95°C WORKING TEMP.			10 YEARS WARRANTY
Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Out (BTU/v ΔT 50	v)
FLU186	1810	605	45	E/H/D	15	9055	2651

Much like the longitudinal textured pattern found in woodgrain, the natural channels of Fluent meander continuously from one end to another. As the name suggests, Fluent is graceful and effortless in it's simple appearance.

Almost like a freehand line, long strokes present themselves organically, winding along their journey across the calm aluminium surface. Like the treasure of the pattern hidden inside a tree, the grooves are free-flowing and uninterrupted. Fluent can be mounted vertically or horizontally to complement the style of a room.

VALVES & ACCESSORIES



VALVES

Product Name	Description	Brushed Matt	Polished P	Nickel N	White W
CYH850	Cylindrical-30 Angle Manual Rad. Valve + L/S set	V	V		
CYH851	Cylindrical-30 Straight Manual Rad. Valve + L/S set	V	V		
CYH853	Cylindrical-30 Corner Manual Rad. Valve + L/S set	V	V		
CYL850	Cylindrical-25- Angle Manual Rad. Valve + L/S set	V	V		
CYL851	Cylindrical-25 Straight Manual Rad. Valve + L/S set		V		
CUH850	Cubic-30 Angle Manual Rad. Valve + L/S set	V	V		
CUH851	Cubic-30 Straight Manual Rad. Valve + L/S set	V	V		
CUH853	Cubic-30 Corner Manual Rad. Valve + L/S set	V	V		
CUL850	Cubic-25- Angle Manual Rad. Valve + L/S set		V		
CUL851	Cubic-25 Straight Manual Rad. Valve + L/S set		V		
QUA850	Quartz-30 Angle Manual Rad. Valve + L/S set		V		
QUA851	Quartz-30 Straight Manual Rad. Valve + L/S set		/		
TLB850	Traditional-30 Angle Manual Rad. Valve + L/S set	V	V		
BCH850	Barrel-30 Angle Manual Rad. Valve + L/S set		/		
BCH851	Barrel-30 Straight Manual Rad. Valve + L/S set		V		
UAW850N	Angle Thermostatic Valve & TRV Head				1
UAW851N	Straight Thermostatic Valve & TRV Head				1
UAW850NL	Angle Thermostatic Valve & TRV Head/LS Twin Pack				1
UAW851NL	Straight Thermostatic Valve & TRV Head/LS Twin Pack				1/
UAW850	Angle Thermostatic Valve		V		V
UAW851	Straight Thermostatic Valve		V		
UAW853T	Corner Thermostatic Valve & TRV Head	· ·	~		
	TRV Head				
UA109		✓	V		V
RK105	10mm reducing kit - bag of 5 sets		V		
UD850	Décor angle valve pair complete with 15mm tube connectors	<i>V</i>	V		
UD851	Décor straight valve pair complete with 15mm tube connectors	<i>'</i>	V		
UD860	Décor swivel valve pair complete with 15mm tube connectors	V	V		
UD927	Interaxial swivel 50 valve pair complete with 15mm tube connectors and Domignon sensor	<i>'</i>	V		
UD109L	Domignon liquid plastic sensor		V		
CUB841	CUBE - Manual straight valve pair complete with 15mm tube connectors	<i>\</i>	V		
CUB840	CUBE - Manual angle valve pair complete with 15mm tube connectors	<i>'</i>	V		
MIN840	MINIMALIST - Manual angle valve pair complete with 15mm tube connectors	<i>'</i>	V		
ONE851	ONE - Thermostatic straight valve complete with 15mm tube connectors	<i>V</i>	V		
TWI850	TWIN - Thermostatic angle valve complete with 15mm tube connectors	<i>V</i>	V		
TWI851	TWIN - Thermostatic straight valve complete with 15mm tube connectors	<i>V</i>	V		
COR850	CORNER - Thermostatic angle valve pair complete with 15mm tube connectors	V	V		
CYL840	CYLINDER - Manual angle valve pair complete with 15mm tube connectors	V	V		
A409	Aeon Liquid Metal Sensor	V	V		
A574	Manual Knob for Thermostatic Radiator Valves (TRV)	<i>V</i>	V		
A555	PEX/AL/PEX Pipe Adaptor 16-2 mm	V	V		
A556	PEX Pipe Adaptor 16-2 mm	V	V		
A331	Copper Pipe Adaptor 12mm	✓	V		
A332	Copper Pipe Adaptor 15mm	✓	V		
A584	Copper Pipe Adaptor 15mm	✓	V		
A590	Copper Pipe Adaptor 1/2" 15mm	✓	V		
A335	Copper Pipe Adaptor 15mm 3/4" EK	✓	V		
P3015SC14	3/4" x 18 x 10 x 14 Complete Adapting Set for Multilayer Pipe	✓	V		
P3015SC16	3/4" x 18 x 10 x 16 Complete Adapting Set for Multilayer Pipe	✓	V	_	
P925	Straight "H" Valve without by-pass - nickel plated			V	
P926	Angle "H" Valve without by-pass - nickel plated			V	
P915	Straight "H" Valve with by-pass - nickel plated			V	
P916	Angle "H" Valve with by-pass - nickel plated			V	
P99SP	Drain device			V	
P3625	3/4"BSP x 15mm Copper Tube Connector	✓	V	V	







HE/POS RANGE

MOBUS CHROME

FITTINGS

Product Name	Description	Brushed Matt S	Polished P	Nickel N
90MF12	1/2" BSP male to female stainless steel square elbow	V	V	
180MF12S	1/2" BSP male to female stainless steel straight 10mm (Short)	V	V	
180MF12L	1/2" BSP male to female stainless steel straight 30mm (Long)	V	V	
180MF34S	3/4" BSP male to female stainless steel straight 10mm (Short)	V	V	
180MF34L	3/4" BSP male to female stainless steel straight 30mm (Long)	V	V	
180FF1234	3/4" BSP female to 1/2" female stainless steel straight	V	V	
90SL	100 + 100 mm long 15mm in diameter elbow stainless steel tube	V	V	
180SL	200mm long 155 in diameter straight stainless steel tube	V	V	
SPF	1/2" BSP Straight Male Push Fit to 15mm tube (Nickel plated)			V

HEATING ELEMENTS

Product Name	Description	Brushed Matt	Polished P	Nickel N	White W
HE90	90w Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 205mm			V	
HE150	150w Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 300mm			V	
HE300	300w Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 450mm			V	
HE400	400w Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 550mm			V	
HE600	600w Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 760mm			V	
HE900	900w Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mmm, rod length 1050mm			V	
HE250d	200w DRY Heating element kit with 150°C thermostat, 185°C thermal fuse, cable length 1500mm, rod length 550mm			V	
HE300d	300w DRY Heating element kit with 150°C thermostat, 185°C thermal fuse, cable length 1500mm, rod length 650mm			V	
HE400d	400w DRY Heating element kit with 150°C thermostat, 185°C thermal fuse, cable length 1500mm, rod length 850mm			V	
HE600d	600w DRY Heating element kit with 150°C thermostat, 185°C thermal fuse, cable length 1500mm, rod length 1500mm			V	
HES340	340w Heating element, PTC self regulation, cable length 1500mm, rod length 240mm			V	
HES400	400w Heating element, PTC self regulation, cable length 1500mm, rod length 240mm			V	
POS400	400w Poseidon Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 550mm	V	V		
POS600	600w Poseidon Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 760mm	V	V		
AQ300	300w Aquarius Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 450mm	V	V		
AQ600	600w Aquarius Heating element with 70°C thermostat, 127°C thermal fuse, cable length 1500mm, rod length 760mm	V	V		
AES400	400w Aeon Dimhead Heating element - Straight type	V	V		
AES600	600w Aeon Dimhead Heating element - Straight type	V	V		
MB150	150w Mobus PTC Heating element, cable length 900mm, Class I insulation		V		V
MB300	300w Mobus PTC Heating element, cable length 900mm, Class I insulation		V		V
MB600	600w Mobus PTC Heating element, cable length 900mm, Class I insulation		V		V
STCN-1	Stoke Control Box, Bluetooth Low Energy, Class I insulation (for UK +)		V		V
STCN-2	Stoke Control Box, Bluetooth Low Energy, Class II insulation (for France)		V		V
ST150-1	150w Stoke heating element rod for Stoke Control Unit, Class I Insulation (for UK+)				V
ST400-1	400w Stoke heating element rod for Stoke Control Unit, Class I Insulation (for UK+)				V
ST600-1	600w Stoke heating element rod for Stoke Control Unit, Class I Insulation (for UK+)				V
ST900-1	900w Stoke heating element rod for Stoke Control Unit, Class I Insulation (for UK+)				V
ST150-2	150w Stoke heating element rod for Stoke Control Unit, Class II Insulation (for France)				V
ST400-2	400w Stoke heating element rod for Stoke Control Unit, Class II Insulation (for France)				V
ST600-2	600w Stoke heating element rod for Stoke Control Unit, Class II Insulation (for France)				V
ST900-2	900w Stoke heating element rod for Stoke Control Unit, Class IF Insulation (for France)				V
3BV	1/2" BSP 3Bar Valve for Electric only Towel rails - Nickel Plated only			V	
WPC600	600w Wall Plate Controller for standard heating cartridge		V		V
P1300	16mm Pattress Box (supplied min 10pcs in a carton)				V
P1400	25mm Pattress Box (supplied min 10pcs in a carton)				V











TDC

впс

HEAT TRANSFER LIQUID

Product Name	Description
7HTL	Heat transfer liquid for up to 750mm high rails
9HTL	Heat transfer liquid for up to 900mm high rails
11HTL	Heat transfer liquid for 1200mm high rails
17HTL	Heat transfer liquid for 1800mm high rails
20HTI	Heat transfer liquid for up to 2000mm high rails and for all Aeon Products

CLIP-ON ACCESSORIES

Product Name	Description	Polished P
BH	Button Robe Hanger (pair)	V
VH	V Hook (pair)	V
TPH	Toilet Paper Holder	V
TR	Towel Ring	V
TD	Towel Dryer	V

DUAL FUEL COMPONENTS

Product Name	Description	Brushed Matt S	Polished P	Nickel N
TP	1/2"BSP T piece for dual fuel operation	V	V	
4w-TRV+	4 way radiator valve with thermostatic control (white sensor and nickel plated body)			V



ACCESSORIES

Product Name	Description	Brushed Matt S	Polished P	Nickel N	Other
CLRAL	Other RAL colours				V
SJA	1/2" Standard Airvent with "O" ring - Nickel Plated			V	
SJP	1/2" Standard Plug with "0" ring - Nickel Plated			V	
SJA-w	1/2" Standard Nickel Airvent with "O" ring and wh. plastic water diverter			V	
SJA157	1/2" type157 Nickel Airvent Flat D26 Hex 8 1/2" EPDM			V	
SJP154	1/2" type157 Nickel Plug Flat D26 Hex 8 1/2" EPDM			V	
C1574	Plastic cup for type 157 airvent and 154 plug	V	V	V	
SJAC-h	1/2" Designer Chrome Airvent with "O" ring, Semi-Auto		V		
SJPC-h	1/2" Designer Chrome Plug with "0" ring		V		
ASJA	1/2" Full Automatic Airvent with changeable cartridge				V
SPF	1/2" BSP Straight Male to 15mm pipe Push fit - Nickel Plated Only			V	

COLOUR CHART ALUMINIUM



PITACS LTD TERMS & CONDITIONS OF SALE

The buyer's attention is in particular drawn to the provisions of condition 10.4.

Interpretation

- The definitions and rules of interpretation in this condition apply in these conditions. Buyer: the person, firm or company who purchases the Goods from the Seller. Contract: any contract between the Seller and the Buyer for the sale and purchase of the Goods, incorporating these conditions.
- Delivery Point: the place where delivery of the Goods is to take place under condition 4. Goods: any goods agreed in the Contract to be supplied to the Buyer by the Seller (including any part or parts of them).
- Seller: Pitacs Limited trading as Ultraheat and/or Aeon.

- Words in the singular include the plural and in the plural include the singular. A reference to one gender includes a reference to the other gender. Condition headings do not affect the interpretation of these conditions.

Application of terms

- Subject to any variation under condition 2.3 the Contract shall be on these conditions to the exclusion of all other terms and conditions (including any terms or conditions which the Buyer purports to apply under any purchase order, confirmation of order, specification or other document).
- No terms or conditions endorsed on, delivered with or contained in the Buyer's purchase
- No terms or conditions endorsed on, delivered with or contained in the Buyer's purchase order, confirmation of order, specification or other document shall form part of the Contract simply as a result of such document being referred to in the Contract. These conditions apply to all the Seller's sales and any variation to these conditions and any representations about the Goods shall have no effect unless expressly agreed in writing and signed by a director of the Seller. The Buyer acknowledges that it has not relied on any statement, promise or representation made or given by or on behalf of the Seller which is not set out in the Contract. Nothing in this condition shall exclude or limit the Seller's liability for fraudulent misrepresentation.
- inability for reaculused interpersentation. Each order or acceptance of a quotation for Goods by the Buyer from the Seller shall be deemed to be an offer by the Buyer to buy Goods subject to these conditions. No order placed by the Buyer shall be deemed to be accepted by the Seller until a written acknowledgement of order is issued by the Seller or (if earlier) the Seller delivers the Goods
- The Buyer shall ensure that the terms of its order and any applicable specification are complete and accurate
- Complete and accurate.

 Any quotation is given on the basis that no Contract shall come into existence until the Seller despatches an acknowledgement of order to the Buyer. Any quotation is valid for a period of 30 days only from its date, provided that the Seller has not previously withdrawn it.

- **Description**The quantity and description of the Goods shall be as set out in the Seller's quotation or acknowledgement of order.
- acknowledgement of order.

 All samples, drawings, descriptive matter, specifications and advertising issued by the Seller and any descriptions or illustrations contained in the Seller's catalogues or brochures are issued or published for the sole purpose of giving an approximate idea of the Goods described in them. They shall not form part of the Contract and this is not a sale by sample.

- Unless otherwise agreed in writing by the Seller, delivery of the Goods shall take place at the Seller's place of business.

 The Buyer shall take delivery of the Goods within 10 days of the Seller giving it notice that
- The buyer shall nake demely of the Goods within 10 days of the Senergy giving in toutice that the Goods are ready for delivery. Any dates specified by the Seller for delivery of the Goods are intended to be an estimate and time for delivery shall not be made of the essence by notice. If no dates are so specified, delivery shall be within a reasonable time.

 Subject to the other provisions of these conditions the Seller shall not be liable for any
- Subject to the other provisions of these conditions the Seller shall not be liable for any direct, indirect or consequential loss (all three of which terms include, without limitation, pure economic loss, loss of profits, loss of business, depletion of goodwill and similar loss), costs, damages, charges or expenses caused directly or indirectly by any delay in the delivery of the Goods (even if caused by the Seller's negligence), nor shall any delay entitle the Buyer to terminate or rescind the Contract unless such delay exceeds 180 days.

 If for any reason the Buyer fails to accept delivery of any of the Goods when they are ready for delivery, or the Seller's unable to deliver the Goods on time because the Buyer has not provided appropriate instructions, documents, licences or authorisations:

 (a) risk in the Goods shall pass to the Buyer (including for loss or damage caused by the Seller's neolinery):
- Seller's negligence);
 - (b) the Goods shall be deemed to have been delivered; and
- (a) The Goods shall be deemed to have been delivered; and (c) the Seller may store the Goods until delivery, whereupon the Buyer shall be liable for all related costs and expenses (including, without limitation, storage and insurance). The Buyer shall provide at the Delivery Point and at its expense adequate and appropriate equipment and manual labour for loading the Goods. The Seller's delivery personnel
 - (a) deliver Goods to any place at the Delivery Point beyond the ground level hard surface nearest to the Seller's vehicle; nor
- (b) carry Goods up steps.

 The Seller may deliver the Goods by separate instalments. Each separate instalment shall be invoiced and paid for in accordance with the provisions of the Contract. Each instalment shall be a separate Contract and no cancellation or termination of any one Contract relating to an instalment shall entitle the Buyer to repudiate or cancel any other Contract or instalment.
- Unless the Buyer has ordered and paid for a special timed delivery at a time and place agreed by the Seller, the time of delivery shall be at any time on the date of delivery ween 9am and 5pm.
- The Buyer or its representative shall attend at the Delivery Point on the date and at the time of delivery and shall:
 - or delivery and shall.

 (a) forthwith inspect the outside of all packages before signing the delivery note on which note the inspector shall record all and any damage or short delivery;

 (b) within 24 hours of delivery

 - y Within 124 flours to identify in Specific He Goods received; and (ii) check the Goods received against the Goods ordered; and (iii) check the Goods received against the Goods ordered; and (iii) report forthwith to the Seller any visible faults or imperfections and any missing Goods or parts thereof; and
 - inissing Goods or parts titled, and (iv) retain the packaging and delivery documentation of any faulty or imperfect Goods for inspection by the Seller: and
 - (v) not install, adapt, sell or dispose of (nor permit any other person to install, adapt, sell or dispose of) any Goods which the Buyer and/or the person inspecting the delivered Goods has found to be faulty, imperfect or incomplete.

- Norrenteery
 The quantity of any consignment of Goods as recorded by the Seller on despatch from the Seller's place of business shall be conclusive evidence of the quantity received by the Buyer on delivery unless the Buyer can provide conclusive evidence proving the contrary.
- The Seller's All not be liable for any non-delivery of Goods (even if caused by the Seller's a negligence) unless the Buyer gives written notice to the Seller of the non-delivery within 4 days of the date when the Goods would in the ordinary course of events have been received Any liability of the Seller for non-delivery of the Goods shall be limited to replacing the
- Goods within a reasonable time or issuing a credit note at the pro rata Contract rate against any invoice raised for such Goods

- The Goods are at the risk of the Buyer from the time of delivery.
- All Goods supplied by the Seller free of charge remain at all times the property of the Seller unless and until the Seller has agreed in writing to sell such Goods to the Buyer and has

- received payment in full in accordance with sub-clause 6.3 below. Samples supplied by the Seller free of charge may be used for display purposes only and shall be returned (at the Buyer's expense) to the Seller complete and in saleable condition within 3 months of delivery unless a longer period has been agreed in writing by the Seller.

 Ownership of the Goods shall not pass to the Buyer until the Seller has received in full (in
- cash or cleared funds) all sums due to it in respect of:
 - (b) all other sums which are or which become due to the Seller from the Buyer on any account.
- Until ownership of the Goods has passed to the Buyer, the Buyer shall:
 - onto ownership or the Goods has passed to the buyer, the buyer shall:

 (a) hold the Goods on a fiduciary basis as the Seller's bailee;

 (b) store the Goods (at no cost to the Seller) separately from all other goods of the Buyer or any third party in such a way that they remain readily identifiable as the Seller's property; (c) not destroy, deface or obscure any identifying mark or packaging on or relating to the Goods: and
 - Gouds, aim the Goods in satisfactory condition and keep them insured on the Seller's behalf for their full price against all risks to the reasonable satisfaction of the Seller. On request the Buyer shall produce the policy of insurance to the Seller.
- The Buyer may resell the Goods before ownership has passed to it solely on the following
 - (a) any sale shall be effected in the ordinary course of the Buyer's business at full market
 - (b) any such sale shall be a sale of the Seller's property on the Buyer's own behalf and the
- loy any source are shared as ease of use earlier's property of the buyer's own behalf and.

 Buyer's high deal as principal when making such a sale.

 The Buyer's right to possession of the Goods shall terminate immediately if:

 (a) the Buyer has a bankruptcy order made against him or makes an arrangement or composition with his creditors, or otherwise Takes the benefit of any statutory provision for the time being in force for the relief of insolvent debtors, or (being a body corporate) convenes a meeting of creditors (whether formal or informal), or enters into liquidation (whether voluntary or compulsory) except a solvent voluntary liquidation for the purpose only of reconstruction or amalgamation, or has a receiver and/or manager, administrator or administrator exceiver appointed of its undertaking or any part thereof, or documents are filed with the court for the appointment of an administrator of the Buyer or notice of intention to appoint an administrator is given by the Buyer or its directors or by a qualifying floating charge holder (as defined in paragraph 14 of Schedule B1 to the Insolvency Act 1986), or a resolution is passed or a petition presented to any court for the winding-up of the Buyer or for the oration of on administration order in respect of the Buyer, or composition with his creditors, or otherwise takes the benefit of any statutory provision of the Buyer or for the granting of an administration order in respect of the Buyer, or any proceedings are commenced relating to the insolvency or possible insolvency of the
 - Buyer; or (b) the Buyer suffers or allows any execution, whether legal or equitable, to be levied on (b) the buylet suiters of aniows any execution, which are legal or equinative, to be event on this/fits property or obtained against him/ft, or fails to observe or perform any of his/fits obligations under the Contract or any other contract between the Seller and the Buyer, or is unable to pay its debts within the meaning of section 123 of the Insolvency Act 1986 or the Buyer ceases to trade; or (c) the Buyer encumbers or in any way charges any of the Goods.

- (c) the Buyer encumbers or in any way charges any of the Goods.

 The Seller shall be entitled to recover payment for the Goods notwithstanding that ownership of any of the Goods has not passed from the Seller.

 The Buyer grants the Seller, its agents and employees an irrevocable licence at any time to enter any premises where the Goods are or may be stored in order to inspect them, or, where the Buyer's right to possession has terminated, to recover them.

 Where the Seller is unable to determine whether any Goods are the goods in respect of which the Buyer's right to possession has terminated, the Buyer shall be deemed to have sold all goods of the kind sold by the Seller to the Buyer in the order in which they were invoired to the Buyer. nvoiced to the Buyer.
- On termination of the Contract, howsoever caused, the Seller's (but not the Buyer's) rights contained in this condition 6 shall remain in effect.

- Unless otherwise agreed by the Seller in writing, the price for the Goods shall be the price
- set out in the Seller's price list published on the date of delivery or deemed delivery. The price for the Goods shall be exclusive of any value added tax and all costs or charges in relation to packaging, loading, unloading, carriage and insurance, all of which amounts the Buyer shall pay in addition when it is due to pay for the Goods provided that in respect of Goods delivered within Great Britain the price of Goods shall include:
 - (a) packaging, loading, unloading, and an element of insurance over (for details of which cover please contact the Seller); and (b) (for each order that is confirmed by the Seller to exceed its minimum order quantity in respect of that product type and delivery destination) the cost of carriage.

- **Payment**Unless otherwise agreed, the Buyer shall pay in full the price for the Goods in pounds at the time of placing its order with the Seller.
 Subject to condition 8.4, payment of the full balance of the price for the Goods is due in
- pounds sterling on the last working day of the month in which the Goods are delivered or deemed to be delivered
- Time for payment shall be of the essence.

 No payment shall be deemed to have been received until the Seller has received cleared
- All payments payable to the Seller under the Contract shall become due immediately on its
- Am payments begaine on the sener under the Contract shall become use immediately on termination despite any other provision.

 The Buyer shall make all payments due under the Contract in full without any deduction whether by way of set-off, counterclaim, discount, abatement or otherwise unless the Buyer has a valid court order requiring an amount equal to such deduction to be paid by
- buyer has a value durit order requiring an amount equal to such deduction to be paid by the Seller to the Buyer. If the Buyer fails to pay the Seller any sum due pursuant to the Contract, the Buyer shall be liable to pay interest to the Seller on such sum from the due date for payment at the annual rate of 2% above the base lending rate from time to time of Barclays Bank, accruing on a daily basis until payment is made, whether before or after any judgment. The Seller reserves the right to elect to claim interest under the Late Payment of Commercial Debts (Interest) Act 1998.

- Where the Seller is not the manufacturer of the Goods, the Seller shall endeavour to transfer to the Buyer the benefit of any warranty or guarantee given to the Seller. The Seller warrants that (subject to the other provisions of these conditions): (a) on delivery, and for a period of 12 months from the date of delivery, the Goods shall: (i) be of satisfactory quality within the meaning of the Sale of Goods Act 1979

 - (ii) be reasonably fit for any particular purpose for which the Goods are being bought if the Buyer had made known that purpose to the Seller in writing and the Seller has confirmed in writing that it is reasonable for the Buyer to rely on the skill and judgement of the Seller; and
 (b) on delivery, and for a period of 12 months from the date of delivery, electrical appliances shall be free from material defects resulting from faulty manufacture or workmanship; and (c) on delivery, and for a period of 5 years from the date of delivery, Ultraheat Kitchen and Bathroom radiators (excluding Goods falling within the foregoing sub-section (b)) shall be free from material defects resulting from faulty manufacture or workmanship; and (d) on delivery, and for a period of 10 years from the date of delivery, Ultraheat Premier Range (excluding Goods falling within the foregoing sub-sections (b) or (c)) shall be free from material defects resulting from faulty manufacture or workmanship; and (e) on delivery, and for a period of 10 years from the date of delivery, Aeon steel products (e) on delivery, and for a period of 10 years from the date of delivery. Aeon steel products (excluding Goods falling within the foregoing sub-sections (b), (c) or (d)) shall be free from leakage resulting from material defects due to faulty manufacture or workmanship. The Seller shall not be liable for a breach of any of the warranties in condition 9.2 unless:

- (a) the Buyer has complied with its obligations under these terms and conditions, in particular (without limitation) the Buyer's obligations pursuant to clause 4.10 above to inspect all Goods upon and immediately following delivery and notify the Seller promptly and in full of faulty, imperfect or incomplete Goods; and
- (b) the Buyer gives written notice of the defect to the Seller, and, if the defect is as a result of damage in transit to the carrier, within 3 days of the time when the Buyer discovers or ought to have discovered the defect; and
- to have discovered the defect; and (c) the Seller is given a reasonable opportunity after receiving the notice of examining such coods and the Buyer (if asked to do so by the Seller) returns such Goods to the Seller's place of business at the Seller's cost for the examination to take place there.

 The Seller shall not be liable for a breach of any of the warranties in condition 9.2 if: (a) the Buyer makes any further use of such Goods after giving such notice; or (b) the defect arises because the Buyer failed to follow the Seller's oral or written instructions as to the storage, installation, commissioning, use or maintenance of the Goods or (if there are not) and trade the grantier; or
 - of (if there are none) good trade practice; or (c) the serial numbers on the Goods have been removed, erased, concealed or for any other reason are unavailable; or (d) the defect in question arises in whole or in part from reasonable wear and tear; or
 - (c) the Goods have not been installed with reasonable competence and in accordance with the best industry standards in the UK for professional installation of heating and plumbing; or (f) the Buyer alters or repairs such Goods without the written consent of the Seller.
- Subject to condition 9.3 and condition 9.4, if any of the Goods do not conform with either of Journal to Continuors 3-24, and Continuors 3-24, and you the Continuors of the Continuors when the territory in the warranties in condition 9.2 the Seller shall all at its option repair or replace such Goods (or the defective part) or refund the price of such Goods at the pro rata Contract rate provided that, if the Seller so requests, the Buyer shall, at the Seller's expense, return the Goods or the
- part of such Goods which is defective to the Seller.

 If the Seller complies with condition 9.5 it shall have no further liability for a breach of any
- The Search Compiler with Conducting 3.2 in respect of such Goods.

 Any Goods replaced shall belong to the Seller and any repaired or replacement Goods shall be guaranteed on these terms for the unexpired portion of the 12 month period.

- Limitation of liability
 Subject to condition 4, condition 5 and condition 9, the following provisions set out the entire financial liability of the Seller (Including any liability for the acts or omissions of its employees, agents and sub-contractors) to the Buyer in respect of:
 (a) any breach of these conditions;
- (b) any use made or resale by the Buyer of any of the Goods, or of any product incorporating (c) any representation, statement or tortious act or omission including negligence arising
- under or in connection with the Contract.
- 10.2 All warranties, conditions and other terms implied by statute or common law (save for the An wariances, common and other letters imprice by statute or common and ware for to conditions implied by section 12 of the Sale of Goods Act 1979) are, to the fullest extent permitted by law, excluded from the Contract. Nothing in these conditions excludes or limits the liability of the Seller:
- (a) for death or personal injury caused by the Seller's negligence; or (b) under section 2(3), Consumer Protection Act 1987; or (c) for any matter which it would be illegal for the Seller to exclude or attempt to exclude its liability; or
 - (d) for fraud or fraudulent misrepresentation.
- Subject to condition 10.2 and condition 10.3:
 - (a) the Seller's total liability in contract, tort (including negligence or breach of statutory duty), misrepresentation, restitution or otherwise, arising in connection with the performance or contemplated performance of the Contract shall be limited to the Contract
 - (b) the Seller shall not be liable to the Buyer for indirect or consequential loss of profit or loss

- The Seller may assign the Contract or any part of it to any person, firm or company.

 The Buyer shall not be entitled to assign the Contract or any part of it without the prior written consent of the Seller

Force maieure

The Seller reserves the right to defer the date of delivery or to cancel the Contract or reduce the volume of the Goods ordered by the Buyer (without liability to the Buyer) if it is prevented from or delayed in the carrying on of its business due to circumstances beyond the reasonable control of the Seller including, without limitation, acts of God, governmental actions, war or national emergency, acts of terrorism, protests, riot, civil commotion, fire, explosion, flood, epidemic, lock-outs, strikes or other labour disputes (whether or not relating to either party's workfore), or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate or suitable materials, provided that, if the event in question continues for a continuous period in excess of 90 days, the Buyer shall be entitled to give notice in writing to the Seller to terminate the Contract

- Each right or remedy of the Seller under the Contract is without prejudice to any other right or remedy of the Seller whether under the Contract or not.
- of refinery of use search witness during the contact of mid-if any provision of the Contract is found by any court, tribunal or administrative body of competent jurisdiction to be wholly or partly illegal, invalid, void, voidable, unenforceable or unreasonable it shall to the extent of such illegality, invalidity, voidness, voidablity, unenforceability or unreasonableness be deemed severable and the remaining provisions of
- unenrorceaonity or unreasonatoness are deemed severation and in the remaining provisions of the Contract and the remaininger of such provision shall continue in full force and effect.

 13.3 Failure or delay by the Seller in enforcing or partially enforcing any provision of the Contract shall not be construed as a waiver of any of its rights under the Contract.

 13.4 Any waiver by the Seller of any breach of, or any default under, any provision of the Contract by the Buyer shall not be deemed a waiver of any subsequent breach or default and shall in no way affect the other terms of the Contract.
- The parties to the Contract do not intend that any term of the Contract shall be enforceable by virtue of the Contracts (Rights of Third Parties) Act 1999 by any person that is not a
- party to it. The formation, existence, construction, performance, validity and all aspects of the Contract shall be governed by English law and the parties submit to the exclusive jurisdiction of the English courts.

Communications

- All communications between the parties about the Contract shall be in writing and Antonimination between the parties about the Contract shall be in winning and delivered by hand or sent by pre-paid first class poor sent by fax: (a) (in case of communications to the Seller) to its registered office or such changed address as shall be notified to the Buyer by the Seller; or (b) (in the case of the communications to the Buyer) to the registered office of the addressee
 - (if it is a company) or (in any other case) to any address of the Buyer set out in any document which forms part of the Contract or such other address as shall be notified to the Seller by the Buyer.
- Communications shall be deemed to have been received: (a) if sent by pre-paid first class post, two days (excluding Saturdays, Sundays and bank and public holidays) after posting (exclusive of the day of posting); or (b) if delivered by hand, on the day of delivery, or (c) if sent by fax on a working day prior to 4.00 pm, at the time of transmission and
- otherwise on the next working day. Communications addressed to the Seller shall be marked for the attention of Mr Saffet

Terms and Conditions are available as a PDF file upon request. Alternatively, they can be downloaded from our website

BASIC HEAT LOSS CALCULATOR

According to EN 442, inlet water temperature of 75°C, outlet water temperature of 65°C, and room temperature of 20°C are assumed. All heat output figures published in our publications are aligned to EN442.

The total heat output of the radiator you choose must compensate for the heat loss of your room so that it will maintain the interior temperature at 20°C. The following calculation will give you indication of your heat loss. If you would like to take into account all the factors affecting the heat loss, then you will need to use the more comprehensive heat loss calculator available at www.aeon.uk.com

If you have limited space or a very large room, you can always put more than one radiator per room.

Preferably you should locate radiators near windows and doors where heat loss is highest.

Measure your living room in metres:

Height _m: Length_m: Depth_m

ie: H:2.64m, L:3.65m, D:4.94m

Calculate the volume of the room:

 $H \times L \times D =$ cubic metres

ie: $2.64 \times 3.65 \times 4.94 = 47.60$ cubic metres

Multiply by a coefficient for each desired room temperature:

42: bedrooms (to achieve 18°C)

52: bathrooms, wc, living, study, dining etc (to achieve 21°C)

ie : living room (52): $47.60 \times 52 = 2475$ watts

The heat loss in the living room is 2475 watts, but there are following factors we need to consider for a better result – we need to add 10% for every factor given here below.

- Outside walls, if it is a corner room calculate two outside walls, which means (10% and 10%)
- Northern aspect room
- Ceiling height more than 2.7m
- Excessively large windows
- Single glaze
- Outside temperature assumed as -1°C, but if you would like to assume -2°C add 10%, -4°C add another 10%, -10°C add another 10%

ie : One outside wall, excessive window, $2475 \times 1.1 \times 1.1 = 2970$ watts or 2554 kcal or 10144 btu – the final heat loss calculation.

DELIVERY AND RECEIPT OF YOUR GOODS

Do not book your plumber until goods have been delivered and checked.

Date of delivery

For items in stock a suitable delivery date should be arranged at time of order.

For out-of-stock items, an estimated delivery time will be stated on the invoice/receipt.

Please note that the estimated delivery date does not form part of the contract.

Time of delivery

Standard service is any time between 9am and 5pm. Timed deliveries can be made but at an extra cost.

In some instances it may therefore be more convenient to have items delivered to a work address where someone is present to sign for them. In the unlikely event that goods do not arrive before 5pm (for standard service, or the relevant time for a timed delivery), please let us know the following or same day.

Meeting the delivery

Someone will need to be at the delivery address on the day of delivery.

Outside packaging should be inspected before signing the delivery note*. If there is no-one available to sign for delivery, arrangements will be made to re-deliver at an additional cost to the customer.

*If parcels are damaged or have been tampered with in any way they should not be signed for unless marked 'DAMAGED' or 'SHORT DELIVERED'.

No claim for damage in transit or shortage will be accepted if signed for 'RECEIVED IN GOOD CONDITION' or 'UNCHECKED' or 'NOT EXAMINED'.

Please note that, due to Health and Safety legislation, the driver is only allowed to deliver radiators to the nearest hard standing (pavement or driveway) and is not required to carry the radiators up any steps.

Where a radiator is too large or heavy for one man to handle safely, please ensure someone is available at the delivery address to assist the driver.

Within 24 hours of receiving radiators

Please unwrap and thoroughly inspect goods. Any visible fault or imperfection (or missing parts) must be reported to Aeon within one working day (24 hours) of receipt to enable us to send a replacement, otherwise goods shall be deemed to be acceptable.

A content sheet will be enclosed in the box with the radiator to enable you to check that all parts are present.

In the unlikely event that your radiator is visibly faulty, please ensure that you retain all the original packaging. We cannot accept back any radiator on the grounds of visible damage or visible fault if it has been plumbed in.

Pipe centres

We can provide information on the exact position of pipework for any of our radiators.

This means the pipework can be installed before you receive your radiators. Please call if you require these measurements.





QUALITY AND PERFORMANCE

Quality and technology

Aeon towel radiators are manufactured using the most technically advanced, modern equipment and tested to EN442, the harmonised European Standard.

Testing and heating emission

Prior to despatch, every radiator is pressure tested at 10 bars to guarantee a working pressure of 8 bars.

Heat outputs in this brochure are certified by the independent testing authority – HKL Laboratories of Stuttgart in Germany.

Certification

Aeon radiators carry the BS kitemark, which certifies independent approval of heat output to BS EN442 and verifies production under BS ISO 9000 quality system.

Energy and environment

The efficient use of energy and materials is a constant objective of Aeon and a highly qualified team of design and production engineers constantly reviews opportunities for improvement.

Water treatment

The manufacturer's warranty will only be valid if radiators are installed in accordance with BS 5449 section 5 'Commissioning'.

Please call for further Aeon terms and conditions of sale.

The Aeon Collection

All the products are manufactured out of 100% stainless steel* ensuring that the Aeon Collection will keep their good looks for as long as the name suggests.

Our commitment to quality is backed by a 20-year warranty for the stainless steel collection and 10-year warranty for the aluminium collection.

Radiators are supplied with brackets, blanking plugs, airvents, fixing screws, rawl plugs, airvent key and 1/2" connections.

Heat output listed in this brochure as $75/65/20^{\circ}$ C with Delta T of 50° C, means 75° C inlet water temperature, 65° C outlet water temperature and 20° C room temperature.

Aeon stainless steel radiators can be used in both direct (open circuit) and indirect (closed circuit) applications.

Open systems are supplied by special order only at a small additional cost. Closed systems are available from stock.

Radiators are finished in brushed satin chrome stainless steel with no coating or treatment.

Aeon policy

Ownership and property rights of the designs in this publication belong to Aeon and are registered in the UK and major trade mark and design registry offices worldwide.

The complete Aeon range is not limited to the content of this brochure, additional products launched between publications will appear on our website: www.aeon.uk.com



^{*} Not applicable to Rende (mild steel core)

THE HEART OF THE HOME

The kitchen is the heart of the home. It is where the family's meals are prepared and eaten, dishes washed and confidences shared over a cuppa. We spend a great deal of time in our kitchens, one way or another, so it is crucial to have flawless heating available on tap. Designers are paying kitchens far more attention these days, and results have been stunning. Statement ovens, clever lighting, funky storage... why should the fun stop when it comes to heating the room?

When it comes to kitchen heating, you can opt for tall and elegant or run with bold, square and reassuringly chunky. Either way, it is perfectly possible to combine visual appeal with unfailing reliability. At AEON, we pride ourselves on providing just that winning combination. Could your kitchen benefit from a bit of extra warmth?





PAYING TRIBUTE TO A COSY HOME

'There's no place like home,' declared Dorothy in the 1939 film, The Wizard of Oz. And she was right. Especially when the home in question is warm and cosy - a haven from the stresses of the outside world. Even when Dorothy was having fun in Oz, her thoughts never strayed far from her beloved home.

There really is nothing better than coming back to a warm home after a day's adventures, ready to snuggle down next to a warm radiator, or to add some fluffy towels to the heated rail in the bathroom, ready to step into after a relaxing bath.

Our radiators and towel rails come with a reassuring 20-year warranty for the Stainless Steel collection and 10-year warranty for the Aluminium collection to make sure your home remains warm. Now that's something worth getting back to, no matter how long the journey on the yellow brick road might be.



Stainless Steel Collection



Aluminium Collection





Pitacs Limited Bradbourne Point, Bradbourne Drive Tilbrook, Milton Keynes Buckinghamshire MK7 8AT United Kingdom

> Tel: 01908 271155 Fax: 01908 640017 Email: aeon@pitacs.com www.aeon.uk.com







