

## Product Overview

The AKW Arka Care Cool Touch TMV2 Mixer Shower and Kit allows a safe and enjoyable experience whilst showering. The cool touch thermostatic technology ensures the main body is safe to touch – whilst the temperature of the water is kept to the UK regulation.

## Features & Benefits:

- + Extremely safe due to thermostatic cartridge and cool touch technology
- + Stainless steel grab riser rail can support up to 150kg for additional support and peace of mind
- + Three spray pattern settings for maximum showering comfort
- + Easy-push buttons for shower head height adjustments
- + Easy-to-grip handles for those with limited dexterity
- + Soap dish / shelf included as standard and situated within easy reach for user
- + Additional shower head bracket for alternative positioning within the enclosure
- + Hose retaining ring integral within soap dish prevents shower head being dropped and contaminated from contact with other areas
- + The valve can be set to comply with TMV2 specification (max. 41 degrees) and will comply if set correctly
- + Temperature can be overridden to achieve warmer temperature if required
- + Longer reach 2m hose provides greater flexibility and is especially useful for assisted showering
- + Rounded levers on the main body preventing risk of injury if someone was to fall
- + Independently operated flow and temperature controls for safer use



## Product codes:

AKW Arka Care Cool Touch TMV2 Mixer Shower Only	25430
AKW Arka Care Cool Touch TMV2 Mixer Shower & Care Kit	25430CH

## Related products:

Easy Clean Chrome Shower Handset with spare white faceplate	13-012-269
--	------------

## Guarantees & Approvals




## Product specification

Dynamic Pressure Range	0.5 to 5 bar dynamic
Static Pressure	Max. 10 bar static pressure
Inlet fittings	¾" BSP
Outlet fitting	½" BSP
Material Finish	Brass, Plastic Chrome Plated
Colour	Silver
Minimum Dynamic Pressure	0.5 to 5 bar dynamic
Maximum Static Pressure	10 bar static pressure
Inlet Cold Temperature Range	>25°C
Inlet Hot Temperature Range	55°C-65°C
Temperate Range	25°C~49°C Max adjustable range
Safety Setting	38°C override button setting TMV2 Max set temp: 41°C
Flow	8.5L/min @ 3 bar
Material – body construction (including mounting brackets):	Brass, chrome plated
Material – handle construction:	Plastic, chrome plated
Material – levers:	Zinc Alloy, chrome plated
Material – riser rail:	Stainless Steel 600mm length



## Dimensions:

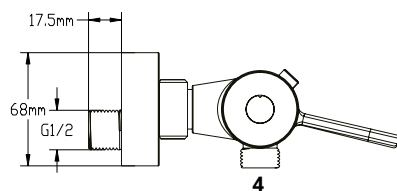

### Connections:

1. Hot – Left (side nearest flow control). Identified with a RED mark
2. Cold – Right (side nearest temperature control). Identified with a BLUE mark
3. Inlet ¾" BSP
4. Shower Valve Outlet (underneath) ½" BSP

