

# identiti

## Hinge Door

april  
PRODUCTS

## INSTALLATION INSTRUCTIONS

[www.aprilproducts.co.uk](http://www.aprilproducts.co.uk)

### Lifetime Product Guarantee

#### ATTENTION!

Are you fitting this April enclosure to an April shower tray?

The Lifetime Product Guarantee is only valid when an April enclosure is fitted with an April shower tray and are used and maintained in accordance with the manufacturer's instructions (guarantee excludes seals and magnets). When April enclosures are used with any other shower tray the guarantee period is limited to 10 years.

Please see our website for full Terms & Conditions.

To activate your Product Guarantee please visit [www.aprilproducts.co.uk](http://www.aprilproducts.co.uk) and complete the online form.


### Tools Required



Drill



7 mm Masonry Drill  
3.2 mm HSS Drill



Tape Measure




Spirit level



PH2 TYPE  
Screwdriver



Pencil



Sealant Gun

Please note hand tools **NOT** supplied.

### IMPORTANT


These instructions assume that installation is done against solid/tiled wall.

The wall plugs supplied with the installation kit are for use on solid walls. Hollow or stud-partition walls will require alternative fixings. Please consult with a reputable trades person or hardware supplier for the correct type of fixing.

It may also be necessary to consult your tiling supplier about the correct method for drilling your tiles.

Please check this product for damage prior to starting the installation. No claims can be made after the product has been fitted. This is a 2 person installation. Please note the minimum and maximum adjustment for this product are based on perfectly plum walls.

**USE SAFETY EYE-WEAR WHEN DRILLING**

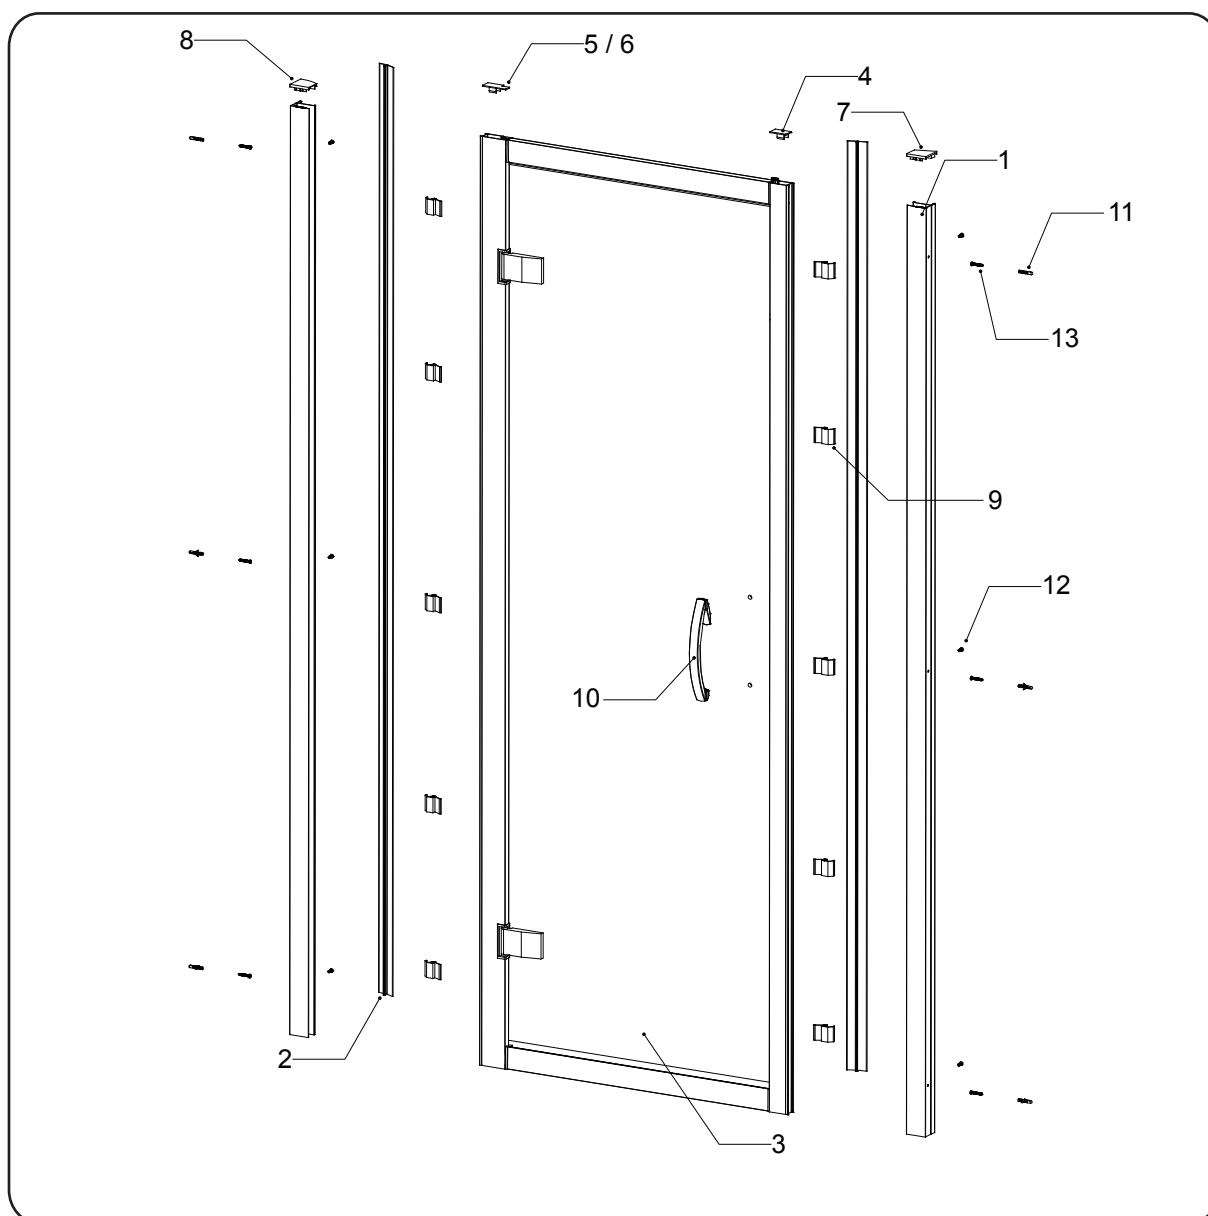


## Box Contents

SN	Code	Description	Qty
1	ID2PF001	Wall Profile	2
2	ID2PF002	Cover Strip	2
3	ID2GS027	Door Panel	1
4	ID2FT003	Upright Profile Cap A	1
5	ID2FT004	Upright Profile Cap B - LH	1
6	ID2FT005	Upright Profile Cap C - RH	1
7	ID2FT008	Wall Profile Cap - LH	1
8	ID2FT009	Wall Profile Cap - RH	1
9	ID2FT034	Cover Strip Fixing Clip	10
10	ID2FT041	Handle	1
11	APTL001	Wall Plug	6
12	APTL008	Screw ST3.9×16	6
13	APTL009	Screw ST3.9×30	6

**Note:** Further part details for fixing kit available on page 2

## FIXING KIT

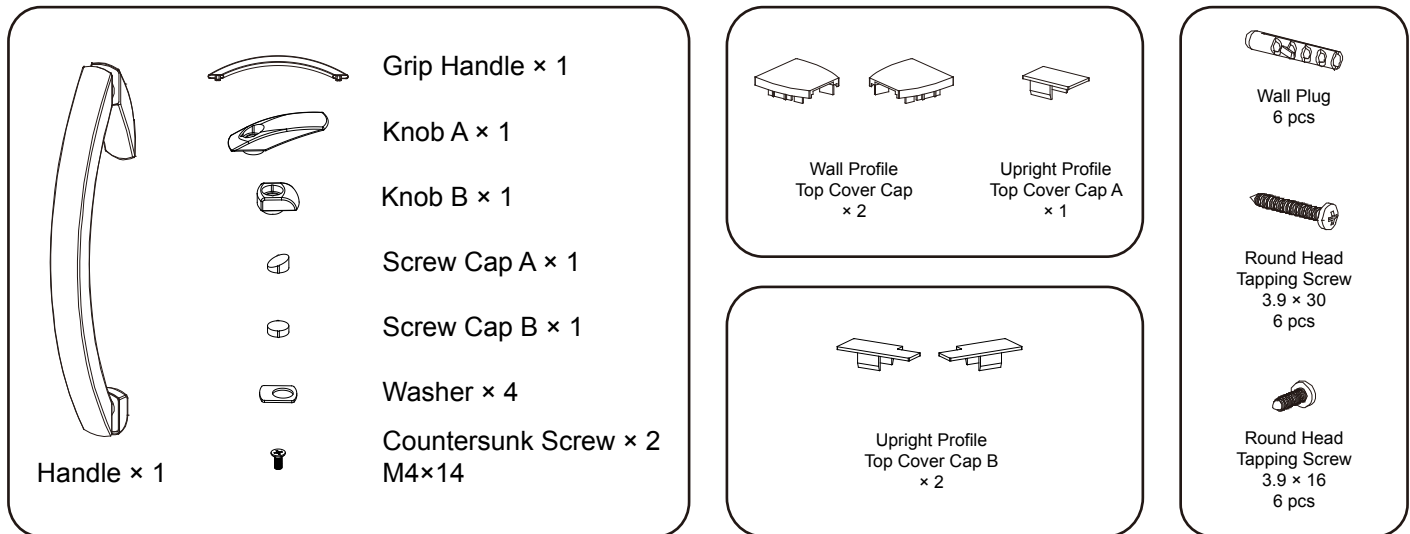

## IMPORTANT - Missing Components


Please check this product for missing components prior to installation.

For spare parts visit [www.aprilproducts.co.uk](http://www.aprilproducts.co.uk)

## IMPORTANT - Installation site

1. Ensure the top surface of the shower tray on which the enclosure will be installed is level in every direction.
2. The tiles or other wall finishing should be effectively sealed at tray edges.
3. Tiles should extend at least to the corner of the tray and a minimum of 1.9 metres from the top of the tray.


## PROCEDURE

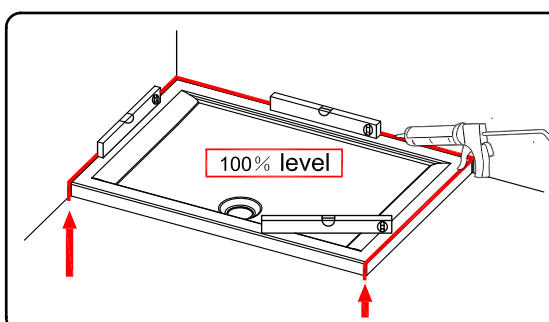

### TRAY MUST BE 100% LEVEL IN ALL DIRECTIONS

Ensure the shower tray is level in all directions and is properly sealed to the wall. The wall must be tiled down to the top edge of the tray. **Do not angle out bottom tile.**

**TRAY MUST BE SEALED FULLY AROUND WHERE THE TRAY MEETS THE WALL.**

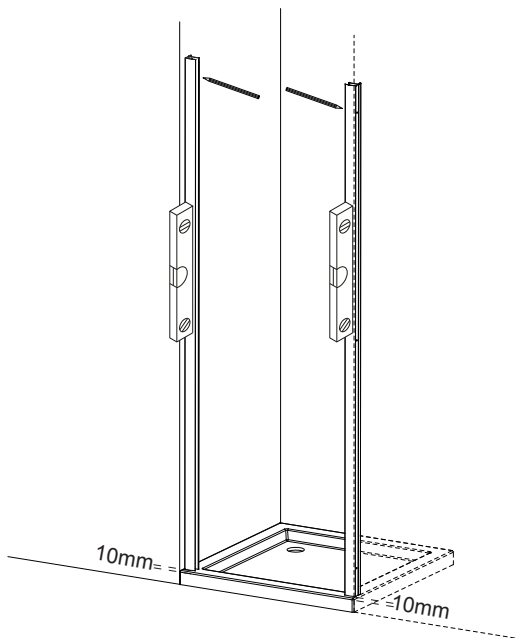

### Step 1.1 & 1.2


#### Step 1.

**1.1** Position the wall profiles (**No.1**) to wall as shown (roughly 10mm from the front of the tray).


**1.2** Level the frame using a spirit level.

**1.3** Once you are happy that the frame sits on the tray correctly mark the wall through the 3 pre-drilled screw holes in the wall profiles.

**NOTE:** You may find it easier to mark and drill the wall if you apply masking tape to it first.

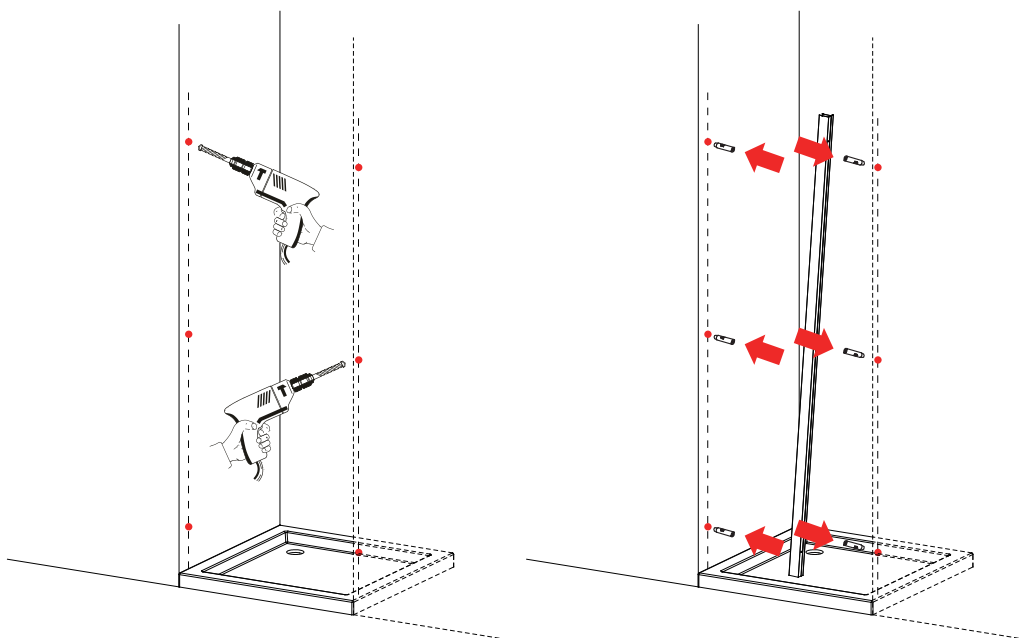




### Step 2.1



#### Step 2.

**2.1** Remove the wall profiles and drill the marked points using a 8mm masonry drill bit, once this is done insert 6 × wall plugs (**No.12**).


**2.2** Fix the wall profile (Seal profile side) to wall using the screws ST3.9 × 30 (**No.14**).

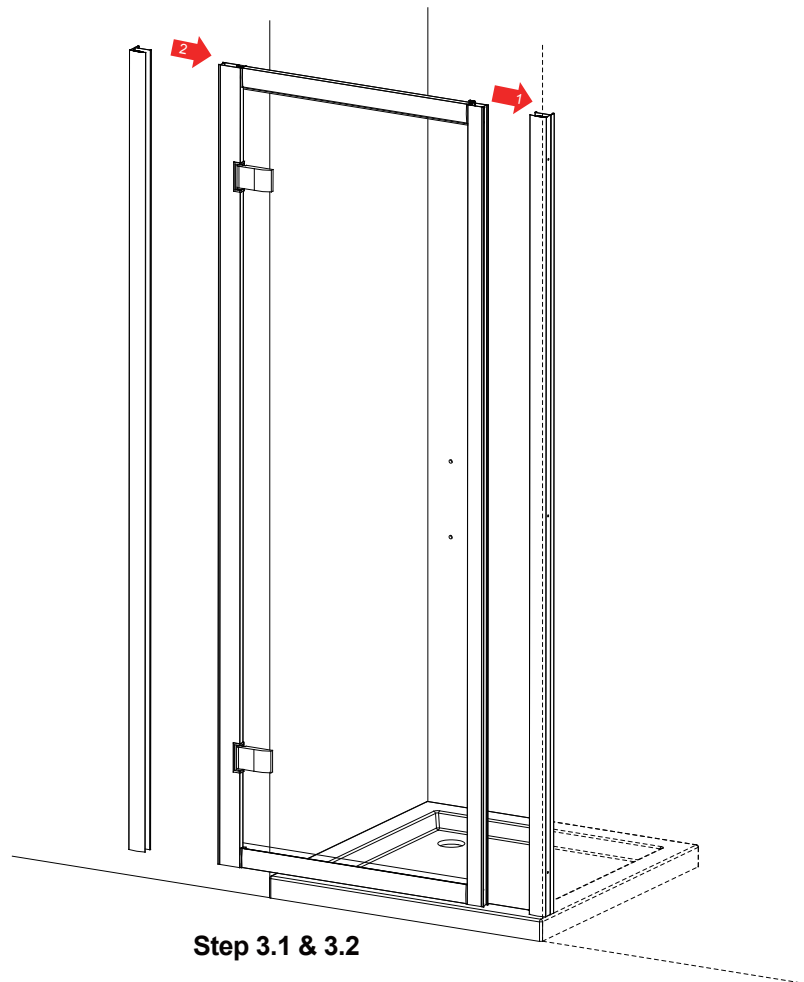

### Step 3.


**3.1** Push the other wall profile to the hinged side.

**3.2** Then insert the frame into the fixed wall profile as shown.




### Step 4.

Fix the other wall profile using screws ST3.9 × 30 (**No.14**).






**Step 5**



### Step 5.


Adjust the frame to ensure that it is central between the wall profiles and level against the shower tray at the base.

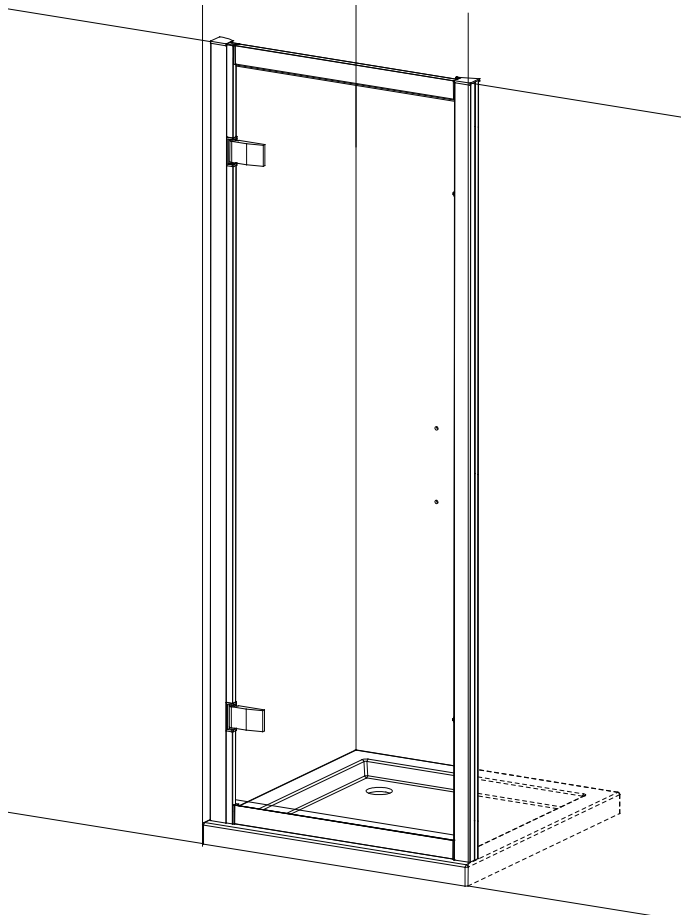

### Step 6.



6.1 Drill 3 equally spaced holes with a 3mm drill bit through the wall profiles and frame.

6.2 Fix the frame to the wall profiles using the screws ST3.9 × 16 (**No.13** - 3 per wall profile).



### Step 7.


Fix the handle (**No.11**) to door panel.



### Step 8

### Step 8.


Once you are happy that the installation is correct, Push 5 x Profile Clips (No.10) in to the wall profile and evenly space. Push the Cover Profile (No.2) into the Profile Clips as shown.

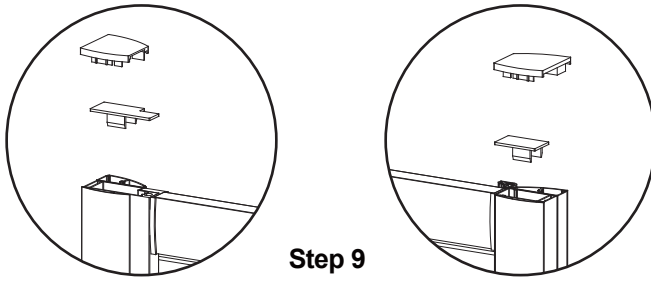

Step 9

**Step 9.**

Fit the upright profile top caps (**No.5,6**) and wall profiles top caps (**No.7,8**) as shown.

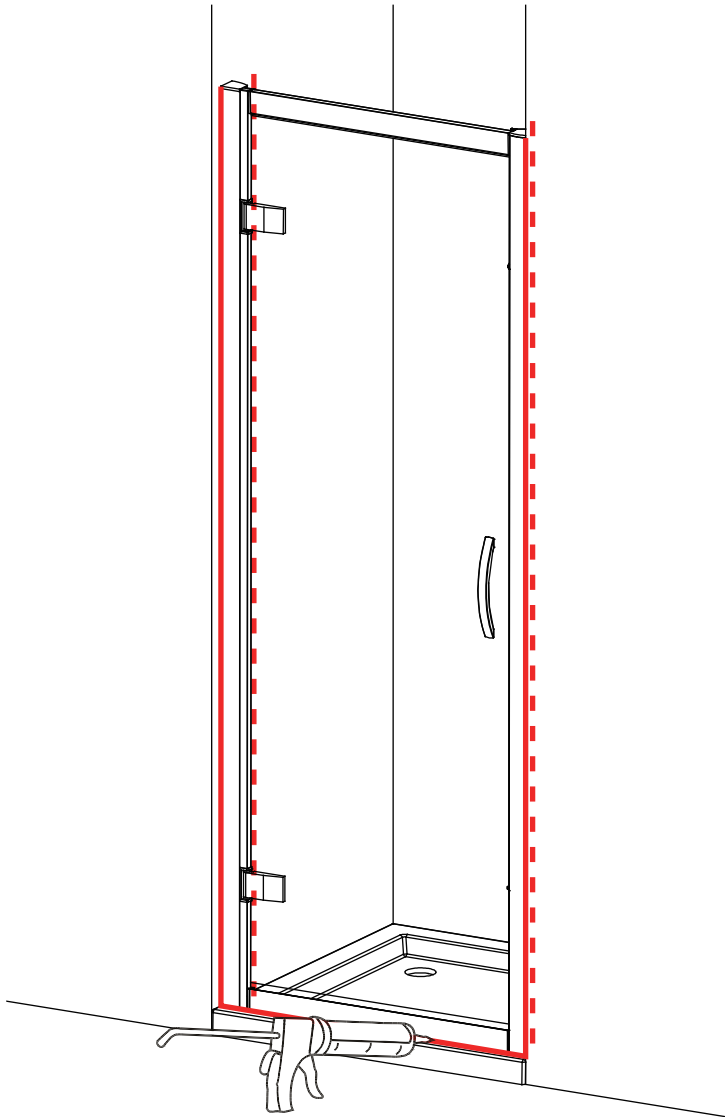**24 HRS**

**DO NOT USE THE  
ENCLOSURE FOR  
24 HOURS AFTER  
SEALING**

**Applying Silicone Sealant****Sealing Inside**

Seal from the top of the wall profile to the bottom on the **INSIDE** between the wall profile and the wall.

**IMPORTANT:** Do not apply sealant on inside of the tray.

**Sealing Outside**

Seal from the top of the wall profile to the bottom between the wall profile and tiles on both sides. Also seal along the bottom where the frame meets the tray. Seal the joints between the bottom profile and any upright profiles.


## AFTERCARE

### Cleaning Instructions

It is important to clean your April shower enclosure after every use. Please wipe down all glass and metal parts with a clean soft cloth. Ensure that all residual water on the glass is removed after every use.

### Usage

For reliable, watertight performance from your April enclosure your shower head should not be positioned so that the shower sprays directly onto the enclosure door. Failure to comply with this may cause the shower to leak. Outward opening doors may cause water to drip onto the floor, please ensure that the floor covering immediately outside the enclosure will not be affected by water.



This product has been treated with Clean & Clear™ easy clean glass treatment, a protective barrier which creates a 'non-stick' surface on your glass, helping to resist lime scale build up and water spots. For further information on Clean & Clear™ please visit [www.aprilproducts.co.uk](http://www.aprilproducts.co.uk)

### Aftercare

Clean & Clear™ glass can be cleaned with any suitable nonabrasive glass cleaner - with PH value of between 3-11; the coating will not be damaged. Avoid surfactants and heavily perfumed products. Vinegar and water based products are very effective. Do not use abrasive scrubbing cleaners or equipment for cleaning.

### Warranty

Limited 5 year Warranty for Clean & Clear™ treatment: To guarantee treated surfaces will remain more repellent than untreated glass for 5 years from start of use, as long as basic manufacturer maintenance recommendations are followed and no harsh or abrasive cleaners are used.

### Aftercare & Reapplication Kit

To continue the benefits of the Clean & Clear™ glass treatment an aftercare & reapplication kit is available at [www.aprilproducts.co.uk](http://www.aprilproducts.co.uk)