

## Contour 21 Accessible Washbasin 56cm 1 Central Overflow No Chainstay Hole

### ILLUSTRATED

<b>S2165</b>	Contour 21 accessible washbasin, 55cm, 1 taphole with overflow
<b>E0157</b>	Wall fixing set
<b>A6696</b>	Markwik 21+ 1 hole thermostatic basin mixer, single sequential lever, demountable with copper tails
<b>S8733</b>	Waste 1½" brass anti theft swivel plug waste, 80mm slotted tail
<b>E0079</b>	Trap 1½" Contemporary metal bottle, 75mm seal

### OPTIONS

<b>E0062</b>	Basin fixing set for IPS panels or block walls
<b>S7449</b>	Nuastyle washbasin thermostatic mixer 1 hole sequential lever, flexible tails
<b>A6697</b>	Contour 21+ 1 hole thermostatic basin mixer, single sequential lever with copper tails
<b>A6698</b>	Contour 21+ 1 hole thermostatic basin mixer, single sequential lever with flexible tails
<b>A6790</b>	Contour 21+ Outline 1 hole thermostatic basin mixer, single sequential lever with flexible tails
<b>S8920</b>	Trap 1½" plastic resealing bottle, 75mm seal, multi-purpose outlet

### ILLUSTRATED PRODUCT DETAILS

#### Sizes

**S2165** w:55 x d:55






#### Weights

**S2165** 16.89 KG  
**E0157** 0.16 KG  
**A6696** 2.50 KG  
**S8733** 0.35 KG  
**E0079** 1.45 KG

#### Materials

**S2165** Vitreous China  
**E0157** Metal  
**A6696** Chrome Plated Brass  
**S8733** Chrome Plated Metal  
**E0079** Chrome Plated Metal

#### Finishes

<b>S2165</b>	 White (01)
<b>E0157</b>	 Neutral / No Finish (67)
<b>A6696</b>	 Chrome (AA)
<b>S8733</b>	 Chrome (AA)
<b>E0079</b>	 Chrome (AA)

#### Flow rates

**A6696** 7.9 Litres per minute @ 3 bar pressure

#### Designer

Robin Levien, RDI

#### Standards

Washbasin to BS EN 14688 & BS EN 31


#### Special Notes

Suggested rim height 680-700 for wheelchair or seated users. Washbasin wall mounted using E0157 wall fixing set or panel mounted using E0062 fixing set.

Suitable for use with handrinse basins in public areas and Doc M. Satisfies DDA requirements. Single easy use lever operates on/off and temperature control. Eliminates the need for premixed water.

E: [info@idealspec.co.uk](mailto:info@idealspec.co.uk) | T: 0870 122 8822 | F: 0870 122 8282 | [www.idealspec.co.uk](http://www.idealspec.co.uk)

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

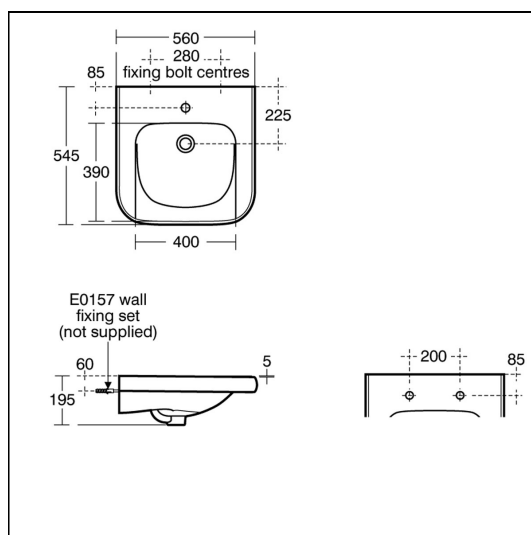

### FEATURES

