

Sensorflow 21 Panel Mounted Cast Spout, Integral Sensor, Mains

ILLUSTRATED

A4178 Sensorflow 21 panel mounted 15cm cast spout integral sensor, flexible inlet tail, solenoid valve, combined servicing valve and filter, sensor and solenoid cables, copper tube inlets, mains

ILLUSTRATED PRODUCT DETAILS

Weights

A4178 2.40 KG

Finishes

A4178  Chrome (AA)

Materials

A4178 Chrome Plated Brass

Flow rates

A4178 4.7 Litres per minute @ 3 bar pressure


FINISH OPTIONS

 (AA) Chrome

 (GN) Ultra Steel

Special Notes

All spouts supplied complete with individual solenoid valve, copper tube inlet and combined servicing valve and filter. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Spouts with integral sensors detect hands within the sensing range and the solenoid valve is opened. Automatically shuts off if sensor is obstructed for a maximum of 50 seconds. Mains powered transformer with option to use up to 5 link units per main unit or stand alone battery powered units. Regulated flow rate 4.7 litres per minute.

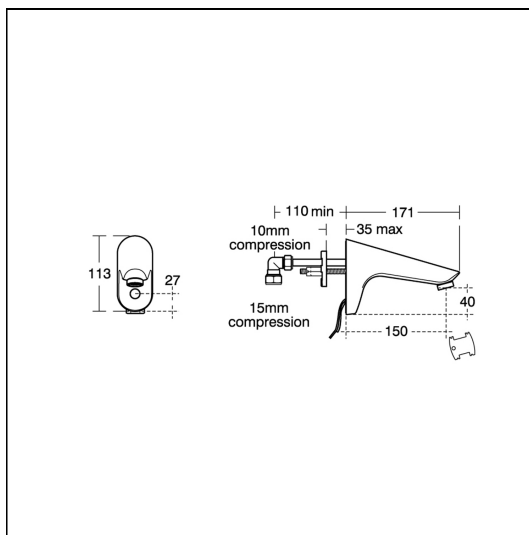

ACCREDITATIONS

A4178(AA)



1212014

FEATURES

