

Markwik 21+ 1 Hole Thermostatic Basin Mixer

ILLUSTRATED

A6696 (TP6) Markwik 21+ 1 hole thermostatic basin mixer, single sequential lever, demountable with copper tails

OPTIONS

A6791 Markwik 21+ deck mounted basin mixer fixing kit (patented design) for use with 1 taphole Contour 21+ back outlet washbasins

EW144 M10 Stainless steel inlet tails - pair

EW145 M10 Stainless steel inlet tails - 5 pairs

ILLUSTRATED PRODUCT DETAILS

Weights

A6696 2.50 KG

Finishes

A6696  Chrome (AA)

Materials

A6696 Chrome Plated Brass

Flow rates


A6696 7.9 Litres per minute @ 3 bar pressure

Standards

HTM 04-01 supplement D08, HBN 00-10, TMV3, WRAS

Special Notes

Minimum 0.6 bar pressure, regulated flow to a maximum of 10 litres per minute. During demounting, integral safety valves will shut off water as a fail safe in case incoming water supplies have not been isolated. Integral isolating valves, strainers, check valves and flow regulators are all accessible from above the basin when the tap is demounted.

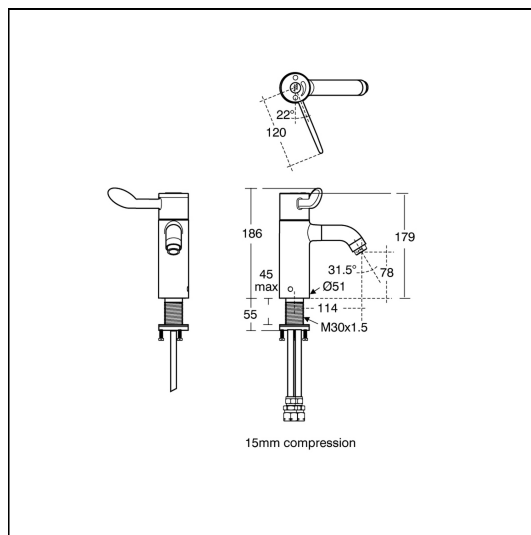

ACCREDITATIONS



FEATURES

