

DSC SHCVO C

DESCENT Shower Range Descent Concealed Dual Control Valve Only



Features

- Rear access to service filters required
- Valve will in 35mm cavity space
- Separate controls for temperature and flow
- Cartridge can be accessed from the front
- Minimum cold water supply temperature is 5°C

Product Certifications:

WRAS Certificate No: 1409055
WRAS Expiry Date: 30/09/2019




Also available from the DESCENT Shower Range is:



Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control Recessed
Valve/Cartridge Type:	35mm Thermostatic Cartridge
Maximum Temperature Setting °C:	42
Maximum Hot Water Temperature: °C	80
Working Pressure Range: (bar)	Min.0.2bar, Max.5.0bar
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally Balanced
Flow Rate: (l/min @ 3 bar)	37.3
Flow Regulator:	Yes - 5lpm & 7lpm
Connection Inlet:	15mm Compression Connections
Connection Outlet:	N/A
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

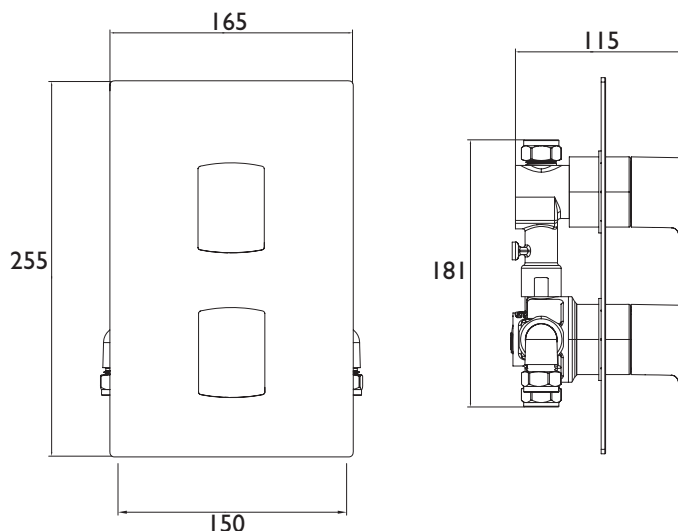

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	7.5	14.1	21	30.5	37.3	48.2

TECHNICAL
DATA
SHEET

BRISTAN
TAPS & SHOWERS D3

