

TECHNICAL DATA SHEET

BRISTAN

COMMERCIAL

Gummers 15mm Thermostatic Mixing Valve


Product Specification

Product Code:	MT503CP
Finishes:	Chrome
Product Type:	Commercial
Maximum Hot Temperature:	80oC
Supply:	Suitable for all plumbing systems, preferably balanced
Inlet Connection:	15mm
Outlet Connection:	15mm
Working Pressures:	Min 0.1 Bar, Max 2.5 Bar



Additional Information

- Recommended for timed flow controls, non-thermostatic showers, electronic controls and non-thermostatic taps
- High pressure bath fill Part G compliant
- Factory pre-set maximum temperature at 43oC
- Automatic shut-off in the event of hot or cold water supply failure
- Check valves, and serviceable filters and flat faced inlet connections as standard
- Operates at a maximum pressure differential of 10:1
- Ideal in Education, Healthcare or Sports & Leisure environments

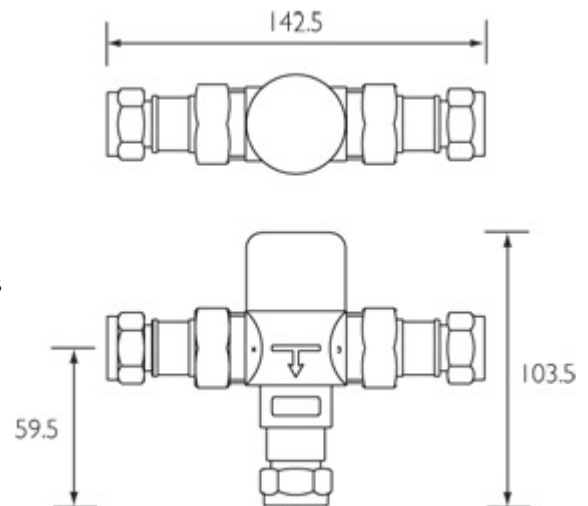

Flow Rates (litres per minute)

System Pressure	0.1bar	0.2bar	0.4bar	0.8bar	1.0bar	1.5bar	2.5bar
Open Outlet	5.9	9.8	14.7	21.3	23.8	30.5	35

Compliance / Approvals

WRAS Approval No:	1210009
TMV3 Certificate No:	BC1090-1212
TMV3 Designations:	HP-S, HP-W, HP-T44, LP-W and LP-S
TMV2 Certificate No:	BC1089-1212
TMV2 Designations:	HP-B, HP-W, HP-T, HP-S, LP-B, LP-W and LP-S
Complies with NHS D08 Specifications	
Complies with BS EN 1111:1999 & BS EN 1287:1999 standards	

Technical Advice: For further information please call 0844 7016273
or email customercare@bristan.com

Guarantee: 1 year covering manufacturing faults.

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.