

CL FMBF C

CHILL Tap Range Chill Floor Mounted Bath Filler Chrome



Features:

- Brass construction
- Ceramic disc cartridge for smooth temperature and flow control
- Operates at a minimum pressure of 1.5 bar
- Flexible tails included
- Metal fixing nut for added durability

Product Certifications:


For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Product Type:	Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Single Lever
Connection Inlet:	Flexi tails with 15mm compression ends
Connection Outlet:	N/A
Number of Tap Holes:	1
Valve/Cartridge Type:	40mm Ceramic Disc Cartridge
Plumbing System Requirements:	All, Preferably Balanced
Working Pressure Range:	Min. 1.5 bar, Max. 5.0 bar
Maximum Hot Water Temperature: °C	65
Maximum Dynamic Pressure: (bar)	5
Maximum Static Pressure: (bar)	10
Flow Type:	Single
Flow Rate: (l/min @ 3 bar)	21.6
Isolation Included:	No

Dimensions (measurements in mm)

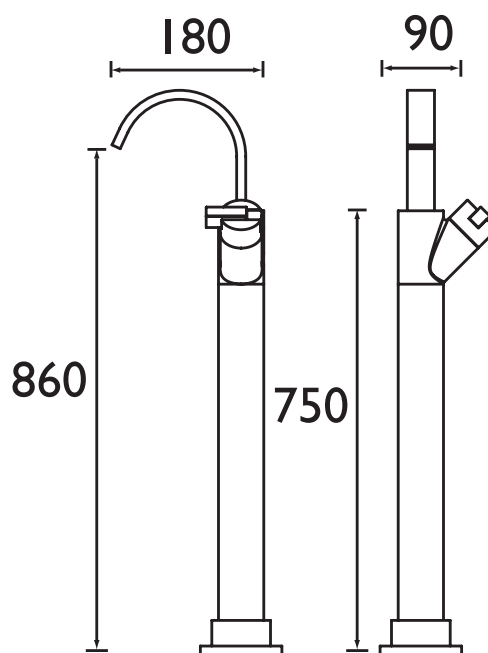

Flow Rates (l/min)

System Pressure (bar)	1.5	2	3	4	5
CL FMBF C	15.1	17.5	21.6	25.1	28.1

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS
D6