

CL 2HBF C

CHILL Tap Range

Chill 2 Hole Bath Filler
Chrome



Features:

- Brass construction
- Ceramic disc cartridge for smooth temperature and flow control
- Flexible tails included
- Metal fixing nut for added durability
- Can be used with Chill mounting plate (CL PL2HBF C)

Product Certifications:


For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Product Type:	Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Single Lever
Connection Inlet:	Screw-in copper pipes with 15mm ends
Connection Outlet:	N/A
Number of Tap Holes:	2
Valve/Cartridge Type:	45mm Ceramic Cartridge
Plumbing System Requirements:	All, Ideally Balanced
Working Pressure Range:	Min. 0.5 bar, Max. 5.0 bar
Maximum Hot Water Temperature: °C	65
Maximum Dynamic Pressure: (bar)	5
Maximum Static Pressure: (bar)	10
Flow Type:	Single
Flow Rate: (l/min @ 3 bar)	30.4
Isolation Included:	No

Dimensions (measurements in mm)

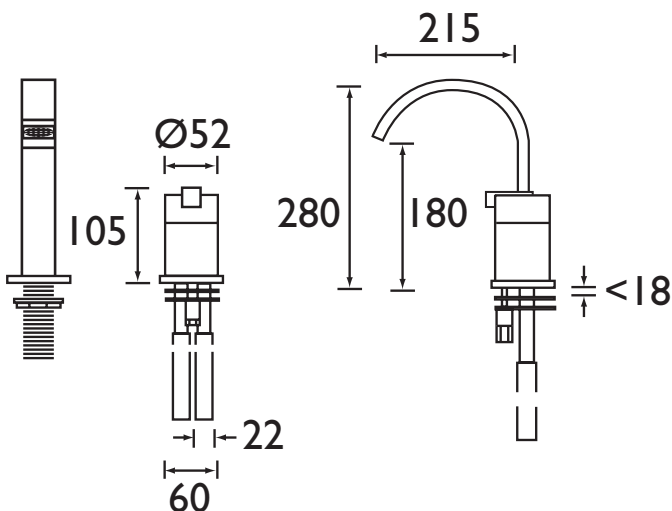

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
CL 2HBF C	11.3	16.9	24.4	30.4	39

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D8