

PIVOT

Recessed Thermostatic Dual Control Shower Valve
with Integral Two Outlet Diverter & Stopcock


Product Specification

Product Code:	PIV SHC3DIV C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Supply:	Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections:	15mm Compression connections
Working Pressures:	Min 0.2 Bar, Max 5.0 Bar



Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min from diverter, 9 l/min from stopcock. 12l/min from both outlet together
- Requires rear access to service the filters
- Cartridge can be accessed from front

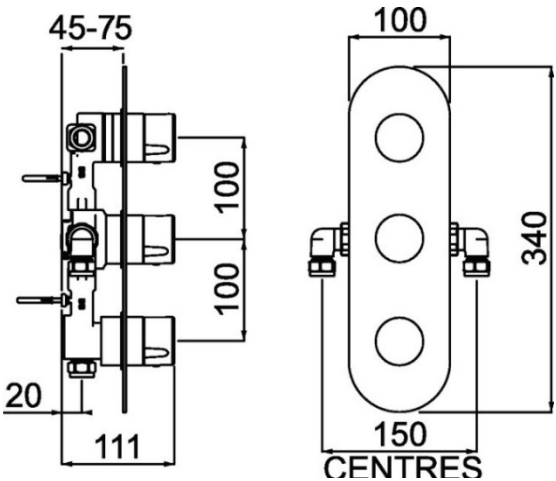

Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1 (CD Valve)	9.48	15	21.2	30	36.72	47.41
Outlet 2 (Diverter)	8.27	13.08	18.5	26.16	32.04	41.37
Outlet 3 (Diverter)	8.05	12.73	18	25.46	31.18	40.25

Compliance / Approvals

WRAS Approval No: 1507041

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee: 5 years covering manufacturing faults.

