

ARTISAN

Thermostatic Exposed Bar Shower with Adjustable Riser Kit, Single-Function Handset & Fast-Fit Connections


Product Specification

Product Code:	AR2 SHXSMFF C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of Brass Construction
Valve Type:	¼ Turn ½" Ceramic Disc Valve
Cartridge Type:	Thermostatic Cartridge
Supply:	Suitable for all plumbing systems, preferably balanced
Inlet Connection:	15mm Compression Connections
Outlet Connection:	G ½"
Working Pressures:	Min 0.1 Bar, Max 5.0 Bar
Dimensions for Fitting:	150mm inlet centres



Additional Information

- Dual control – Flow and temperature are controlled separately, giving accurate control of both
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of any injury
- Factory set to a maximum of 38°C to eliminate the ability to select an unsafe temperature – this is adjustable to suit user preference and up to a maximum of 46°C.
- Utilises unique fast fit system – wall mount WMNT10 C
- Supplied with 1.5m hose, riser rail, hose retainer and a single function rub clean handset.
- Riser rail brackets can be adjust up and down the rail to cover any existing holes or cover tile joints.
- Chrome plated to BS EN 248
- Product supplied with 2 x 7 litre per minute flow regulators

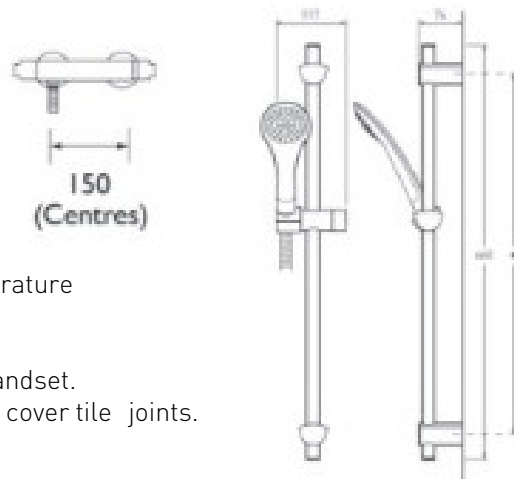

Flow Rates (litres per minute)


System Pressure (bar)	0.2	0.5	1.0	2.0	3.0	4.0	5.0
Open Outlet Without Flow Regulators fitted	5	9.4	14.2	20.82	25.5	29.45	33.2
Open Outlet With Flow Regulators fitted	--	10	14	14	14	14	14
Through Handset With Flow Regulators fitted	--	5.5	8.3	12	14	14	14

Technical Advice:

For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee:

5 years covering manufacturing faults.

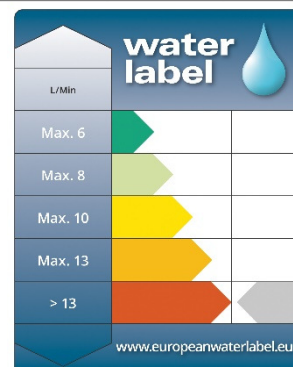

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.