

# TECHNICAL DATA SHEET



## ARTISAN

### Thermostatic Surface Mounted Bar Shower Valve with Fast Fit Connections




#### Product Specification

Product Code:	AR2 SHXVOFF C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Bodies are of all brass construction and is designed to conform to BS EN 1111 and BS EN 1287
Valve Type:	¼ Turn ½" Ceramic Disc Valve
Cartridge Type:	Thermostatic
Supply:	Suitable for all plumbing systems (preferably balanced)
Inlet Connections:	15mm Compression Connections
Outlet Connections:	G ½
Working Pressures:	Min 0.1 Bar Max 5.0 Bar
Dimensions for Fitting:	150mm Inlet Centres

#### Additional Information

- Shower supplied as valve only and thus can be customised by choosing accessories from our Pick 'N' Mix showering options.  
Please see our website or Product and Price Guide for details.
- Dual control – Flow and temperature are controlled separately giving accurate control of both
- Thermostatic cartridge maintains showering temperature to +/- 1°C giving a stable outlet temperature
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of any injury
- Factory set to 38°C to eliminate the ability to select unsafe temperature, this is adjustable to suit user preference up to a maximum of 46°C
- Utilises Fast fit system with WMNT10 C wall mount
- Chrome plated to BS EN 248
- Supplied with 2x 7 l/pm Flow Regulators

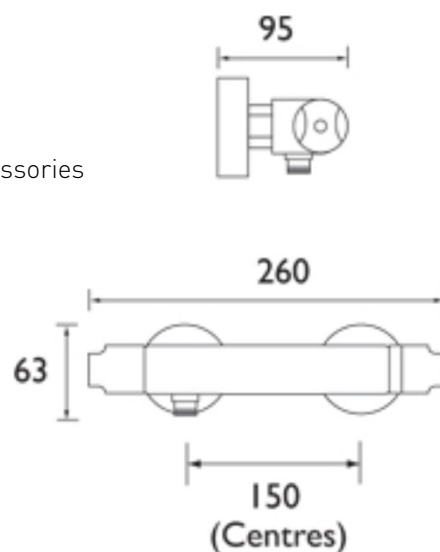

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

# TECHNICAL DATA SHEET



## ARTISAN

### Thermostatic Surface Mounted Bar Shower Valve with Fast Fit Connections




### Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Open Outlet without Flow Regulators	6.6	10.8	15.3	17.72	21.7	34.3
Open Outlet with Flow Regulators	---	10	14	14	14	14
Through Handset with Flow Regulators	---	5.5	8.3	11.74	14	14


### Compliance / Approvals

WRAS Approval No: 1505023  
TMV2 Approval No: BC1638/1115  
TMV2 Designations: HP-S and LP-S

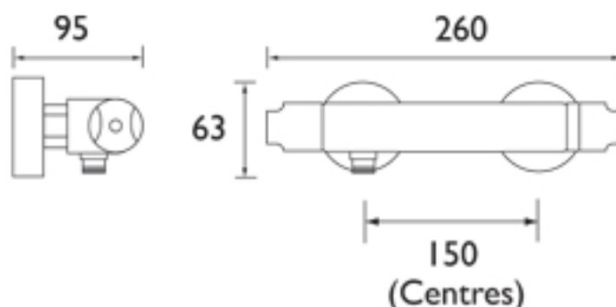

Technical Advice: For further information please call 0844 7016273  
or email [customercare@bristan.com](mailto:customercare@bristan.com).

Guarantee: 5 years covering manufacturing faults

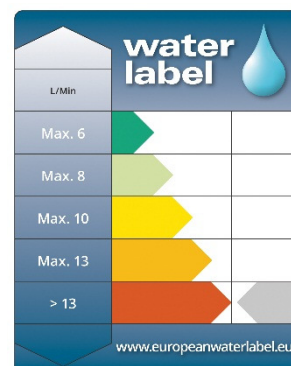

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.