

HOU 5HBSM C

HOURLASS Tap Range Hourglass 5 Hole Bath Shower Mixer Chrome



Features:

- Long life and easy to use ¼ turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose and rub-clean anti-limescale handset
- Minimum working pressure of 0.4 bar

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bath Shower Mixer
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	½" BSP
Connection Outlet:	Anti-Splash
Number of Tap Holes:	5
Valve/Cartridge Type:	¼ Turn ½" Ceramic Disc Valves
Plumbing System Requirements:	Nominally equal (balanced) inlet supply
Working Pressure Range:	Min 0.4 Bar, Max 5.0 Bar
Maximum Hot Water Temperature: °C	65
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

Dimensions (measurements in mm)

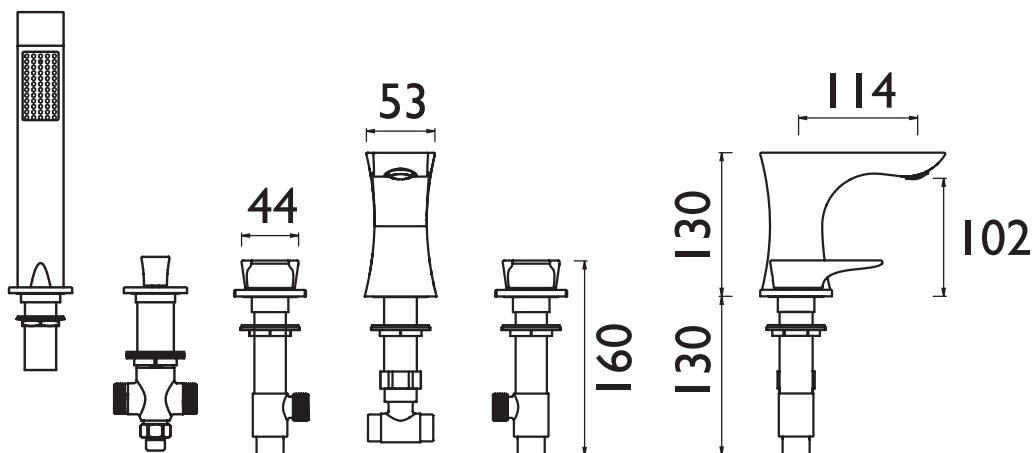

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
HOU 5HBSM C	12.4	21.3	30.8		54.2	69.97

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS
D2