

TECHNICAL DATA SHEET

BRIGHT

Thermostatic Recessed Three Control Shower Valve with Stopcock & Two outlet Diverter

Product Specification

Product Code:	BRG SHC3DIV C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Supply:	Suitable for all plumbing conditions, preferably balanced.
Inlet Connections:	15mm Compression connections
Working Pressures:	Working pressures 0.2-5.0 Bar

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min from diverter, 9 l/min from stopcock. 12l/min from both outlet together
- The inlet hot water temperature must be at least 10% above the required blend temperature.
- Requires rear access to service the filters
- Cartridge can be accessed from front

Flow Rates (litres per minute)


System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
BRG SHC3DIV C - Outlet 1 (CD Valve)	8.3	14.5	21.2	29.98	36.72	47.4
BRG SHC3DIV C - Outlet 2 (Diverter)	6.7	12.4	18.5	26.16	32.04	41.37
BRG SHC3DIV C - Outlet 3 (Diverter)	6.6	12.1	18	25.46	31.18	40.25

Compliance/Approvals

WRAS Certificate No: 1507041

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

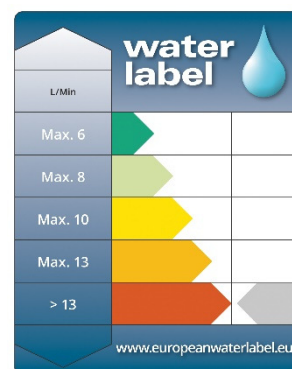

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.