

# TFP3003

## Commercial Shower Range

### Fixed Temperature Timed Flow Shower Panel & VR Head



#### Specification

Main Construction Material:	Steel
No of Controls:	2
Shower Type:	Shower Panel
Shower Head Type:	Fixed Head
Valve/Cartridge Type:	Timed Flow
Maximum Hot Water Supply Temperature °C:	80
Maximum Static Pressure: (bar)	10
Working Pressure Range:	Min. 0.5 Bar, Max. 5.0 Bar
Connection Inlet:	15mm Copper Tails
Isolation Valve Included:	No
Check Valve Included:	Yes

#### Features:

- Integral thermostatic valve reduces deadleg and risk of legionella
- Water economy push button operation with timed flow
- Vandal resistant showerhead with adjustable spray trajectory
- Fits to ceiling, leaving no exposed pipework
- Automatic thermostatic shutoff in the event of hot or cold water failure

#### Product Certifications:



WRAS Certificate Number: 1605045

WRAS Expiry Date: 30/05/2021



TMV Certificate Number: BC 1577/1015

TMV Expiry Date: 01/10/2020

Designations: High Pressure Shower Economy  
Low Pressure Shower Economy




For more products, visit our website:

<http://www.bristan.com>



#### Dimensions (measurements in mm)

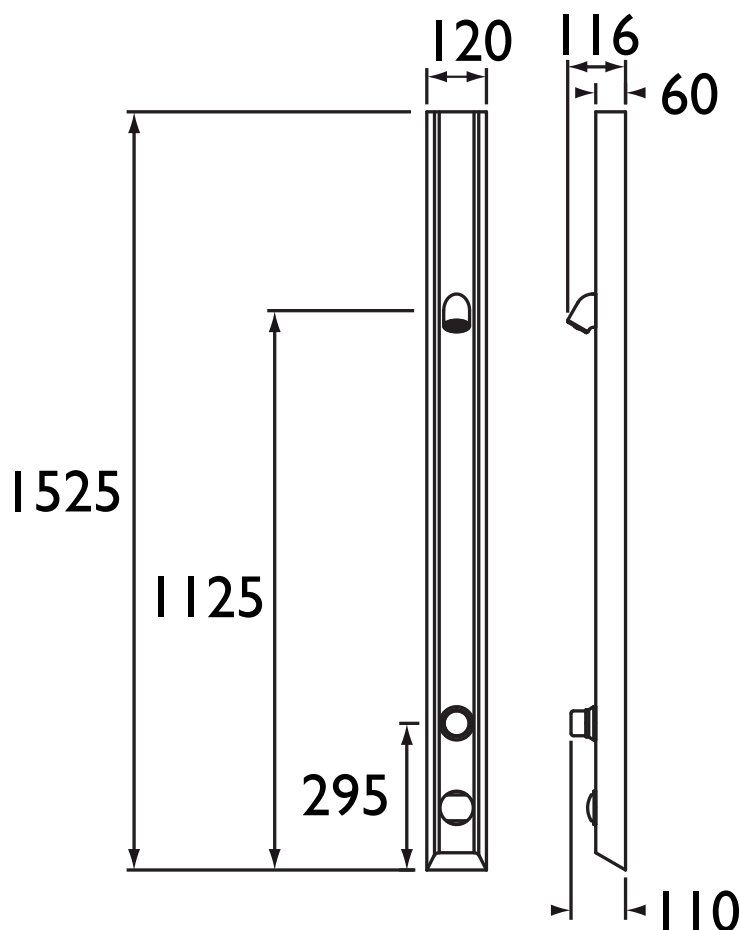

#### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)		6	8	8.2	8.4	8.5

## TECHNICAL DATA SHEET



# BRISTAN

TAPS & SHOWERS

D4