

OP THBF WML C

OPAC Tap Range Opac Thermostatic Dual Control Wall Mount Bath Filler with Chrome Levers



Features:

- Cool touch body for ultimate user safety
- Easy to use dual lever controls
- Integral isolator and easy clean filters
- Automatic thermostatic shutoff in the event of hot or cold water failure
- Pre-set maximum temperature at 38°C which can be overridden

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Wall
Handle Type:	Lever
Connection Inlet:	3/4" BSP
Connection Outlet:	1/2" BSP
Number of Tap Holes:	2
Valve/Cartridge Type:	Thermostatic
Plumbing System Requirements:	All - Ideally balanced
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Maximum Hot Water Temperature: °C	80
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

Dimensions (measurements in mm)

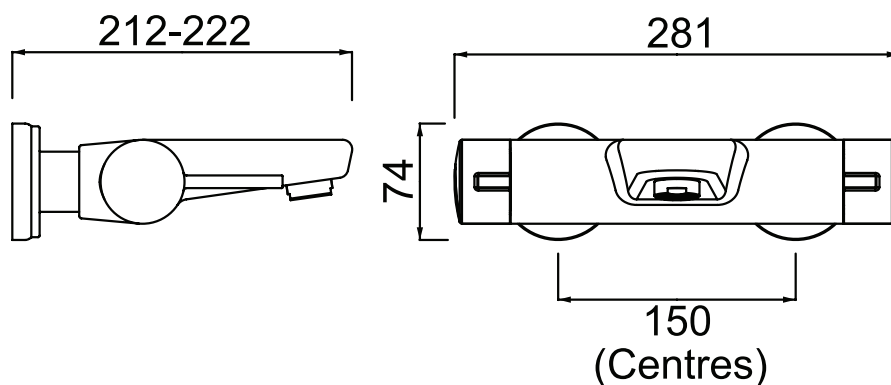

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
OP THBF WML C	9.4	14.9	21	30	38	49.1

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS
D6