

EXD SHC3STP C Exodus Recessed Thermostatic Dual Control Shower Valve With Integral Twin Stopcocks Chrome



Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C

Product Certifications:



WRAS Cert. Number: 2007908
WRAS Expiry Date: 31/08/2025




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	00 Chrome Plated
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Recessed Dual Control
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic
Minimum Dynamic Pressure:	0.2 bar
Maximum Dynamic Pressure:	5.0 bar
Maximum Static Pressure: (bar)	10
Maximum Hot Water Supply Temperature °C:	80
Pre-set Outlet Temperature °C:	43
Plumbing System Suitability:	Suitable for all plumbing systems
Connection Inlet:	15mm Compression
Connection Outlet:	Open
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

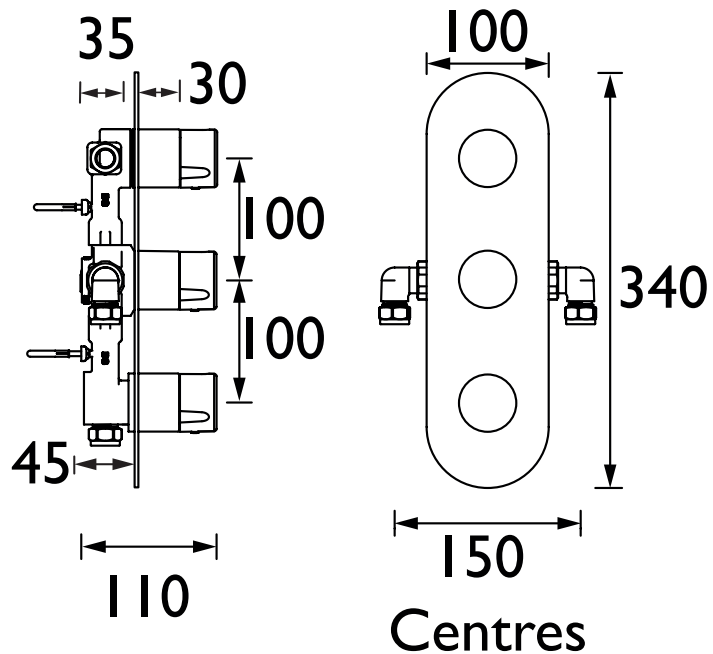

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	9.2	14.6	20.7	29.2	35.8	46.2
Outlet 2	9.3	14.7	20	29.4	36	46.5

TECHNICAL DATA SHEET



BRISTAN

D2