DESCENT SHWR PK2



Features:

- This chunky shower pack contains our Descent shower valve with integral two outlet diverter. It has a 250mm square slimline fixed head with shower arm; a single function handset and hose with integral handset holder and wall outlet.
- The shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Dual control flow and temperature are controlled separately
- Fully serviceable from the front
- 15mm inlet connections

Product Certifications: 8.6 l/min


For more products, visit our website: http://www.bristan.com

略思	Flow Rates (I/min)									
	System Pressure (bar)	0.2	0.5	1	2	3	5			
	Through Handset (mixed)	2.1	3.3	4.7	6.6	8.1	10.5			
210.464	Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1			

TECHNICAL

Specification					
Finish/Colour:	Chrome Plated				
Main Construction Material:	Brass; ABS				
No of Controls:	2				
Shower Type:	Dual Control				
Shower Head Type:	Both				
Shower Kit:	Fixed Head				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn				
Maximum Hot Water Supply Temperature ^o C:	65				
Plumbing System Suitability:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2				
Maximum Dynamic Pressure (bar):	5				
Maximum Static Pressure (bar):	10				
Connection Inlet:	15mm Compression				
Connection Outlet:	G 1/2"				
Isolation Valve Included:	No				
Check Valve Included:	Yes				

Dimensions (measurements in mm)

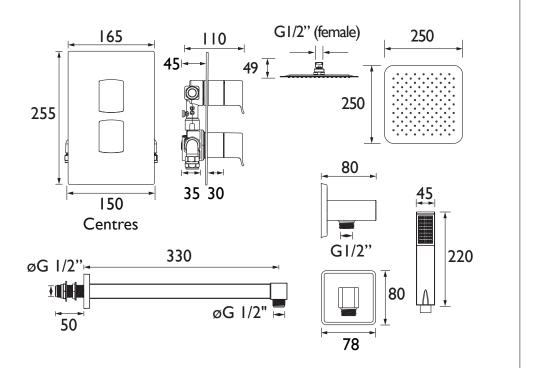

Flow Rates (I/min)									
System Pressure (bar)	0.2	0.5	1	2	3	5			
Through Handset (mixed)		3.3	4.7	6.6	8.1	10.5			
Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1			



D2

irch Coppice Busi ness Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com * - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.