APR PULLSNK C

APRICOT Tap Range Apricot Monobloc Sink Mixer with Pull Out Spray Chrome



Features:

- Metal fixing nut for added durability
- Minimum working pressure of 1.5 bar
- Product supplied with two check valves
- Single lever control with smooth turning, long life ceramic cartridge for added durability and ease of use

Product Certifications:


Water Label




For more products, visit our website: http://www.bristan.com



| Specification | | | | |
|-----------------------------------|------------------------------------|--|--|--|
| Product Type: | Kitchen Taps | | | |
| Main Construction Material: | Brass | | | |
| Mount Type: | Deck Mounted | | | |
| Handle Type: | Lever Handle | | | |
| Connection Inlet: | 1/2" BSP Flexible Tails | | | |
| Connection Outlet: | Spray Handset | | | |
| Number of Tap Holes: | 1 | | | |
| Valve/Cartridge Type: | 35mm Single Lever Cartridge | | | |
| Plumbing System Requirements: | Suitable for high pressure systems | | | |
| Minimum Dynamic Pressure (bar): | 1.5 bar | | | |
| Maximum Dynamic Pressure (bar): | 5.0 bar | | | |
| Maximum Hot Water Temperature °C: | 65°C | | | |
| Maximum Static Pressure (bar): | 10 bar | | | |
| Flow Type: | Dual Flow | | | |
| Isolation Included: | No | | | |



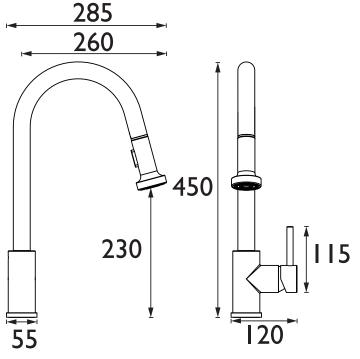

| Flow Rates (I/min) | | | | | | | |
|-----------------------|-----|-----|-----|-----|------|--|--|
| System Pressure (bar) | 1.5 | 2 | 3 | 4 | 5 | | |
| APR PULLSNK C (mixed) | 5.5 | 6.4 | 7.8 | 9.1 | 10.1 | | |

TECHNICAL DATA SHEET



