DSC WMBAS C

DESCENT Tap Range Descent Wall Mounted Basin Mixer Chrome



Long life and easy to use 1/4 turn ceramic disc valves

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Wall Mounted			
Handle Type:	Lever Handles			
Connection Inlet:	15mm Compression Threaded Tail			
Connection Outlet:	M24 Anti-Splash			
Number of Tap Holes:	3			
Valve/Cartridge Type:	1/2" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

Dimensions (measurements in mm)

Product Certifications:

Brass construction

Features:


1/2" Valve

回燈回

http://www.bristan.com

\$38.4 l/min

For more products, visit our website:

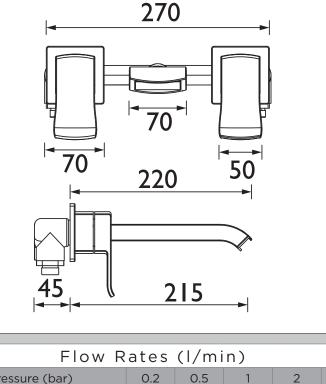

高麗	Flow Rates (I/min)							
	System Pressure (bar)	0.2	0.5	1	2	3	5	
	DSC WMBAS C (mixed)	9.9	15.7	22.2	31.4	38.4	49.6	
TECHNICAL DATA SHEET	P QUALIA S S S S S S S S S S S S S S S S S S S		B	RIS	ST/	AN	D3	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.