


Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Crosshead				
Connection Inlet:	1/2" BSP				
Connection Outlet:	Flow Straightener				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/2" Compression Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Isolation Included:	No				



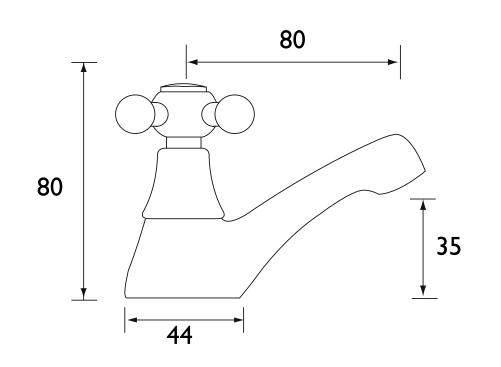

D8

	Flow Rates (I/min)							
にお外的	System Pressure (bar)	0.2	0.5	1	2	3	5	
	R 1/2 C (Cold)	7.5	11.9	16.9	23.8	29.2	37.7	
	R 1/2 C (Hot)	7.5	11.9	16.9	23.8	29.2	37.7	
TECHNICAL DATA SHEET	VEARS LO YEARS LO YEARS LO YEARS LO YEARS LO YEARS LO		B	RIS	57	AN		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

## **Product Certifications:**

Chrome plated to BS EN 248



Features:

•

WRAS Certificate No: 2012917 WRAS Expiry Date: 31/12/2025

For more products, visit our website: http://www.bristan.com

\$58.4 l/min