## NERO Tap Range Nero Bath Shower Mixer Chrome


# NR BSM C



#### Features:


- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- Easy to use lever handles

#### Product Certifications:

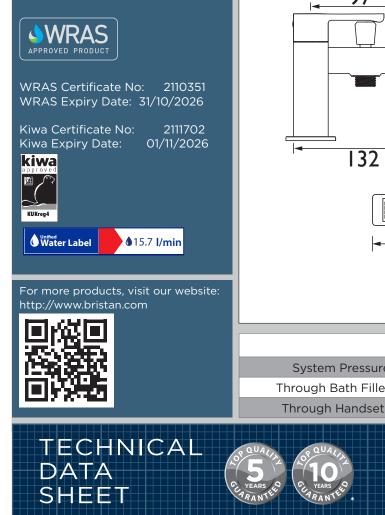

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M28 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4 Ceramic Disc Valve 1/4 Turn			
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

### Dimensions (measurements in mm)

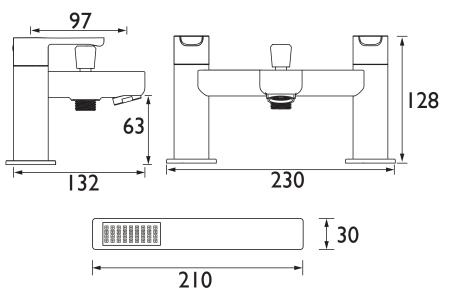

	Flow Rates (I/min)							
<b>住教教授</b>	System Pressure (bar)	0.2	0.5	1	2	3	5	
	Through Bath Filler (mixed)	22.2	35.1	49.6	70.1	85.9	110.9	
	Through Handset (mixed)	4.1	6.4	9.1	12.8	15.7	20.3	
TECHNICAL DATA SHEET	or QUALIA Search or QUALIA YEARS to OR YEARS TO OR YEARS TO OR YEARS		B	RIS	ST/	AN	D9	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.