TS4753ECP

GUM Shower Range 22mm Thermostatic Mixing Valve



Features:

- Ideal for group applications at pressures as low as 0.1 bar
- Temperature control can be locked in position or allow adjustment
- Automatic shut-off in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard
- Operates at a maximum pressure differential of 10:1

Product Certifications:



WRAS Cert. Number: 2104911 WRAS Expiry Date: 30/04/2026




TMV3 Cert. No.: NSF2259/0920 TMV3 Expiry Date: 11/09/2025


For more products, visit our website: <u>http://www.bristan.com</u>



Specification					
Style:	Utility				
Finish/Colour:	Chrome				
Main Construction Material:	Brass				
No of Controls:	1				
Shower Type:	Thermostatic Mixing				
Shower Head Type:	N/A				
Valve/Cartridge Type:	Thermostatic				
Maximum Hot Water Supply Temperature ^o C:	80				
Maximum Static Pressure: (bar)	10				
Plumbing System Suitability:	All - Ideally Balanced				
Working Pressure Range:	Min. 0.1 Bar - Max. 5.0 Bar				
Connection Inlet:	22mm				
Connection Outlet:	22mm				
Check Valve Included:	Yes				

Dimensions (measurements in mm)

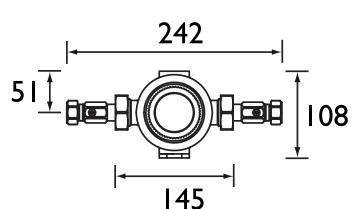



	Flow Rates (I/min)									
	System Pressure (bar)	0.2	0.5	1	2	3	5			
-	Through Handset (mixed)	19	33	47	66	81	105			



BRISTAN

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.