PM SHXMMCTFF C

PRISM Shower Range Prism Safe Touch Bar Mixer with Adjustable Riser Rail, Multi Mode Handset and Fast Fit Wall Fixings



Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-ridden to a maximum of 46°C
- TMV2 thermostatic control for a higher level of performance and protection
- Unique Safe Touch technology ensures the valves stays cool to the touch while in use
 Dual control - flow and
- Dual control flow and temperature are controlled separately
- Supplied with our wallmount 12 fixing kit. The simplest solution for installing, maintaining and replacing bar showers, using built in front-of-wall isolation valves

Specify As:

Prism Thermostatic TMV2 Exposed Cool Touch Bar Valve with Adjustable Riser Kit, Peg Handles, Multi Function Handset and Fast Fit Connections.

Product Certifications:



 IMV2 Cert No:
 NSF2262/0720


 TMV2 Expiry Date:
 16/07/2025

Water Label



Specification						
Product Type:	Bar Shower					
Main Construction Material:	Brass					
Connection Outlet:	G 1/2"					
Connection Inlet:	15mm Compression					
Number of Controls:	2					
Flow Control Valve Type:	3/4" Ceramic Disc Valve					
Plumbing System:	Suitable for all plumbing systems					
Minimum Dynamic Pressure:	0.2 Bar					
Maximum Dynamic Pressure:	5.0 Bar					
Maximum Static Pressure:	10					
Maximum Hot Water Temperature: (°C)	60					
Pre-set Outlet Temperature: (°C)	38°C					
Isolation Included:	Yes					
Check Valve Supplied:	Yes					
Shower Kit:	Adjustable Riser Kit					

Dimensions (measurements in mm)

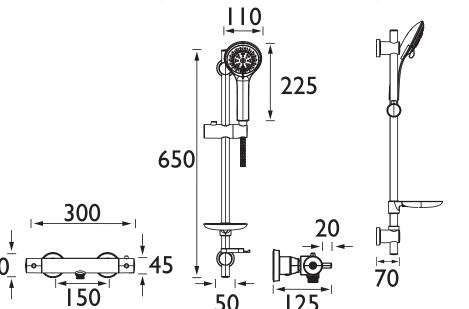

	Flow Rates (I/min)								
2	System Pressure (bar)	0.2	0.5	1	2	3	5		
	Through Handset (mixed)	2.1	4	6.2	8.9	11	13		

For more products, visit our website: <u>http://www.bristan.com</u>





Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.