

# VR SHXDIVFF C

## VERTICO Shower Range

Vertico Thermostatic Exposed Bar Valve with Rigid Riser and Integral Diverter to Handset



### Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- Dual control - flow and temperature are controlled separately
- Automatic shut-off in the event of hot or cold water supply failure
- Supplied with a wall mount 12 fixing kit for easier first fit


### Product Certifications:



WRAS Certificate No.: 2203903  
WRAS Expiry Date: 31/03/2027




For more products, visit our website:  
<http://www.bristan.com>



### Specification

|  |   |
|--|---|
| Style:                                   | Contemporary  |
| Finish/Colour:                           | Chrome  |
| Main Construction Material:              | Brass   |
| No of Controls:                          | 2   |
| Shower Type:                             | Bar Shower  |
| Shower Head Type:                        | Rigid Riser with Diverter                           |
| Valve/Cartridge Type:                    | 30mm Single Lever Cartridge                         |
| Maximum Hot Water Supply Temperature °C: | 80  |
| Maximum Static Pressure: (bar)           | 10  |
| Plumbing System Suitability:             | Suitable for all plumbing systems, ideally balanced |
| Working Pressure Range:                  | Min. 0.5 Bar - Max. 5.0 Bar                         |
| Connection Inlet:                        | 15mm Compression                                    |
| Connection Outlet:                       | G1/2" & Riser Outlet                                |
| Isolation Valve Included:                | Yes   |
| Check Valve Included:                    | Yes   |

### Dimensions (measurements in mm)

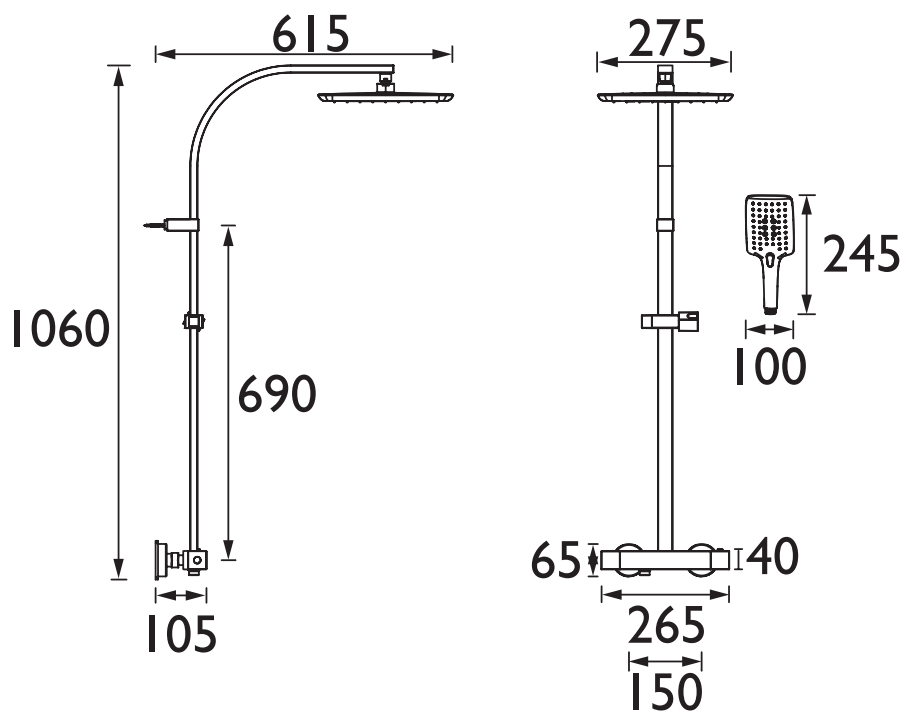

### Flow Rates (l/min)

| System Pressure (bar)      | 0.5 | 1   | 2    | 3    | 5    |
|----------------------------|-----|-----|------|------|------|
| Through Handset (mixed)    | 3.3 | 5   | 7.1  | 8.8  | 11.6 |
| Through Fixed Head (mixed) | 5   | 7.4 | 10.9 | 13.4 | 17.3 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D6