


# AR3 SHCVO C

## ARTISAN Shower Range

Artisan Recessed Thermostatic Dual Control Shower Valve Chrome

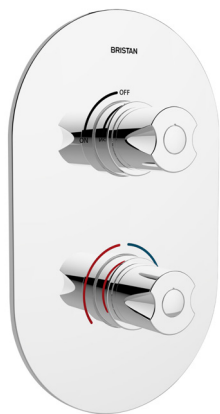

### Features:


- 15mm inlet connections
- Easy installation with an adjustable faceplate that fits total wall depths from 45mm to 75mm for a perfect flush finish
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 60°C

### Product Certifications:



WRAS Certificate No: 2405900  
WRAS Expiry Date: 31/05/2029


For more products, visit our website:  
<http://www.bristan.com>



### Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Recessed Dual Control
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression connections
Connection Outlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

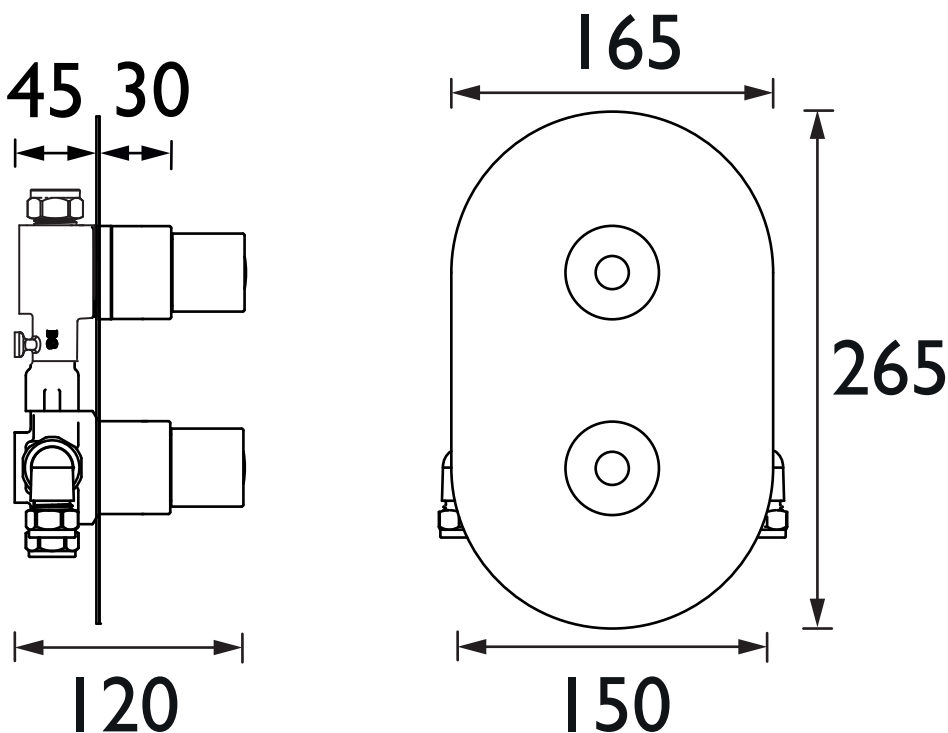

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	7.5	14.1	21	30.5	37.3	48.2

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D9