COBALT SHWR PK

COBALT Shower Range

Complete Cobalt Recessed
Dual Control Shower Pack



Features:

- This shower pack has soft square handles on our Colbalt shower valve with integral two outlet diverter. It has a 200mm square fixed head with shower arm; and an adjustable riser shower kit with a single function handset.
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish
- Dual control flow and temperature are controlled separately
- Cartridge can be accessed from the front, Requires rear access to service filters
- Wall outlet designed with Bristan's Wall Mounted Technology for easier installation


Product Certifications:



For more products, visit our website: http://www.bristan.com



| Specification | | | | | |
|--|-----------------------------------|--|--|--|--|
| Finish/Colour: | Chrome Plated | | | | |
| Main Construction Material: | Brass; ABS | | | | |
| No of Controls: | 2 | | | | |
| Shower Type: | Recessed Dual Control | | | | |
| Shower Head Type: | Both | | | | |
| Shower Kit: | Adjustable riser with Fixed Head | | | | |
| Valve/Cartridge Type: | 35mm Thermostatic Cartridge | | | | |
| Maximum Hot Water Supply Temperature °C: | 65 | | | | |
| Plumbing System Suitability: | Suitable for all plumbing systems | | | | |
| Minimum Dynamic Pressure (bar): | 0.2 | | | | |
| Maximum Dynamic Pressure (bar): | 5.0 | | | | |
| Maximum Static Pressure (bar): | 10 | | | | |
| Connection Inlet: | 15mm Compression | | | | |
| Connection Outlet: | G 1/2" | | | | |
| Isolation Valve Included: | No | | | | |
| Check Valve Included: | Yes | | | | |

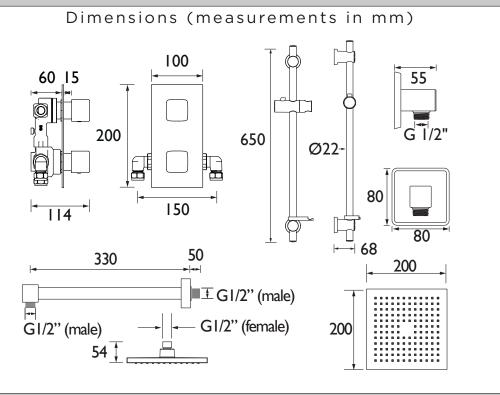

| Flow Rates (I/min) | | | | | | | | |
|-----------------------|-----|------|------|------|------|------|--|--|
| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 | | |
| Outlet 1 | 6.1 | 12.8 | 19 | 27.6 | 33.8 | 43.6 | | |
| Outlet 2 | 6.7 | 12.5 | 18.5 | 27 | 33 | 42.6 | | |

TECHNICAL DATA SHEET



BRISTAN