

KN2 SHXRR C

COLONIAL Shower Range

Colonial2 Thermostatic Shower
Valve with Rigid Riser Chrome



Features:

- TMV2 Rated Only Between 1 bar minimum and 5 Bar Maximum Dynamic Pressure.
- All in one box - pack includes shower valve, rigid riser rail and a fixed head so nothing to buy separately
- Easy installation with adjustable elbow inlets which enable you to use on existing pipework centres between 110mm and 155mm so there's no need for retiling
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- Thermostatic cartridge with preset temperature safety stop at 42°C for family-safe showering.
- Automatic shut-off in the event of hot or cold water supply failure for family safe showering.

Product Certifications:



WRAS Certificate No: 240403011
WRAS Expiry Date: 30/04/2029


TMV2 Certificate No: 2503305
TMV2 Designation: HP-SE
TMV2 Expiry Date: 16/03/2030



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Sequential Mini Valve
Shower Head Type:	Fixed Head
Shower Kit:	Rigid Riser
Valve/Cartridge Type:	Concentric Cartridge
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	All Systems, Ideally Balanced
Minimum Dynamic Pressure (bar):	0.1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

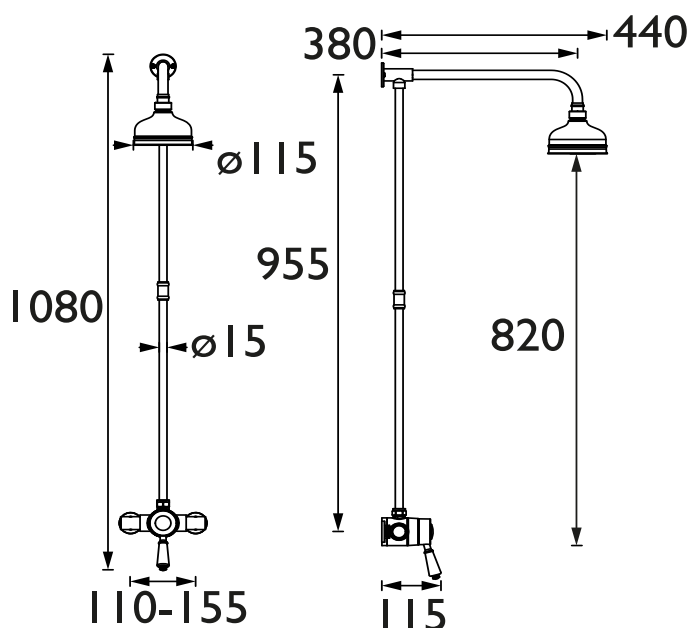

Flow Rates (l/min)

System Pressure (bar)	0.1	0.5	1	2	3	5
Valve Only (mixed)	7.1	15.8	22.3	31.6	38.7	50
Through Fixed Head (mixed)	1.4	3.1	4.3	6.1	7.5	9.7
With Flow Limiters (mixed)	1.4	3.1	4.3	6.1	7.5	9.7

TECHNICAL
DATA
SHEET



BRISTAN

D12

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.