

MINI2 TS1203 EL C COMMERCIAL Shower Range

OPAC Thermostatic Exposed Mini Shower Valve with Lever Chrome



Features:

- TMV2 Rated Only Between 1 bar minimum and 5 Bar Maximum Dynamic Pressure
- Single sequential control for both temperature and flow
- Adjustable inlet centres mean you can use existing pipework with centres between 110mm and 155mm
- Automatic shutoff in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard

Product Certifications:




WRAS Certificate No: 240403011
WRAS Expiry Date: 30/04/2029



TMV2 Certificate No: 2503305
TMV2 Designation: HP-SE
TMV2 Expiry Date: 16/03/2030




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Sequential Mini Valve
Shower Head Type:	Valve Only
Shower Kit:	N/A
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	All Systems, Preferably Balanced
Minimum Dynamic Pressure (bar):	0.1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

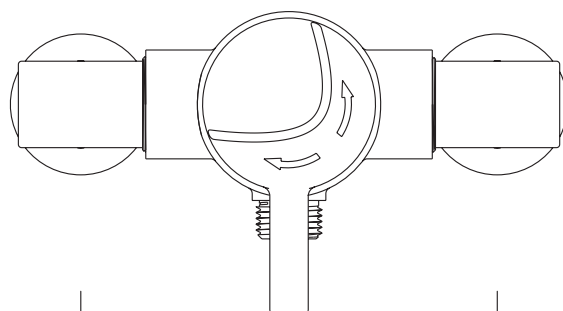

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
Valve Only (mixed)	5.7	7.8	8.8	9.1	9.3

TECHNICAL
DATA
SHEET



BRISTAN

D16