RS2 SHCVO C

RENAISSANCE Shower Range

Renaissance 2 Recessed Thermostatic Dual Control
Shower Valve Chrome



Features:

- 15mm inlet connections
- Fitting depth including plasterboard and tiles is 45mm
 75mm
- Minimum cold water supply temperature is 4°c
- Maximum hot water supply temperature is 80°c
- Easy installation with an adjustable faceplate that fits total wall depths from 45mm to 75mm for a perfect flush finish

Product Certifications:




WRAS Certificate No: 2405900 WRAS Expiry Date: 31/05/2029

For more products, visit our website: http://www.bristan.com



Specification					
Finish/Colour:	Chrome Plated				
Main Construction Material:	Brass				
No of Controls:	2				
Shower Type:	Dual Control				
Shower Head Type:	None				
Valve/Cartridge Type:	Recessed				
Maximum Hot Water Supply Temperature °C:	80				
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.2				
Maximum Dynamic Pressure (bar):	5				
Maximum Static Pressure (bar):	10				
Connection Inlet:	15mm Compression				
Connection Outlet:	G 1/2"				
Isolation Valve Included:	N				
Check Valve Included:	Υ				

Dimensions (measurements in mm)

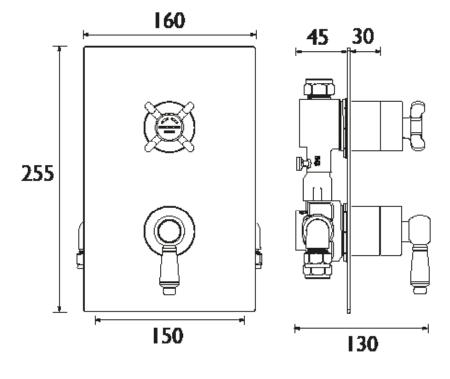

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Valve Only/Largest FR (mixed)	9.4	14.9	21	29.7	36.4	47		

TECHNICAL DATA SHEET



BRISTAN

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

** - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.