


RS2 SHCDIV C

RENAISSANCE Shower Range

Renaissance 2 Recessed Dual Control
Shower With Two Outlet Diverter Chrome

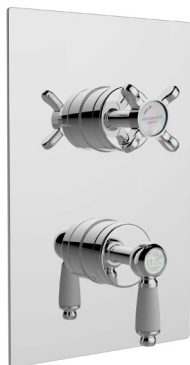

Features:

- 15mm inlet connections
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C
- Easy installation with an adjustable faceplate that fits total wall depths from 50mm to 75mm for a perfect flush finish

Product Certifications:



WRAS Certificate No: 2405900
WRAS Expiry Date: 31/05/2029


For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Traditional
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	Valve Only
Valve/Cartridge Type:	Recessed
Maximum Hot Water Supply Temperature °C:	80°C
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All plumbing systems, ideally balanced
Working Pressure Range:	Min 0.2 bar, Max 5.0 bar
Flow Rate: (l/min @ 3 bar)	32.9
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

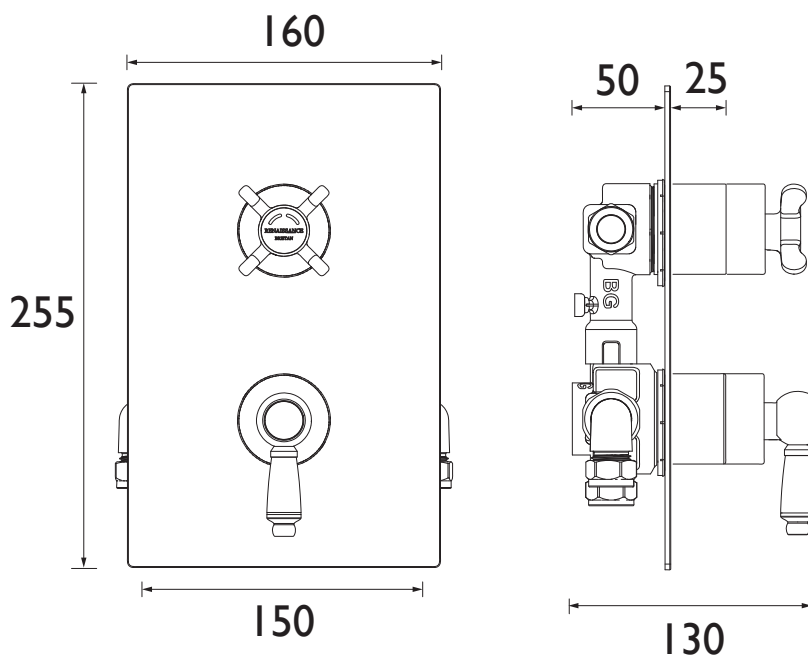

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	8.5	13.4	19	26.9	32.9	42.5
Outlet 2	8.3	13.1	18.5	26.2	32	41.4

TECHNICAL
DATA
SHEET



BRISTAN

D4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.