



Features:

- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish
- Dual control - Flow and temperature are operated separately giving accurate control of both.
- Cartridge can be accessed from the front for easy servicing.
- Metal back plate and handles for added durability.
- Minimum cold water supply temperature is 4°C.

Product Certifications:



WRAS Certificate No: 2005912
WRAS Expiry Date: 31/05/2025


For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--|---|
| Finish/Colour: | Chrome Plated |
| Main Construction Material: | Brass; ABS |
| No of Controls: | 2 |
| Shower Type: | Dual Control |
| Shower Head Type: | None |
| Shower Kit: | N/A |
| Valve/Cartridge Type: | 3/4" Ceramic Disc Valve - 1/4 turn |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Plumbing System Suitability: | Suitable for all plumbing systems, ideally balanced |
| Minimum Dynamic Pressure (bar): | 0.2 |
| Maximum Dynamic Pressure (bar): | 5 |
| Maximum Static Pressure (bar): | 10 |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | G 1/2" |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Dimensions (measurements in mm)

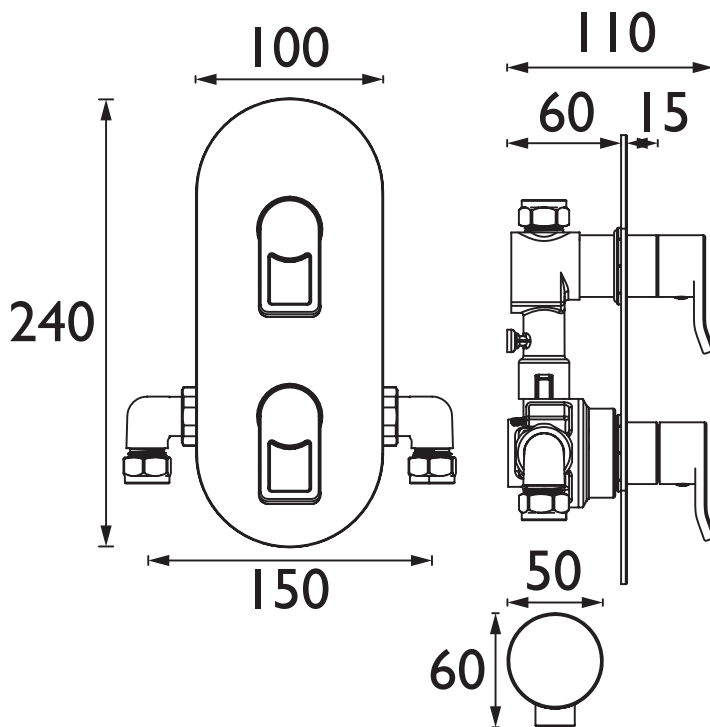

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|------|----|------|------|------|
| Valve Only (mixed) | 7.5 | 14.1 | 21 | 30.5 | 37.4 | 48.2 |

TECHNICAL DATA SHEET



BRISTAN

D2