SOQ3 SHXAR C

SONIQUE Shower Range

Sonique3 Thermostatic Exposed
Shower Valve with Riser Kit Chrome



Features:

- TMV2 Rated Only Between 1 bar minimum and 5 Bar Maximum Dynamic Pressure.
- All in one box pack includes shower valve, hose, hose retainer, riser rail and a rubclean anti-limescale single function handset so nothing to buy separately.
- Easy installation with adjustable elbow inlets which enable you to use on existing pipework centres between 110mm and 155mm so there's no need for retiling.
- Rub-clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability
- Thermostatic cartridge with preset temperature safety stop at 41°C for family-safe showering.

Product Certifications:






WRAS Certificate No: 240403011 WRAS Expiry Date: 30/04/2029 TMV2 Certificate No: 2503305 TMV2 Designation: HP-SE TMV2 Expiry Date: 16/03/2030





Specification					
Finish/Colour:	Chrome Plated				
Main Construction Material:	Brass; ABS; Stainless Steel				
No of Controls:	1				
Shower Type:	Sequential Mini Valve				
Shower Head Type:	Adjustable				
Shower Kit:	Adjustable Riser				
Valve/Cartridge Type:	Sequential Cartridge				
Maximum Hot Water Supply Temperature °C:	60				
Plumbing System Suitability:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2				
Maximum Dynamic Pressure (bar):	5				
Maximum Static Pressure (bar):	10				
Connection Inlet:	15mm Compression				
Connection Outlet:	G 1/2"				
Isolation Valve Included:	No				
Check Valve Included:	Yes				

Dimensions (measurements in mm)

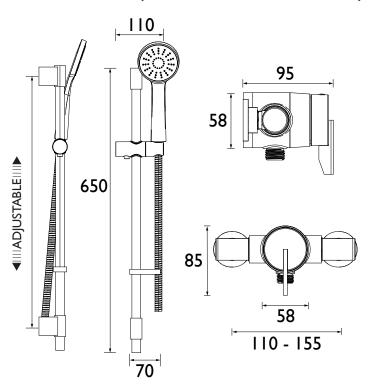

Flow Rates (I/min)						
System Pressure (bar)	1	2	3	4	5	
Through Handset (mixed)	7.6	8.3	8.8	8.8	8.8	

TECHNICAL DATA SHEET



BRISTAN

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com