



### Features:

- 15mm inlet connections
- Fitting depth including plasterboard and tiles is 60mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish


### Product Certifications:



WRAS Cert. Number: 2405900  
WRAS Expiry Date: 31/05/2029




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Mixer Shower
Main Construction Material:	Brass
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Number of Controls:	2
Flow Control Valve Type:	3/4" Ceramic Disc Valve & Thermostatic Cartridge
Plumbing System:	Suitable for all plumbing systems
Minimum Dynamic Pressure: (Bar)	0.2 Bar
Maximum Dynamic Pressure: (Bar)	5.0 Bar
Maximum Static Pressure: (Bar)	10
Maximum Hot Water Temperature: (°C)	80°C
Pre-set Outlet Temperature: (°C)	42°C
Isolation Included:	No
Check Valve Supplied:	Yes
Shower Kit:	Valve Only

### Dimensions (measurements in mm)

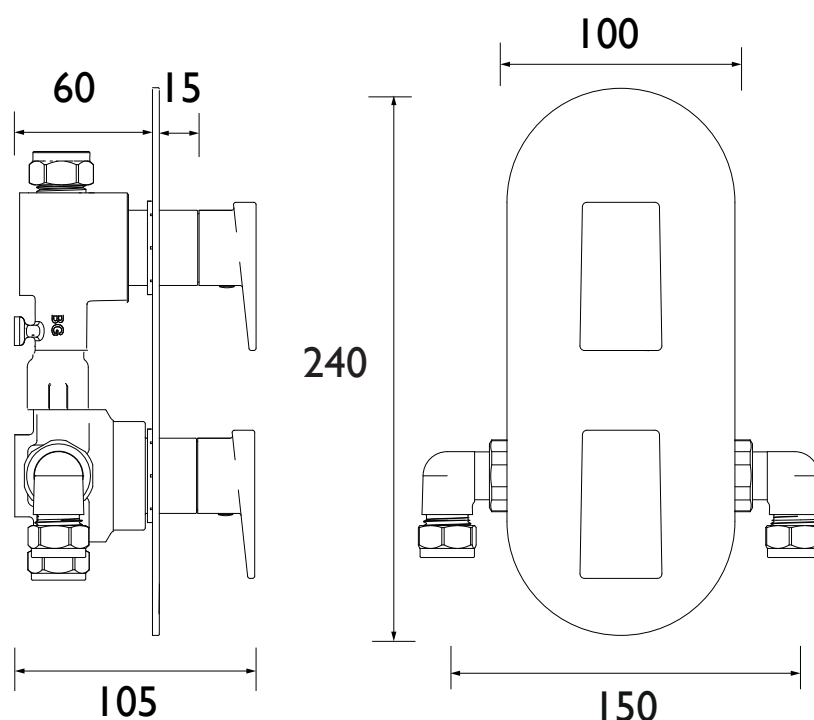

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
SAI SHCVO C	7.5	14.1	21	30.5	37.4	48.2

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D8