

# FRN EFSNK BLK

## FERN Tap Range Fern Easyfit Mono Sink Mixer Black



### Features:

- Install your tap in minutes from above the sink, thanks to the innovative Top Fix Easyfit technology
- Easily repair, maintain or replace your kitchen tap using the two isolation valves that let you shut off the water supply at the base
- Supplied with everything you need for a hassle-free installation, including two Allen keys, isolation valves, Top Fix Easyfit base, and flexi tails
- Rinse and reach with ease using the convenient swivel spout
- Install with confidence, thanks to the high quality metal fixings that keep your tap securely in place

### Product Certifications:




WRAS Certificate No: 240403007  
WRAS Expiry Date: 30/04/2029



### Specification

|                                   |                                                     |
|-----------------------------------|-----------------------------------------------------|
| Product Type:                     | Kitchen Taps                                        |
| Main Construction Material:       | Brass                                               |
| Mount Type:                       | Deck                                                |
| Maximum Worktop Depth (mm):       | 35                                                  |
| Handle Type:                      | Round                                               |
| Connection Inlet:                 | 1/2" BSP Flexible Tails with Isolation Valves       |
| Connection Outlet:                | Housed M22 8lpm Flow Limited Aerator                |
| Number of Tap Holes:              | 1                                                   |
| Valve/Cartridge Type:             | 1/2" Ceramic Disc Valve - 1/4 turn                  |
| Plumbing System Requirements:     | Suitable for all plumbing systems, ideally balanced |
| Minimum Dynamic Pressure (bar):   | 0.3 bar                                             |
| Maximum Dynamic Pressure (bar):   | 5 bar                                               |
| Maximum Hot Water Temperature °C: | 60°C                                                |
| Maximum Static Pressure (bar):    | 10 bar                                              |
| Flow Type:                        | Single                                              |
| Isolation Included:               | Yes                                                 |

### Dimensions (measurements in mm)

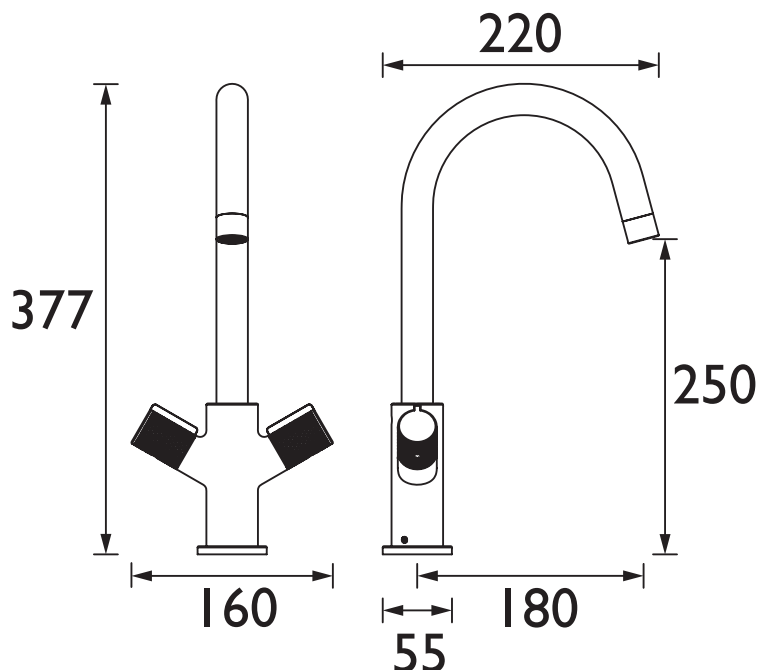

### Flow Rates (l/min)

| System Pressure (bar) | 0.3 | 0.5 | 1   | 2   | 3   | 5   |
|-----------------------|-----|-----|-----|-----|-----|-----|
| FRN EFSNK BLK (mixed) | 2.2 | 4.4 | 6.3 | 8.4 | 8.4 | 8.4 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D3

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.