

AR3 SHCMT C

ARTISAN Shower Range Artisan Recessed Thermostatic Dual Control Shower Valve with Kit Chrome



Features:

- The Artisan chrome dual control concealed valve with adjustable riser combines contemporary bathroom design with clean architectural lines. Separate flow and temperature controls provide reliable performance, while the front-access cartridge design simplifies maintenance.
- Easy installation with an adjustable faceplate that fits total wall depths from 45mm to 75mm for a perfect flush finish
- Effortless fitting with adjustable brackets that reuse existing screw holes
- Save time on maintenance with a front-access cartridge for quick servicing
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 2405900
WRAS Expiry Date: 31/05/2029



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Recessed Dual Control
Shower Head Type:	Multi-Function Handset
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

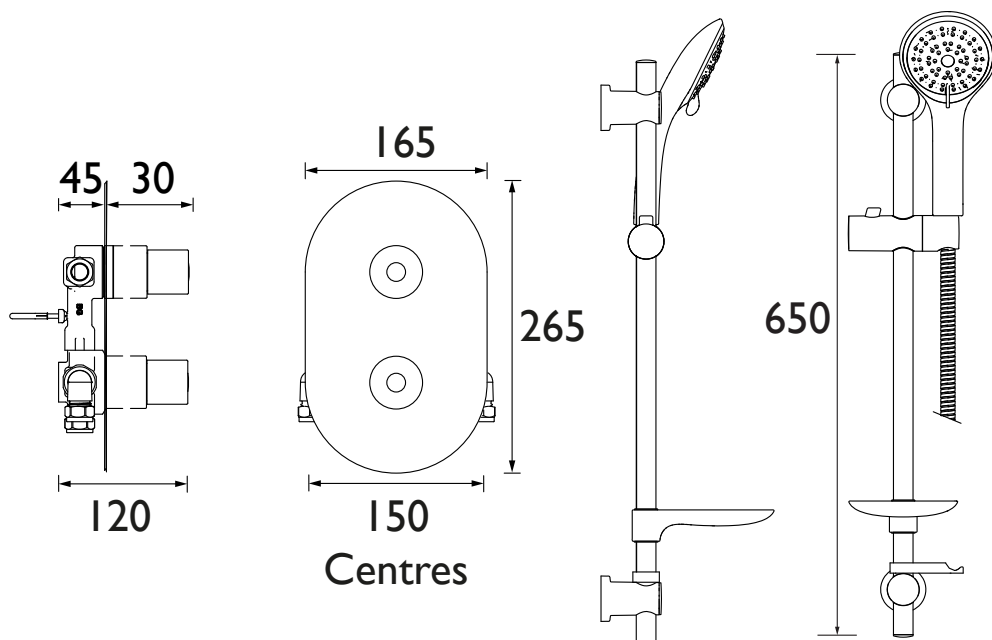

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	6.3	10	14.1	19.9	24.4	31.5

TECHNICAL
DATA
SHEET



BRISTAN

D8

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.