

DUL2 SHXARFF C

DU LEVER Shower Range

Design Utility Lever Safe Touch bar mixer with adjustable riser kit and fast fit wall fixings



Features:

- Honour classic design with the thermostatic Design Utility Safe Touch Bar Shower with kit in chrome plated finish, delivering modern functionality for mixer shower installations. The thermostatic cartridge with 38°C safety stop and automatic shut-off protection ensures family-safe showering, while the adjustable riser rail allows personalised height positioning.
- Fast, hassle-free installation with built-in front facing isolation valves that make it easy to fit, maintain and replace.
- Stay protected with Safe Touch technology that keeps the valve cool to the touch
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 250603003
WRAS Expiry Date: 30/06/2030
Kiwa TMV2 Cert No: 2601731
Kiwa TMV2 Expiry Date: 26/01/2031



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass, Zinc, Stainless Steel & ABS
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	Multi Function Handset
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	Yes
Check Valve Included:	No

Dimensions (measurements in mm)

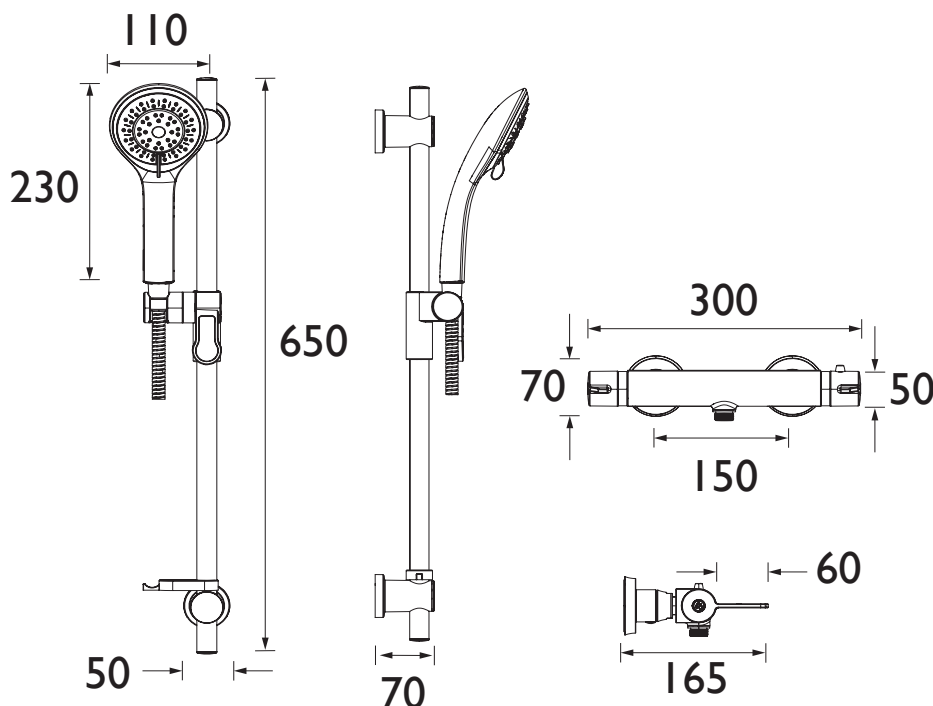

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset	2.6	4.5	6.7	15.7	9.7	16.9

TECHNICAL DATA SHEET



BRISTAN

D9

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.