

R2 SHXRR C

REGENCY Shower Range

Regency2 Thermostatic Surface Mounted Dual Control Shower Valve with Rigid Riser Chrome



Features:

- Bring timeless elegance to your bathroom with the Regency Thermostatic Dual-Control Mini Valve in a chrome-plated finish. It offers precise flow and temperature adjustment for a tailored shower experience. A built-in 41°C safety stop with override ensures peace of mind for every family member.
- Effortless fitting with adjustable brackets that reuse existing screw holes
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Supplied with everything you need, including shower valve, hose, hose retainer, fixed riser rail and a single function handset
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 240403011
WRAS Expiry Date: 30/04/2029
TMV2 Certificate No: 2503305
TMV2 Designation: HP-SE
TMV2 Expiry Date: 16/03/2030



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Concentric Mini Valve
Shower Head Type:	Fixed Head
Shower Kit:	Rigid Riser
Valve/Cartridge Type:	Thermostatic Concentric Cartridge
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	All systems, Preferably Balanced
Minimum Dynamic Pressure (bar):	0.1**
Maximum Dynamic Pressure (bar):	5**
**TMV2 Rated only between 1 bar minimum and 5 Bar Maximum Dynamic Pressure	
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

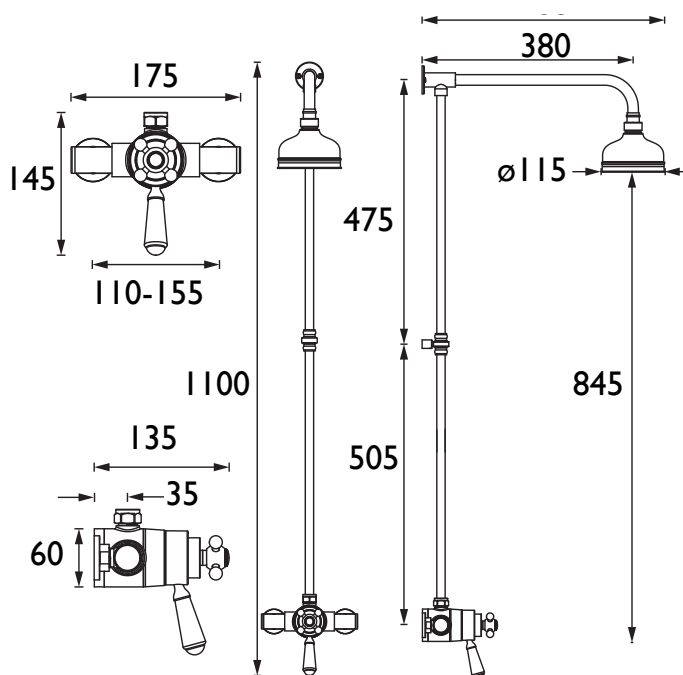

Flow Rates (l/min)

System Pressure (bar)	0.1	0.5	1	2	3	5
Valve Only (mixed)	5.6	12.5	17.7	25	30.6	39.5
Through Fixed Head (mixed)	2.4	5.4	7.6	10.8	13.2	17

TECHNICAL
DATA
SHEET



BRISTAN

D16

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.