

N2 SQSHXDIV C

1901 Shower Range 1901 Exposed Sequential Chrome Shower Valve with Rigid Riser Kit



Features:

- The 1901 Exposed Sequential Shower Valve in chrome combines Edwardian-inspired design with dual outlet functionality. Integrated flow regulation and a 42°C safety stop ensure consistent performance and family protection.
- Comes complete with diverter, shower rose, rigid riser, rub-clean anti-limescale handset and hose
- Save time and avoid plumbing changes with a shower that fits your existing pipework, thanks to adjustable inlets for centres between 136mm and 158mm.
- Save water without compromising performance thanks to two built-in 8L flow regulators
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 31/07/2027
WRAS Expiry Date: 2207908



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Sequential
Shower Head Type:	Both
Shower Kit:	Rigid Riser
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

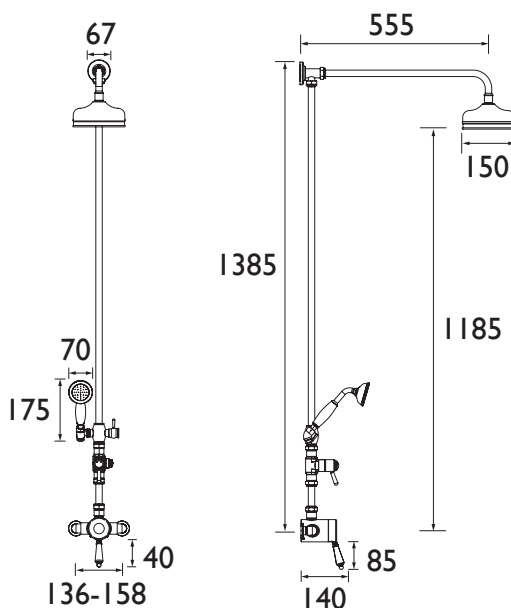

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Fixed Head (mixed)	5	10.4	15.7	22.8	28.3	36.5
Through Handset (mixed)	3.2	7.2	10.9	15.9	19.7	25.4
Through Fixed Head (with flow limiters)	NPD	9	11.6	12.2	12.4	10.8
Through Handset (with flow limiters)	NPD	6.7	10.3	11.6	12.3	10.6

TECHNICAL DATA SHEET



BRISTAN

D5

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.