PM2 CSHXAR C

PRISM Shower Range
Prism Exposed Concentric Chrome Shower Valve with Adjustable Riser Kit



Features:

- The versatile Prism Concentric Thermostatic Exposed Shower Valve with adjustable riser kit in chrome finish delivers reliable temperature control with integrated safety features. The rub-clean handset and flow regulator enhance daily performance while maintaining water efficiency.
- Enjoy peace of mind with a 42°C safety stop, including override when required
- Save water without compromising performance thanks to two built-in 8L flow regulators
- Save time and avoid plumbing changes with a shower that fits your existing pipework, thanks to adjustable inlets for centres between 136mm and 158mm.
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:

WRAS APPROVED PRODUCT


WRAS Certificate No: 2205904
WRAS Expiry Date: 31/05/2027

Unified Water Label 15.7 l/min

Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Valve
Shower Head Type:	Adjustable
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5.0
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2”
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

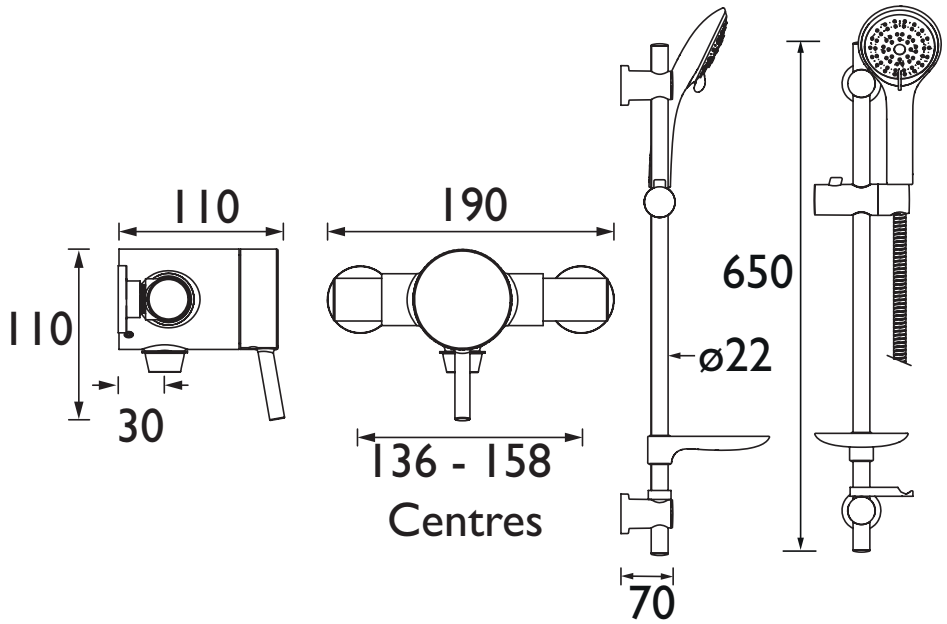

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	4.4	7	9.9	14	17.1	22.1
With Flow Limiters (mixed)	NPD	6.3	9.1	12.9	15.7	20.3

TECHNICAL DATA SHEET

LIFETIME GUARANTEE *

BRISTAN

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* **- Lifetime guarantee applies to products purchased on or after 01/04/2026.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.