PRISM SHWR PK2

PRISM Shower Range
Complete Prism Shower Pack 2



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	Both
Shower Kit:	Adjustable Riser & Fixed Head
Valve/Cartridge Type:	40mm Diverter & 35mm Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2”
Isolation Valve Included:	No
Check Valve Included:	Yes

Features:

- Supplied with everything you need, including shower valve with integral two outlet diverter, slimline 200mm round drench head with shower arm, and shower kit with an adjustable riser rail, plus a rub clean single function handset and wall outlet
- Keep your shower performing like new with rub-clean nozzles that wipe clean easily
- Enjoy peace of mind with a 42°C safety stop, including override when required
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Easy installation with an adjustable faceplate that fits total wall depths from 50mm to 75mm for a perfect flush finish


Product Certifications:

WRAS APPROVED PRODUCT

WRAS Certificate No: 2306911
WRAS Expiry Date: 30/06/2028

Unified Water Label 8.6 l/min

Dimensions (measurements in mm)

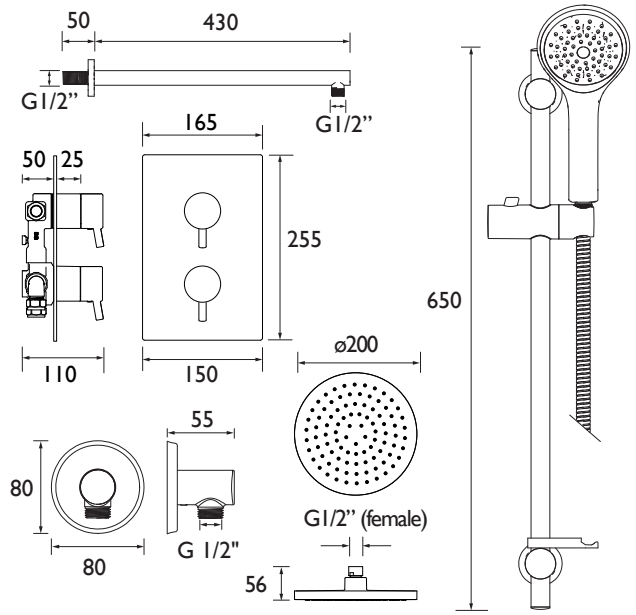

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	2.1	3.3	4.7	6.6	8.1	10.5
Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1
With Flow Limiters (valve only; mixed)	3.9	7	9.4	11.1	11.2	12.2

TECHNICAL DATA SHEET

LIFETIME GUARANTEE *

BRISTAN

D11

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Lifetime guarantee applies to products purchased on or after 01/04/2026.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.