

CRZ2 SHXDIVCTFF C

COOLTOUCH Shower Range Craze2 Adjustable Rigid Riser Diverter Bar Shower



Features:

- Supplied with everything you need, including bar shower valve, hose, telescopic riser rail and rub-clean anti-limescale drench head and multi function handset
- Easily adjust the height with a telescopic riser designed to fit your space, ideal for wet rooms, walk-in showers, or over-bath installations
- Fast, hassle-free installation with built-in front facing isolation valves that make it easy to fit, maintain and replace.
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:



WRAS Certificate No: 2306909
WRAS Expiry Date: 30/06/2028




For more products,
visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	ABS; Zinc Alloy; Stainless Steel
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	Both
Shower Kit:	Adjustable riser with Fixed Head
Valve/Cartridge Type:	Thermostatic Cartridge & 25mm Single Lever Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for high pressure systems
Minimum Dynamic Pressure (bar):	1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G1/2" and Riser Outlet
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

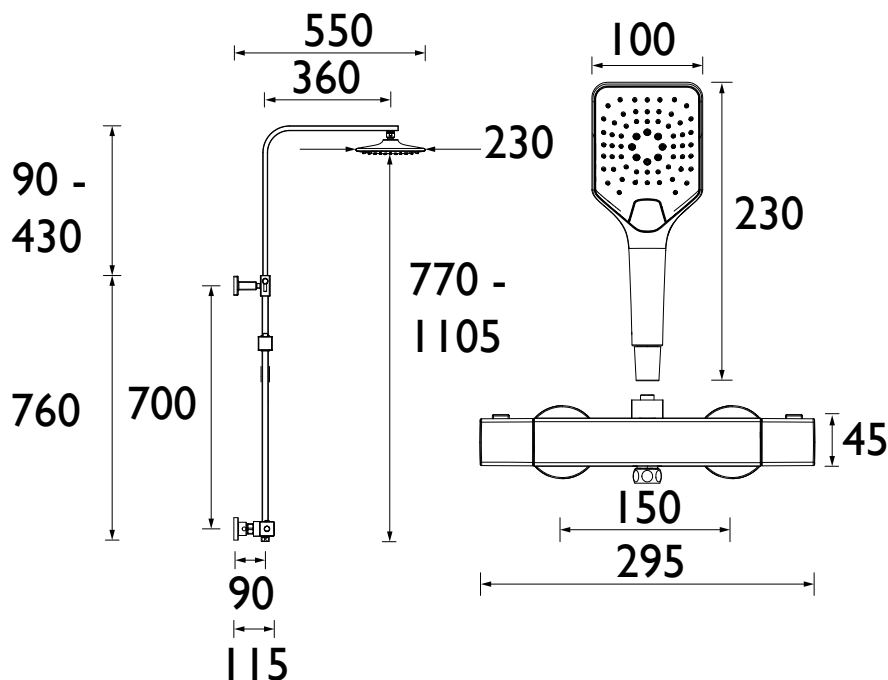

Flow Rates (l/min)

System Pressure (bar)	1	2	3	5
Through Handset (mixed)	5.5	7.8	9.6	11.8
Through Fixed Head (mixed)	5.8	8.7	10.2	12.5

TECHNICAL
DATA
SHEET



BRISTAN

D14

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.