

KIT100 C

SHOWER ACC Shower Range

Single-function Slide Bar Shower Kit



Features:

- Includes a single-function handset that's easy to keep pristine, with rub-clean nozzles for effortless removal of limescale and debris
- Supplied with everything you need, including 1.5m hose, riser rail, rub-clean anti-limescale handset and hose retainer
- Enjoy lasting brilliance with our flawless, scratch-resistant chrome finish that's salt spray tested for durability
- Built to last, backed by a lifetime parts and 1-year labour guarantee


Product Certifications:



WRAS Certificate No: 2310925
WRAS Expiry Date: 31/10/2028




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	00 Chrome Plated
Main Construction Material:	Brass
Shower Kit:	Adjustable Riser
Shower Head Type:	Single-function Handset
Rub Clean Handset:	Yes
Mounting Type:	Wall
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Static Pressure (bar):	10 bar
Maximum Hot Water Supply Temperature °C:	75
Connection Inlet:	G 1/2"
Connection Outlet:	N/A
Isolation Included:	No
Check Valve Included:	No
What's Included:	1 x Clam, 1 x Handset, 1 x 1.5M Hose Cone To Knurl Nut, 1 x Hose Retaining Ring, 1 x Slider Brackets, 1 x Fitting Instructions

Dimensions (measurements in mm)

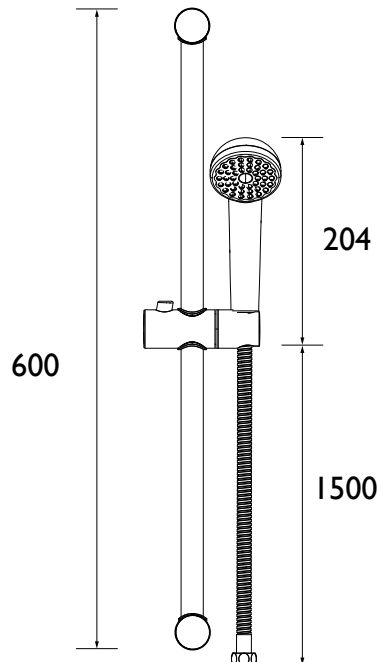

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	7.4	11.6	16.5	23.3	28.5	36.8

TECHNICAL DATA SHEET



BRISTAN

D8

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.